




Applied catalogue
Chillers
& air side




High performance and reliability for comfort and process applications

Daikin world

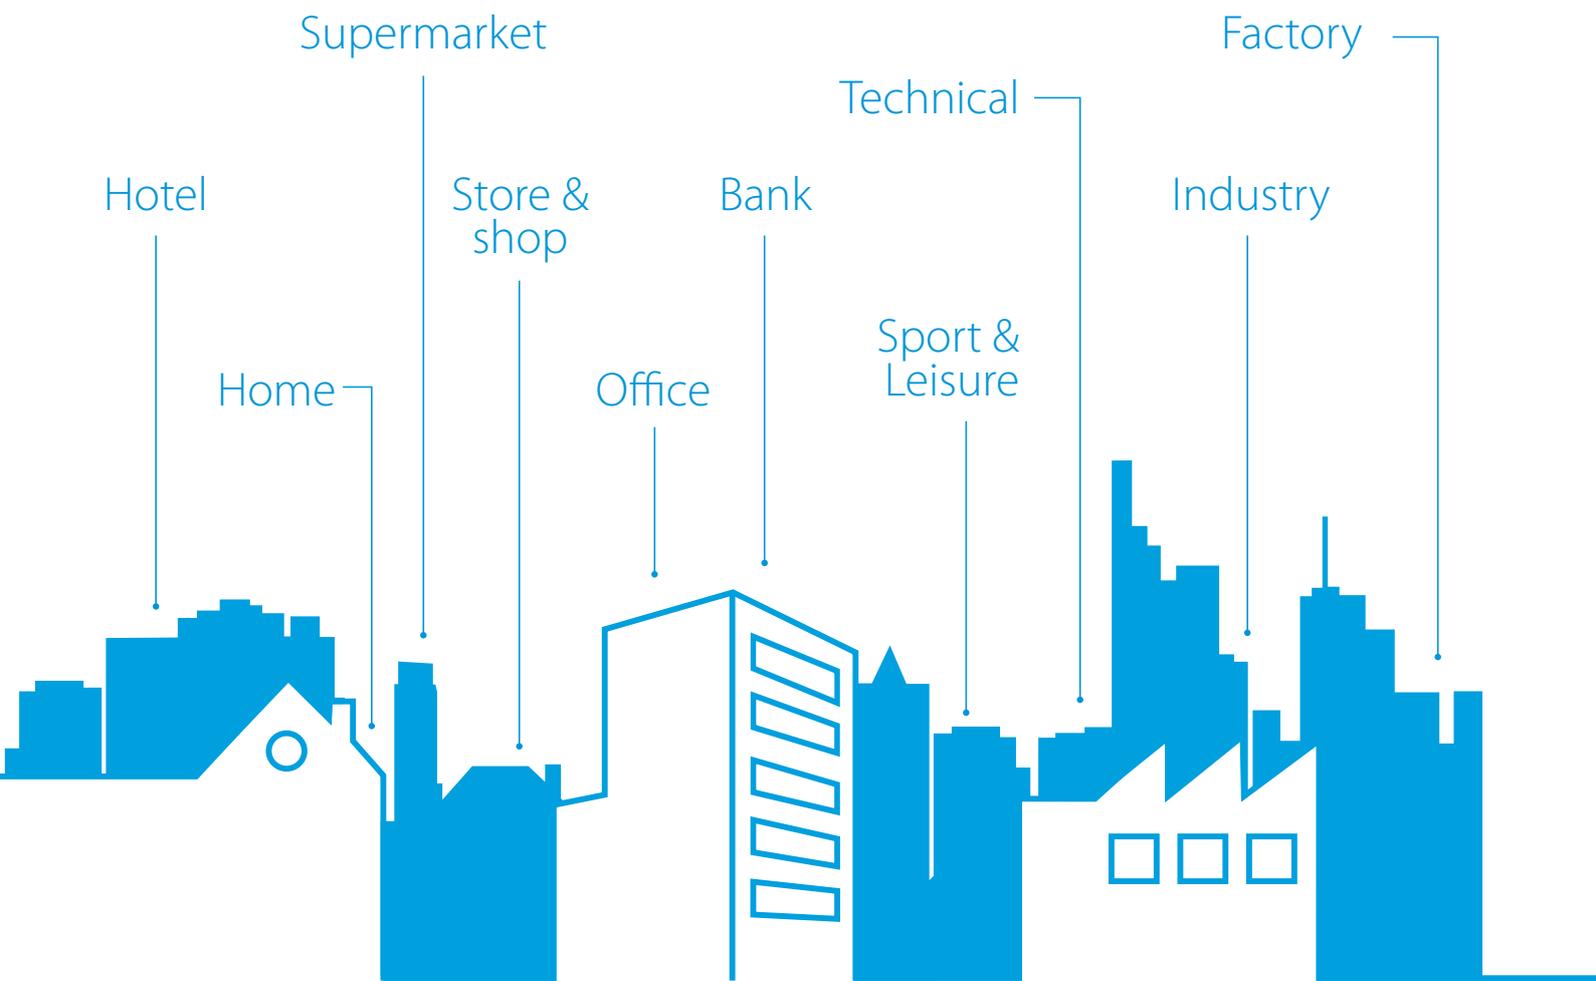

The perfect working environment is essential for all businesses. From supermarkets to offices, from public buildings to hotels, from factories to data centres it is essential that the quality of the air is optimised at all times. But no space is used in exactly the same way and that calls for flexible, tailored and economic solutions. Daikin, the innovation leader for more than 90 years, understands this. Its 'total solution' concept is built around customised solutions for individual clients – whether for cooling, heating, ventilation, air curtains or refrigeration with intelligent control systems.

Daikin has the units, the experience and the solutions for your business.

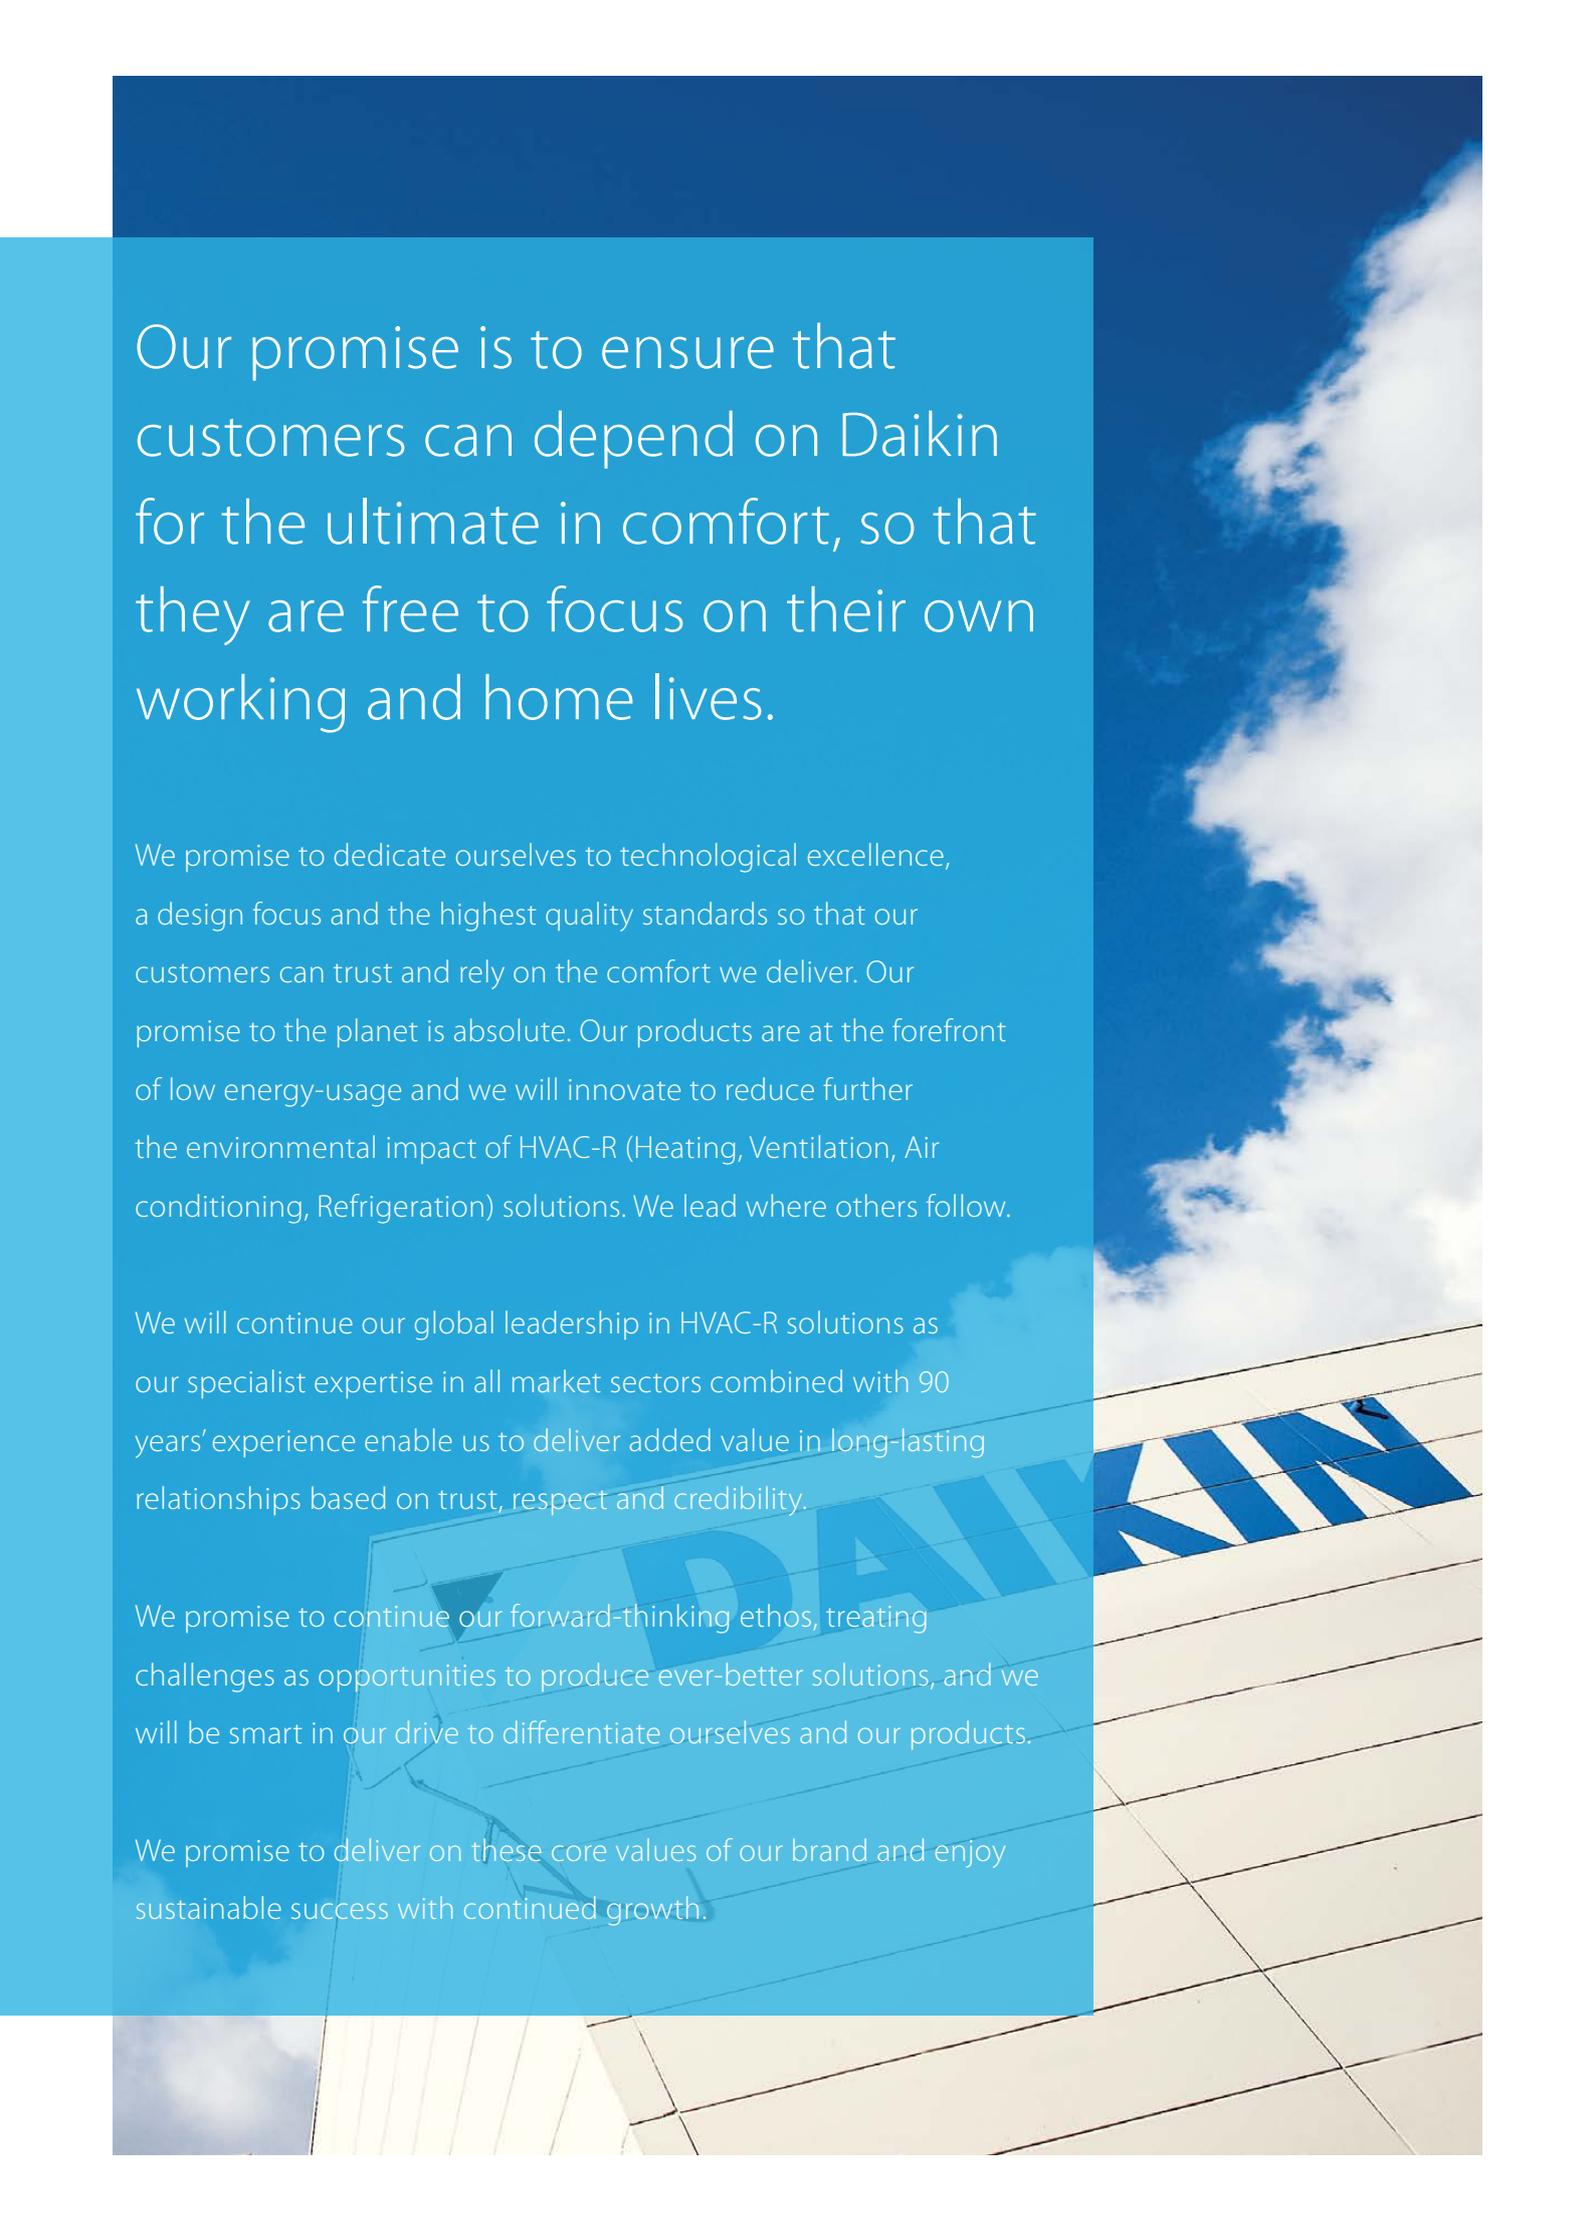The background of the page is a photograph of a building's exterior. The top half shows a bright blue sky with scattered white clouds. The bottom half shows a light-colored building facade with a large, blue, stylized 'DAIKIN' logo. A semi-transparent blue rectangular area is overlaid on the left side of the image, containing white text.

Our promise is to ensure that customers can depend on Daikin for the ultimate in comfort, so that they are free to focus on their own working and home lives.

We promise to dedicate ourselves to technological excellence, a design focus and the highest quality standards so that our customers can trust and rely on the comfort we deliver. Our promise to the planet is absolute. Our products are at the forefront of low energy-usage and we will innovate to reduce further the environmental impact of HVAC-R (Heating, Ventilation, Air conditioning, Refrigeration) solutions. We lead where others follow.


We will continue our global leadership in HVAC-R solutions as our specialist expertise in all market sectors combined with 90 years' experience enable us to deliver added value in long-lasting relationships based on trust, respect and credibility.

We promise to continue our forward-thinking ethos, treating challenges as opportunities to produce ever-better solutions, and we will be smart in our drive to differentiate ourselves and our products.

We promise to deliver on these core values of our brand and enjoy sustainable success with continued growth.

Contents

Daikin, your partner of choice	6
Tools and platforms	7
Low running costs	8
Seasonal efficiency	9
The best partner for your green project	10
Daikin Applied Development Center	11
Inverter technology	12
The phase-out period for R-22 is over	14
Day-to-day reliability and efficiency	16
Chillers	18
Product overview: chillers	22
Choose a Daikin air cooled chiller	26
Air cooled chillers (Cooling only)	27
Air cooled chillers (Heat pump)	69
Air cooled condensing units	81
Water cooled chillers	84
Condenserless chillers	101
Fan coil units	109
Product overview: fan coil units	114
Air handling units	131
Control systems, options & accessories	140
Control systems	140
Options & accessories	151

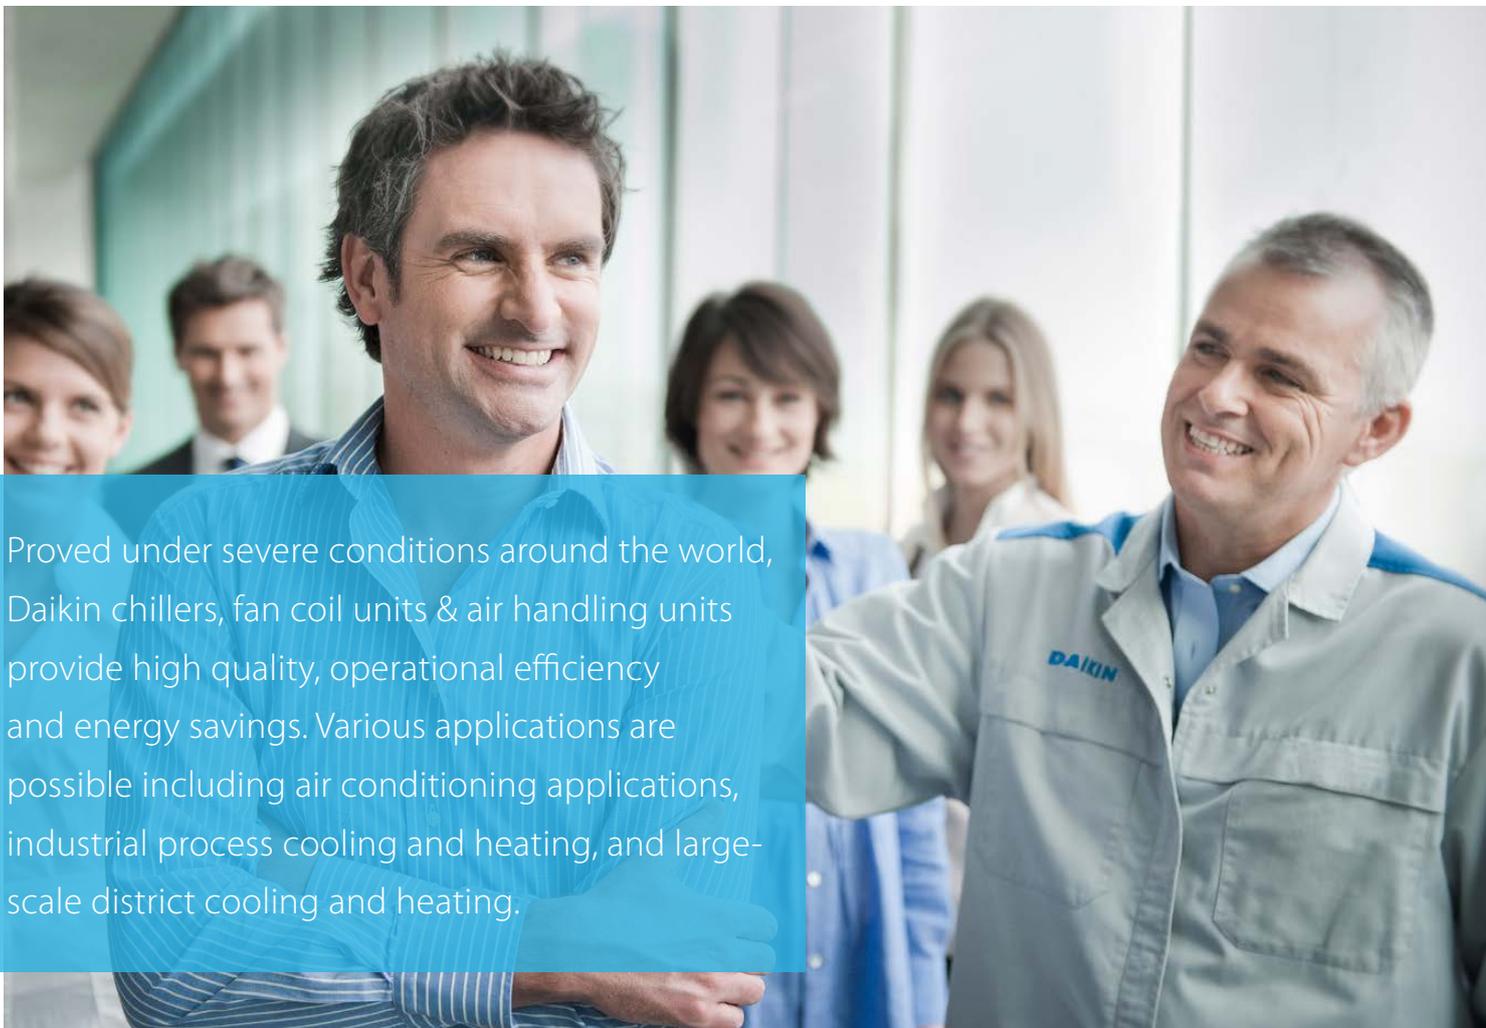

Proved under severe conditions around the world, Daikin chillers, fan coil units & air handling units provide high quality, operational efficiency and energy savings. Various applications are possible including air conditioning applications, industrial process cooling and heating, and large-scale district cooling and heating.

A partner of choice

Daikin is Europe's leading manufacturer and global No1 of highly energy-efficient heating, cooling, ventilation and refrigeration solutions for residential, commercial and industrial applications.

As the industry leader, we will continue creating new values by anticipating the future needs of customers for all environments.

The comfort of reliability

Nobody in business wants complexity, because it often leads to mistakes, delays or losses. Unfortunately, the world we are all doing business in, is sometimes quite complex. When looking for further business development, we all expand our national and international operations. And that doesn't make things easy.

As a small scale business or multinational company, you deserve the best partners. Partners that can take away the headaches and make you feel comfortable again. With Daikin, you have found such a partner. Because Daikin would like things to be easy ... for you.

Daikin quality

Daikin's much-envied quality stems quite simply from the close attention paid to design, production and testing as well as after sales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.

Staff who understand you

Daikin and its staff of devoted engineers, consultants and analysts are ready to assist you on a daily basis in setting up nationwide or international agreements, providing advice on equipment selection and monitoring regulations. Our goal is to help you carry out your plans with confidence, using custom-designed systems that meet your needs (for comfort, performance levels, etc.).

Tools and platforms


Have a question, looking for specific software applications, need detailed product information or looking for any other marketing tools? This overview gives you an idea of what we can offer.

Selection software

Daikin UK offers a variety of selection reports and simulation tools to support your choices.


Chiller selection software

Our new online chiller selection software will enable you to select proper units based on application type, efficiency level, fans, compressor type, operating mode, required capacity and other various factors. The user can select multiple solutions and generate detailed reports and databooks.

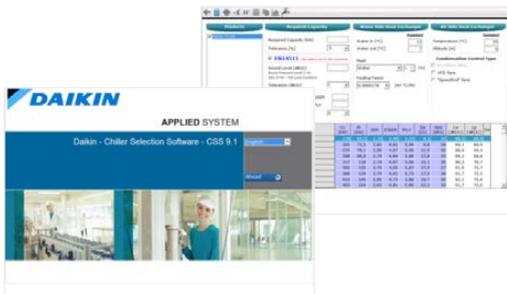

Air handling units selection software (ASTRA)

ASTRA is the powerful software that Daikin has developed to offer a quick and comprehensive service for the customer, to facilitate finding the right balance of performance and cost in an air handling unit.

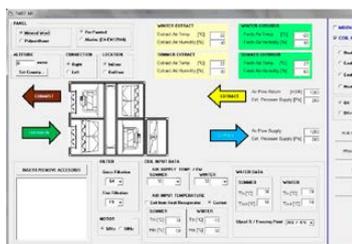

Online support

New business portal

- Experience our new extranet that thinks with you.
- > Find information in seconds via a powerful search
- > Customize the options so you see only the information that is relevant to you
- > Access via mobile or desktop via **my.daikin.co.uk**

Internet

Find our solutions for different applications on **www.daikin.co.uk**

Daikin E-data app for tablet

Find out in your own language which Daikin products are available in your market.



Literature

All literature available can be downloaded via **my.daikin.co.uk**

Low running costs

from reliable and renewable energy to maximise your customers' comfort

Energy from the air

What could be simpler? The air is the ultimate in renewable energy. Taking heat from the air reduces the running costs of the system, is ecologically friendly and totally reliable. What better way to maximise a customers' comfort. By using our advanced air-to-water heat pump technology to extract heat from the surrounding air, the cost of running the system is reduced by up to 75%. It's a truly innovative solution.


Total solution

Daikin offers a single point of contact for all the design and maintenance requirements for your integrated climate control system. Our equipment has proven reliability built in and so by ensuring that you have the right mix of units we know that you will be able to achieve optimal comfort with low maintenance costs. But what is more, our units deliver maximum energy efficiency and the minimum of operating costs.

Heat pump technology

Air-to-air heat pumps obtain 75% of their output energy from a renewable source: the ambient air, in summer and winter, even when it is freezing outside; air which is both renewable and inexhaustible.

A heat pump's efficiency is measured in SCOP (Seasonal Coefficient Of Performance) for heating and ESEER (European Seasonal Energy Efficiency Ratio) for cooling.

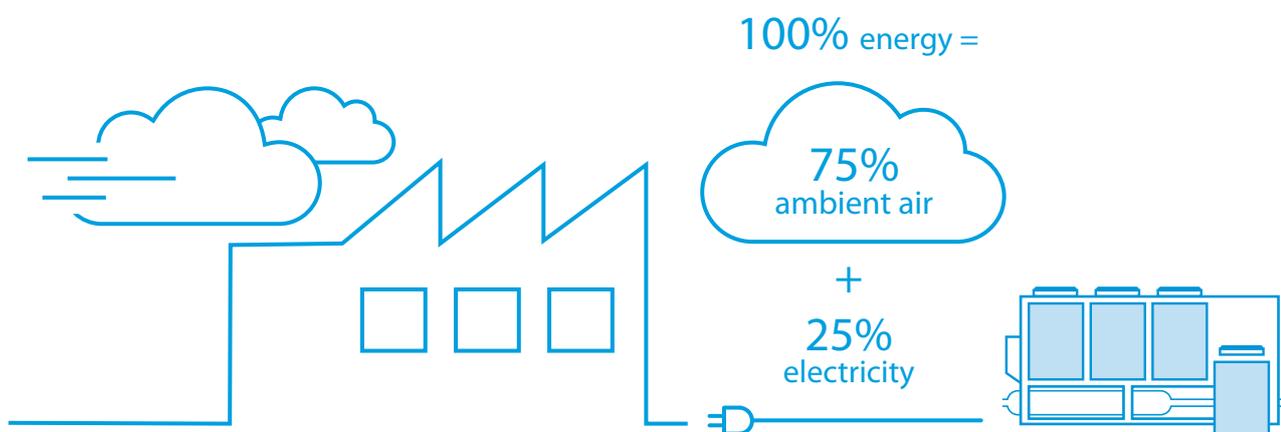


Seasonal efficiency, Smart use of energy

Challenging 20-20-20 environmental targets

The European Commission has set challenging targets for improving energy efficiency in the EU. These so-called 20-20-20 targets aim at a 20% reduction in CO₂ emissions, 20% share of renewable energy and a 20% reduction in the use of primary energy, all by the year 2020. To realise these objectives, Europe issued the Eco-Design Directive [2009/125/EC]. This sets minimum efficiency requirements for energy related products.

European action plan 20-20-20

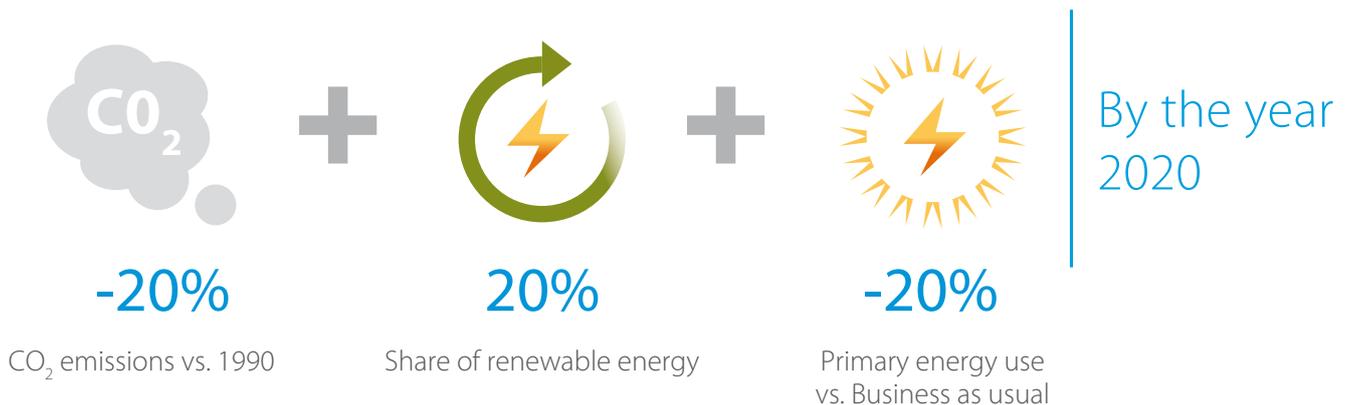

Applied systems: products in scope

Since 2013, all air conditioners and air-to-air heat pumps under 12kW are in scope of this Eco-Design directive.

Since 26 September 2015, heat generators for space heating (LOT 1) also need to comply to these 20-20-20 targets. For the applied systems market it means that all heat pumps below 400kW need to comply to minimum efficiency requirements. Heat pumps below 70kW must be marked with a product energy label.

Our service

Daikin helps its partners to meet their obligations regarding the Eco-Design Directive and energy labelling. Labels, product and technical fiches for each individual product are available as downloads at any time from the Energy Label Generator at www.daikin.co.uk/energylabel/Lot1-2/daikin

BREEAM®

Daikin, the best partner for your green project

From 2015 onwards the majority of new building projects in Europe are expected to be green.

93% percent of developers and investors consider green certification important.

BREEAM and LEED green building programmes are the two most important sustainable building certificates in Europe, covering more than 75% of the total sustainable-building certificate market.

Property developers are setting high standards

- › Aiming for a BREEAM Excellent or LEED Gold target is no longer rare
- › The real challenge? Achieving these targets while staying within budget

HVAC-R systems play an important role

- › Within the total green assessment and investment cost
- › They require the alignment of many different parties

It is essential to choose an HVAC-R partner with the knowledge and portfolio to achieve your BREEAM or LEED objectives, and other green needs.

Daikin has successfully participated in many sustainable projects. Helping builders achieve BREEAM Excellent and similar certificates has become one of our specialities.



We have a team of BREEAM accredited professionals (APs) at your service!

- › Over 17 APs across Europe
- › Assisting you to achieve your BREEAM certificate



You get maximum support in scoring BREEAM credits & LEED points:

- › Daikin Total HVAC-R Solutions
- › High seasonal efficiency technologies
- › Smart energy management with intelligent network
- › Boost your end score with innovative products and technologies

Maximise your BREEAM and LEED green building programme score with Daikin solutions

› Manage up to 70% of your energy consumption with the Daikin Total Solution

› Top seasonal efficiency

The BREEAM building program puts strong emphasis on energy efficiency, making Daikin an ideal partner.

› Smart air conditioning management with Intelligent Network

To drastically reduce your energy consumption and CO₂ emissions it's not enough to simply make your equipment more efficient.

BREEAM is a registered trademark of BRE (the Building Research Establishment Ltd. Community Trade Mark E5778551). The BREEAM marks, logos and symbols are the Copyright of BRE and are reproduced by permission.

Daikin Applied Development Center

Opened in May 2009, the Daikin Applied Development Center is the world's most advanced facility for heating, ventilation and air conditioning (HVAC) research and development. The purpose of the centre is to develop and test advanced chiller, compressor and other HVAC technologies to reduce energy consumption and, ultimately the carbon footprint of the buildings where they will be used.

The Daikin Group – Global Leader in HVAC Solutions

Daikin leads in the use of technologies that help preserve the environment, such as those that conserve energy and deliver high reliability to its customers. Daikin flexible applied systems deliver high efficiency for commercial, institutional and industrial buildings. The Applied Development Center allows the Daikin Group to fully leverage these strengths and accelerate the development of applied products that support the environment, energy savings, innovation, leadership and the best customer comfort.

Inverter technology




Traditional electric motors run at full load even when not needed (in chiller part load operations), resulting in energy waste.

Since in a building most of the energy consumption comes from HVAC systems and the cooling/heating load varies during the year depending on the application, energy saving becomes vital, especially with the current soaring price of energy and global warming concerns.

VFD (Variable Frequency Drive) allow compressors, fans and pumps to run most efficiently at partial loads, using only the power necessary to match the load, providing an efficient solution for most HVAC applications.

For the majority of the operation time, the cooling or heating capacity will be lower than the peak design condition. For instance the UK Part L SEER calculation for offices only considers full load operation for 12% of the time. With the remaining 88% of the time spent at partload, maintaining efficiency is vital.

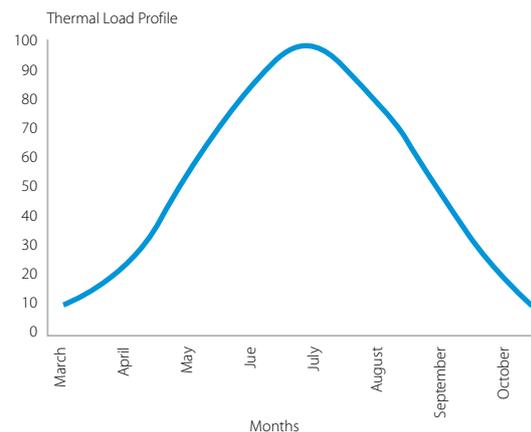



Inverter technology improves energy efficiency and comfort levels

What are your benefits when choosing an inverter chiller?

› **Energy efficient: displacement power factor always > 0.95**

Usually the power factor of a motor progressively worsens with the decrease of the power output. However, thanks to the inverter, there is no need for additional power factor correction capacitors as the power factor is always > 0.95.

› **Quick start-up**

This feature enables the chiller to restart within 30 seconds of the power being restored and reach full-load cooling capacity in less than 6 minutes. Ideal for applications in which a loss of cooling would be critical to catastrophic, for example data centres, health care facilities, and process cooling applications.

› **Less frequent start/stop cycles and low starting current**

The inverter technology ensures fewer start/stop cycles as well as ensuring that the start-up current is always lower than the current absorbed at maximum operating conditions (FLA). This generates obvious cost savings.

› **Seasonal quietness: reduced sound levels**

Sound levels are minimised whenever possible by varying the compressor speed in partial load conditions.

All the benefits of inverter technology combine to minimise running costs over the life of the system.

The phase-out period for R-22 is over. Act now!

Chiller modernisation

Our concept

Even if an R-22 chiller has been maintained well and is still in good condition, its refrigerant can no longer be recharged or topped up. That's why Daikin offers chiller modernisation packages. Not only is the chiller made compliant with the latest legislation, the technology upgrade also revives your system, increasing reliability and efficiency.

Main benefits

- › Convert R-22 systems to be compliant with legislation
- › Limited investment
- › Save money for future equipment thanks to the chiller's longer lifetime, increased reliability, and improved maintenance efficiency
- › Enhance energy efficiency up to +20% ESEER by manufacturer pre-engineered upgrade

Benefits for budget and risk management

- › No chiller removal
- › No water pipe work modifications
- › No electrical modifications
- › Low logistics (transport, craning, permissions ...)
- › Quick delivery
- › Government-sponsored subsidies may be available



Controller box upgrade



Fact: R-22 has been banned in UK and Europe*

Since 31 December 2014, repairs to R-22 systems have been prohibited – so a system breakdown now could have a serious impact on your business. Cut your risk with Daikin replacement technology.



- Soft starter
- Inverter

Compressor upgrade



* EU directive: Regulation (EC) No.2037/2000


Day-to-day reliability and efficiency

In-house development and manufacturing of compressors

Unlike many other air conditioning manufacturers, Daikin manufactures its own swing, scroll and screw compressors. This is important because the compressor is the very heart of the air conditioning system, increasing the pressure and temperature of the refrigerant vapour, effectively concentrating the heat as it passes around the system. Daikin has always been at the forefront of developing compressor technology and now offers a comprehensive range of swing, scroll, screw and centrifugal compressors. As a result, inverter compressor control is applied throughout our product range, delivering enhanced comfort and system efficiency.



Swing compressor

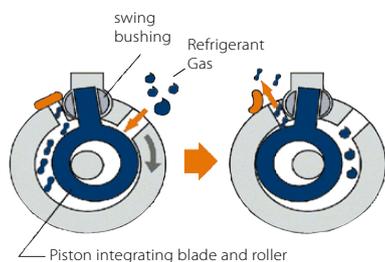

The mini chiller series EWAQ005-007ADVP & EWYQ005-007ADVP are equipped with a swing inverter compressor. This innovative design by Daikin has fewer moving parts allowing a smoother, more reliable operation with low vibration and low noise levels. The high-efficiency motor reduces energy consumption, resulting in energy cost savings.



Scroll compressor for controlled capacity


Being compact, the Daikin scroll compressor is used with R-407C and R-410A to provide constant reliability and high efficiency throughout its service life. Designed for small and medium capacities, the scroll compressors are used with air cooled and water cooled chillers.

Characteristics:

- > Compact, simple yet robust design
- > Absence of valves and oscillating connecting mechanisms providing maximum reliability
- > Constant compression guaranteeing low energy consumption
- > Increased compression efficiency thanks to the absence of volumetric re-expansion
- > Low sound level
- > Low starting current



Innovative frictionless centrifugal compressor

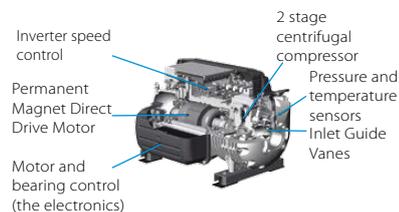


The innovative frictionless centrifugal compressor has an integrated VFD, as well as magnetic bearings, and delivers high levels of unit efficiency and reliability. The compressor's only moving parts - the rotor shaft and impellers - is powered by the permanent magnetic direct-drive motor and kept levitated by a digitally controlled magnetic bearing system. Having so few moving parts significantly increases unit reliability and reduces maintenance costs. As the condensing temperature and/or cooling load reduces, the speed of rotation reduces and movable inlet guide vanes, activated by the step motor, redirect gas flow into the first stage impeller once the compressor has reached its minimum speed. This delivers increased efficiency and cost savings during part-load operations.

Whatever the customer needs - large systems requiring constant capacity or small systems for flexibility - Daikin always provides a reliable and efficient solution.



The single-screw stepless compressor for high capacity

At the heart of the larger Daikin chillers is a semi hermetic single screw compressor, designed, tested and manufactured in Daikin's own factories, in order to meet the highest capacity, performance and maintenance specifications. This compressor has been especially developed for operation with R-410A or R-134a refrigerants, guaranteeing unequalled reliability and many years of efficient operation. The bearing life is 100,000 hours with inspection and maintenance intervals every 40,000 hours.

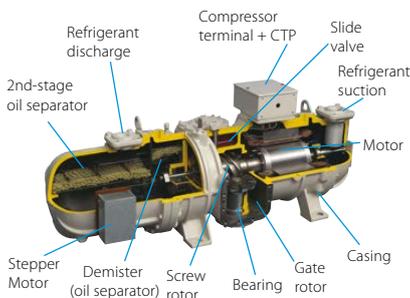

Characteristics:

- › Optimal performance through stepless capacity control chilled water temperatures. The unit capacity is infinitely variable from 30 - 100% on single circuit units and 15 -100 % on dual circuit units.
- › Compact, simple yet robust construction.
- › Using a main single screw and two gate rotors, axial and radial forces are balanced, thanks to the symmetrical compression guaranteeing low bearing loads.
- › Gate rotors made of polymer material result in closer tolerances with the main screw and reduced friction greatly improves compressor

efficiency and lifetime.

- › No oil pump necessary - lubrication based on the differential pressure principle.
- › Easy access to both compressor and safety devices.
- › Star-Delta starter with low starting current as standard.



Screw compressor with integrated inverter (EWAD-TZ)


Characteristics:

- › Compressor and inverter fully designed by Daikin
- › Inverter integral to the compressor body
- › Inverter refrigerant cooled
- › VVR = Variable Volume Ratio for optimized efficiency
- › Enlarged discharge port and suction side for reduced refrigerant pressure drop
- › New optimized compressor motors

Main benefits:

- › Better ESEER & EER values
- › 30% more compact than single-screw compressor
- › Rapid payback time
- › Silent operations
- › Optimal comfort levels

NEW

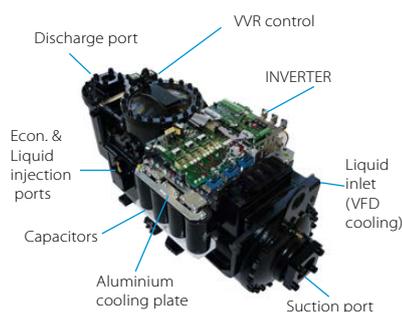



Daikin chillers

Always choose Daikin chillers

The widest and most flexible chiller portfolio

- › From the smallest chiller for residential use to the largest chiller for district cooling
- › Tailor-made solutions based on the most advanced technologies

Worldwide experience in chiller design and manufacturing

- › World's most advanced facilities for air conditioning research and development: the Applied Development Center in Minneapolis, Minnesota
- › Inhouse development and manufacturing of chiller main components (compressors, fans, condenser coils, software, etc...)

The highest efficiency for every installation

- › The lowest total cost of ownership and fast payback time

Quality and reliability

- › Daikin's integrated zero defect policy ensures quality of components and finished products
- › Each Daikin chiller is factory run-tested and subjected to quality audit before shipment

Benefits for the installer

- › Plug & Play solutions
- › Maximum serviceability
- › Ideal solutions for retrofit projects

Benefits for the consultant


- › Energy efficient solutions without compromising on reliability and performance
- › Latest technology embedded in all our products

Benefits for the end user

- › Remarkable savings on running costs
- › "Green" solutions to preserve the environment
- › Eurovent and AHRI certification

Chiller selection software

- › The new Daikin online chiller selection software will allow consultants and building engineers to select proper units based on application type, efficiency and sound level and required capacity. The tool presents all possible series and generates for selected units a detailed technical data book.

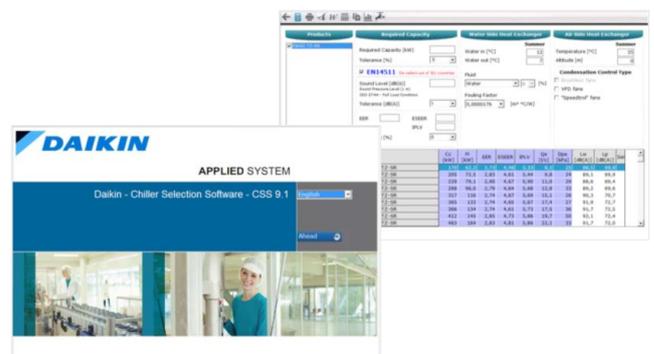



Lower your running costs

with our energy saving options

Heat recovery (option No01-03)

For those particular applications where heating and cooling may be required at the same time during operation of the chiller (e.g. hotels, manufacturing, hospitals) partial or total heat recovery options are available. The heat recovery technology extracts heat from the cooling process to ensure free or low-cost heating for other facilities in your company.

Rapid restart (option No110)

In case of power failure the Daikin chillers can quickly restart and load up to 100 % in a very short time (typically less than 6 minutes versus circa 20 minutes in case of a standard chiller) Rapid restart means lower impact on the customer side especially in critical applications where they cannot afford to lose cooling: e.g. data centers and hospitals




Free cooling (option No113)

Free cooling uses cold air from outside to assist in chilling water for applications such as data centers that need cooling during cold season. When the ambient air temperature drops below a set point, all or part of the chilled water bypasses the existing chiller and runs through the free cooling system, thus using less power.

When outside temperatures are +2°C or lower, the chiller compressors are fully shut down and cooling is almost for free. This dramatically reduces the load on the system and cuts energy consumption by up to 75%, as well as prolonging the lifespan of the chiller.


PRINTING COMPANY APPLICATION

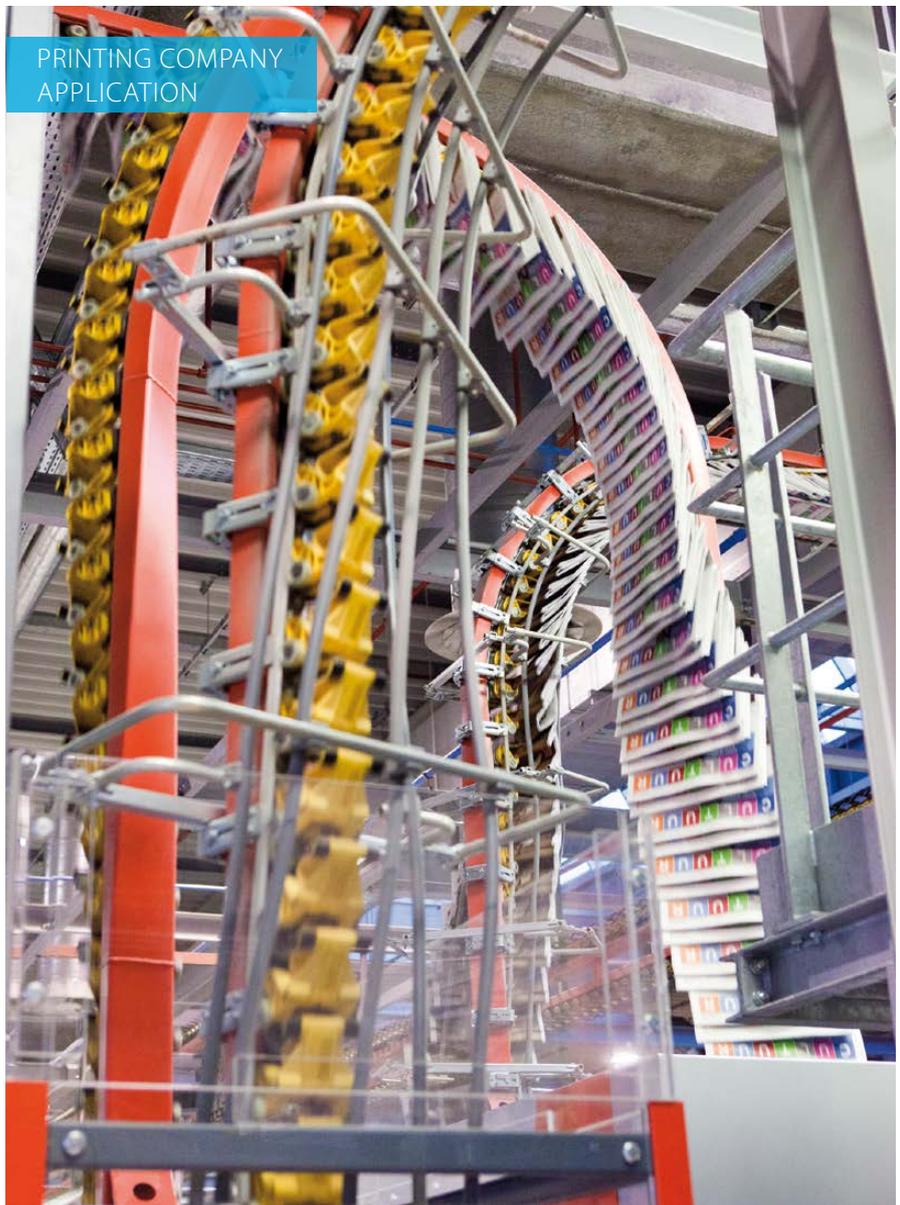

AIR COOLED CHILLER INSTALLATION




AIR COOLED CHILLER INSTALLATION

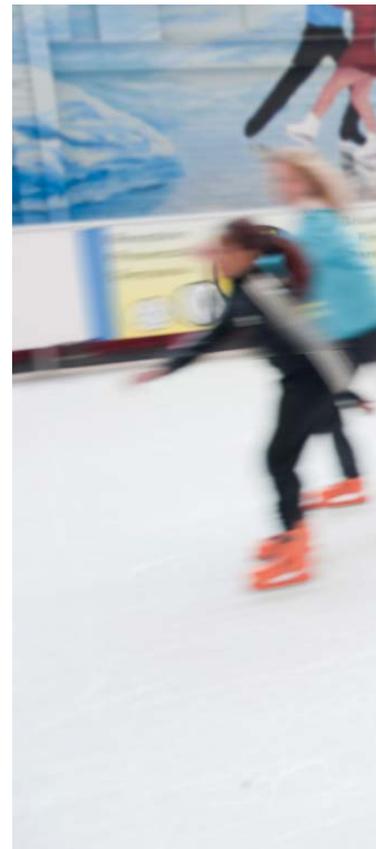

EWAQ-GZXR
INSTALLATION



DATA CENTER
APPLICATION

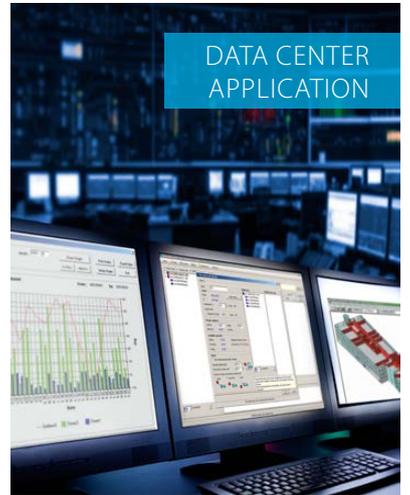

PROCESS COOLING
APPLICATION



ICE RINK
APPLICATION




Products overview

	Refrigerant type *	Refrigerant circuits	Inverter	Free cooling	Compressor			Water heat exchanger		Efficiency version				Sound version			
					Swing	Scroll	Screw	Plate **	Single pass shell and tube	Standard	High	Premium	High ambient	Standard	Low	Reduced	Extra low
Cooling only																	
EWAQ~ADVP	 R-410A	1	●		●			●		●				●			
EWAQ~ACV3/ACW1	 R-410A	1	●			●		●		●				●			
EWAQ~BA*	 R-410A	1	●			●		●		●				●			
EWAQ~G- NEW	 R-410A	1				●		●		●	●			●		●	
EWAQ~E-	 R-410A	1				●		●			●			●	●	●	
EWAQ~F-	 R-410A	2				●		●		●	●			●	●	●	
EWAQ~GZ	 R-410A	1-2	●			●		●			●			●		●	
EWAD~E-	 R-134a	1					●	●		●				●	●		
EWAD~D-	 R-134a	2					●	●	●	●	●		●	●	●	●	
EWAD~C-	 R-134a	2-3					●	●	●	●	●	●		●	●	●	
EWAD~CZ	 R-134a	2-3	●				●	●			●			●	●	●	
EWAD~CF	 R-134a	2		●			●	●			●			●	●	●	
EWAD~TZ	 R-134a	1-2	●				●	●	●	●				●		●	
Heat pump																	
EWYQ~ADVP	 R-410A	1	●		●			●		●				●			
EWYQ~ACV3/ACW1	 R-410A	1	●			●		●		●				●			
EWYQ~BA*	 R-410A	1	●			●		●		●				●			
SEHVX-AAW SERHQ-AAW1	 R-410A	1	●			●		●		●				●			
EWYQ~G- NEW	 R-410A	1				●		●			●			●		●	
EWYQ~F-	 R-410A	1-2				●		●			●			●	●	●	
EWYD~BZ	 R-134a	2-3	●				●	●	●	●				●	●		
Condensing unit																	
ERAD~E-	 R-134a	1					●			●				●	●		

* (GWP) : R-410A (2087.5), R-134a (1430)
 ** BPHE: Brazed plate heat exchanger
 *** Mandatory Commissioning by Daikin Airconditioning UK

Cooling capacity (kW)
Heating capacity (kW)

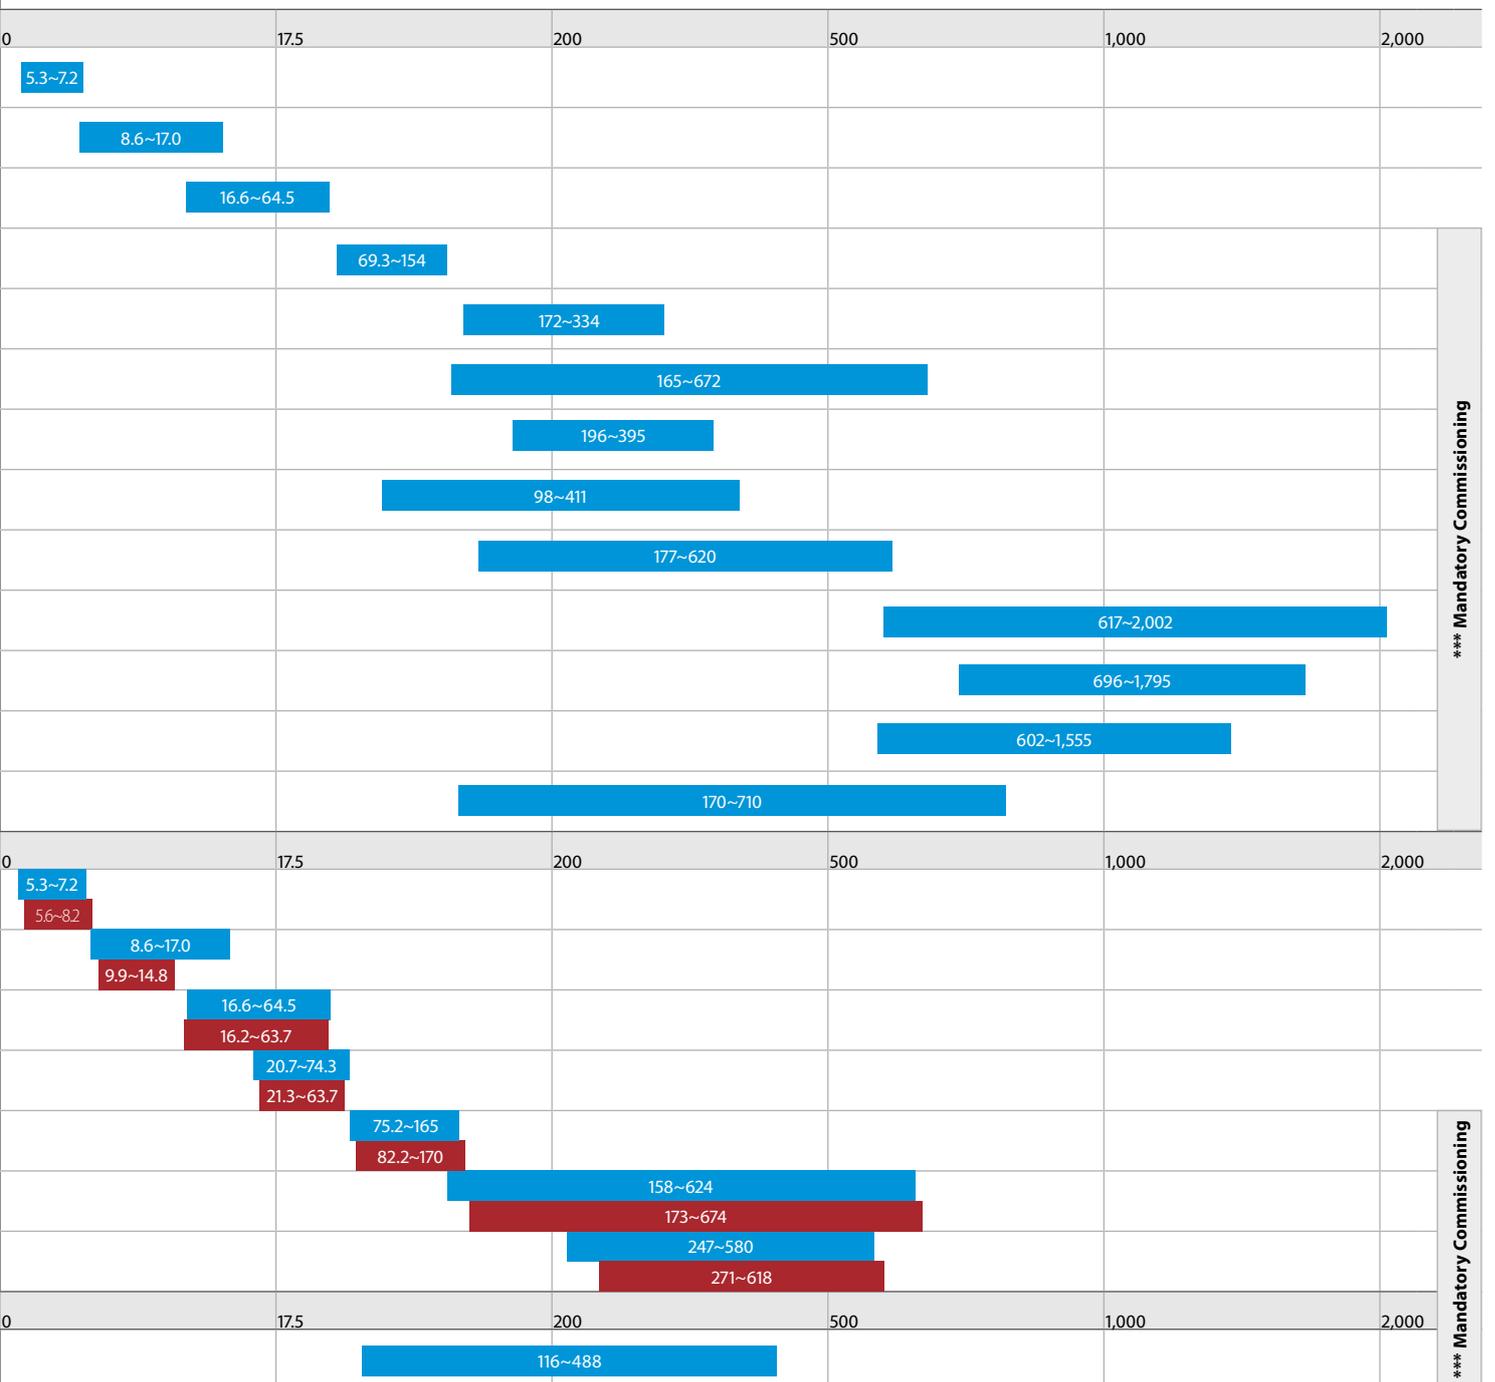


Products overview

	Refrigerant Type *	Refrigerant circuits	Inverter 	Compressor			Water heat exchanger		Efficiency version		Sound version
				Scroll 	Screw 	Centrifugal 	Plate **	Single pass shell and tube	Standard	High	Standard
Water cooled chillers (Cooling only & Heating only)											
EWWP~KBW1N 	R-407C	1-2-4-6		●					●		●
EWHQ~G- NEW 	R-410A	1		●			●				
EWWQ~G- NEW 	R-410A	1		●			●		●		●
EWWQ~L- NEW 	R-410A	2		●			●		●		●
EWWD~J- 	R-134a	1-2			●		●		●		●
EWWD~G- 	R-134a	1-2			●			●	●	●	●
EWWD~I- 	R-134a	1-2-3			●			●	●	●	●
EWWD~H- 	R-134a	1			●			● Flooded		●	●
Water cooled chillers (Cooling only)											
EWWQ~B- 	R-410A	1-2			●			●	●	●	●
Condenserless chillers											
EWLP~KBW1N 	R-407C	1-2		●			● BPHE		●		●
EWLQ~G- 	R-410A	1		●			●		●		●
EWLQ~L- 	R-410A	2		●			●		●		●
EWLD~J- 	R-134a	1-2			●		●		●		●
EWLD~G- 	R-134a	1-2			●			●	●		●
EWLD~I- 	R-134a	1-2-3			●			●	●		●

* (GWP) : R-410A (2087.5), R-134a (1430), R-407C (1,773.9)
 ** BPHE: Brazed plate heat exchanger
 *** Mandatory Commissioning by Daikin Airconditioning UK

Cooling capacity (kW)
Heating capacity (kW)

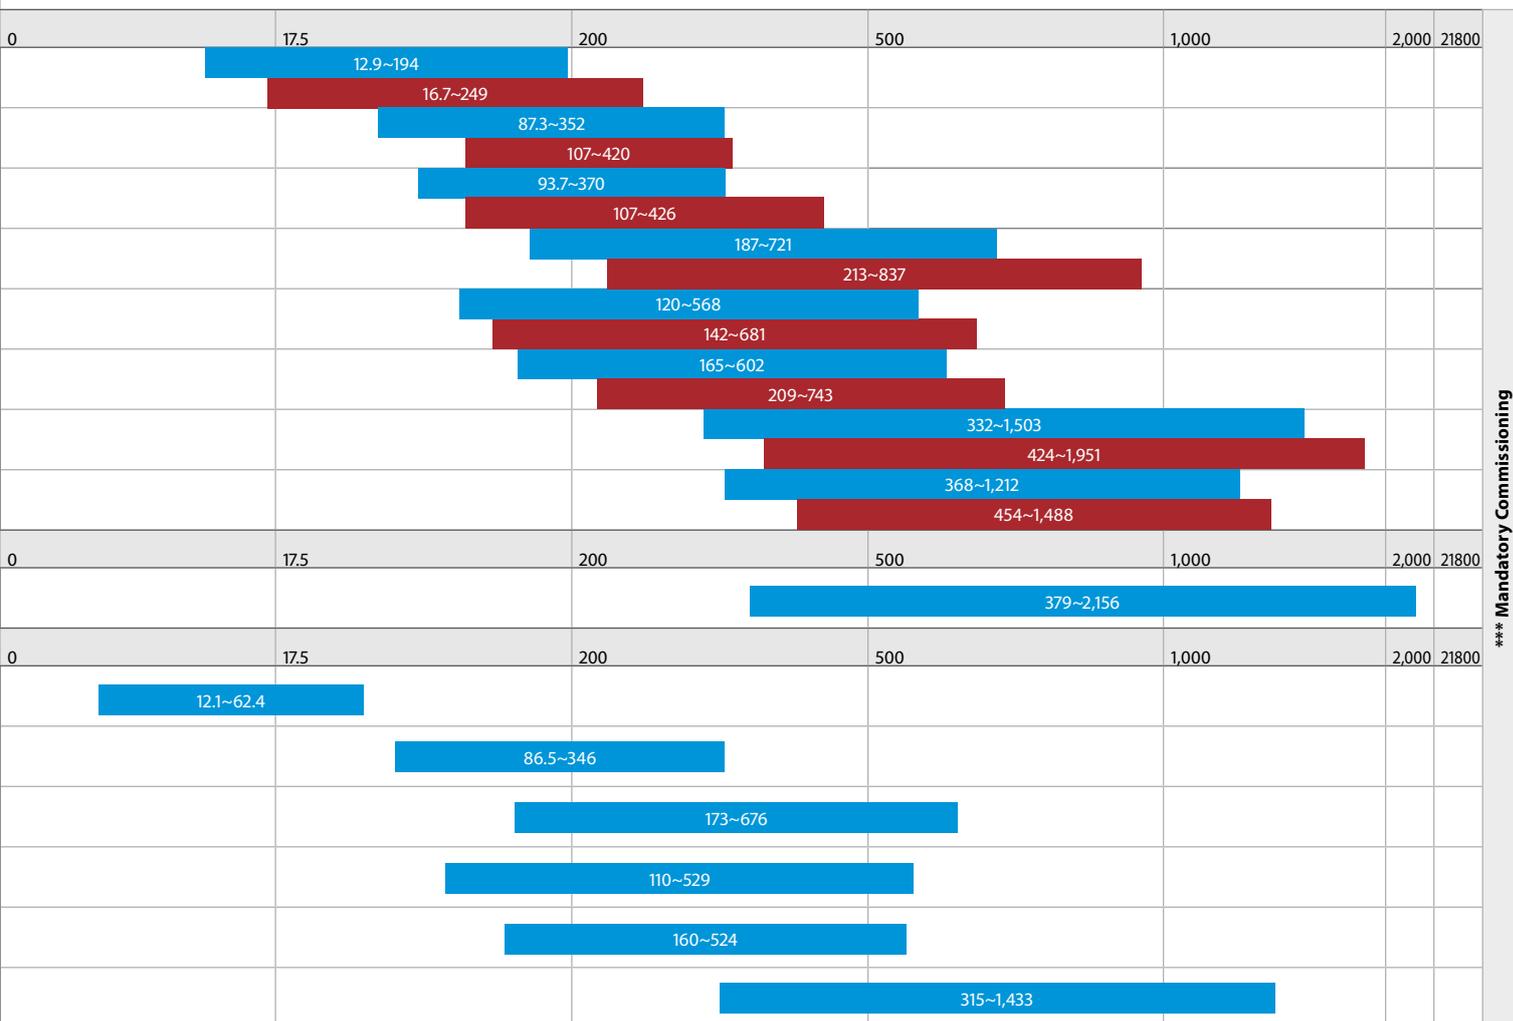

*** Mandatory Commissioning



Daikin air cooled chillers are designed for small to large cooling and heating capacities. A wide range of chillers are available to match every building's air conditioning and process cooling needs. Air cooled chillers are available in different versions:

Mini chillers

Daikin mini chillers are equipped with an inverter swing or scroll compressor allowing a smooth, more reliable and energy-efficient operation with low noise levels and leader-of-class ESEER. Ideal for residential or light commercial applications.

Air cooled scroll chillers

Daikin scroll chillers are designed for small and medium cooling and heating capacities. A wide range to match every building's air conditioning and process cooling needs.

Air cooled screw chillers

Manufactured for large capacities, Daikin screw chillers deliver unparalleled reliability and efficiency, both for comfort and process cooling. Equipped with an inverter they provide high efficiency at part load.

Choose a Daikin air cooled chiller

Wide range of products

Thanks to an extensive product line-up for medium- to large-scale facilities, you can select your optimum model.

Application versatility

Daikin delivers solutions to a wide range for process and comfort climate applications, for all conditions and both cooling or heating requirements.

Energy and cost savings

Utilizing the latest technology, Daikin has achieved industry-leading efficiency and energy-saving operation for outstanding cost saving performance.

Options flexibility

Multiple unique options are available for customizing the chiller to your specific building's needs.



Table of content

Air cooled

Cooling only			
EWAQ-ADVP	28	EWAD-C-SS, EWAD-C-SL	54
EWAQ-ACV3/ EWAQ-ACW1	29	EWAD-C-SR	55
EWAQ-BAWN/BAWP	30	EWAD-C-XS, EWAD-C-XL	56
NEW EWAQ-G-SS	32	EWAD-C-XR	57
NEW EWAQ-G-SR	33	EWAD-C-PS, EWAD-C-PL	58
NEW EWAQ-G-XS	34	EWAD-C-PR	59
NEW EWAQ-G-XR	35	EWAD-CZXS, EWAD-CZXL	60
EWAQ-E-XS, EWAQ-E-XL	36	EWAD-CZXR	61
EWAQ-E-XR	37	EWAD-CFXS, EWAD-CFXL	62
EWAQ-F-SS, EWAQ-F-SL	38	EWAD-CFXR	63
EWAQ-F-SR	39	EWAD-TZ - Argue card	64
EWAQ-F-XS, EWAQ-F-XL	40	EWAD-TZSS, EWAD-TZSR	66
EWAQ-F-XR	41	EWAD-TZXS, EWAD-TZXR	67
EWAQ-GZX	42	EWAD-TZPS, EWAD-TZPR	68
EWAQ-GZXR	43		
EWAD-E-SS	44	Heat pumps	
EWAD-E-SL	45	EWYQ-ADVP	69
EWAD-D-SS	46	EWYQ-ACV3, EWYQ-ACW1	70
EWAD-D-SL	47	EWYQ-BAWN/BAWP	71
EWAD-D-SR	48	SEHVX-AAW/SERHQ-AAW1	72
EWAD-D-SX	49	NEW EWYQ-G-XS	74
EWAD-D-XS	50	NEW EWYQ-G-XR	75
EWAD-D-XR	51	EWYQ-F-XS, EWYQ-F-XL	76
EWAD-D-HS	52	EWYQ-F-XR	77
		EWYD-BZSS	78
		EWYD-BZSL	79

Air cooled mini inverter chiller

- › Inverter technology to ensure low sound values and **leader-of-class ESEER**
- › Wide operating range
- › Easy Plug & Play installation
- › Single phase power supply and low starting currents make the unit ideal **for residential applications**
- › **Built-in hydronic module:** no buffer tank required and a standard pump and main switch are included



Cooling only		EWAQ-ADVP			005	006	007		
Cooling capacity	Nom.				kW	5.28 (1)	6.08 (1)	7.18 (1)	
Power input	Cooling	Nom.				kW	1.94 (1)	2.40 (1)	3.00 (1)
Capacity control	Method		Inverter controlled						
EER						2.72 (1)	2.53 (1)	2.39 (1)	
Dimensions	Unit	Height				mm	805		
		Width				mm	1,190		
		Depth				mm	360		
Weight	Unit				kg	100			
	Operation weight				kg	104			
Water heat exchanger	Type		Braze plate						
	Water flow rate	Cooling	Nom.				l/min	14.9	17.2
Air heat exchanger	Type		Tube type						
Hydraulic components	Expansion vessel	Volume					l	6	
Compressor	Type		Hermetically sealed swing compressor						
	Quantity						1		
Fan	Type		Propeller fan						
	Quantity						1		
Sound power level	Cooling	Nom.					dB(A)	62	63
Sound pressure level	Cooling	Nom.					dB(A)	48	50
Operation range	Water side	Cooling	Min.~Max.				°CDB	5~20	
	Air side	Cooling	Min.~Max.				°CDB	10~43	
Refrigerant	Type / GWP		R-410A / 2,087.5						
	Control		Inverter						
	Circuits	Quantity						1	
Refrigerant charge	Per circuit					kg/TCO,Eq	1.7 / 3.5		
Water circuit	Piping connections diameter					inch	1" MBSP		
Piping connections	Water heat exchanger drain						5/16 SAE flare		
Unit	Maximum running current					A	17.3		
Power supply	Phase/Frequency/Voltage					Hz/V	1~/50/230		

(1) Tamb 35°C - LWE 7°C (Dt: 5°C)

Air cooled mini inverter chiller

- › Inverter technology to ensure low sound values and **leader-of-class ESEER**
- › Wide operating range
- › Built-in hydronic module: no buffer tank required and a standard pump and main switch are included
- › Easy Plug & Play installation
- › Single phase power supply **for residential applications**, three phase power supply model available **for light commercial applications**



Cooling only				EWAQ	009ACV3	010ACV3	011ACV3	009ACW1	011ACW1	013ACW1	
Cooling capacity	Nom.			kW							
				12.2 (1) / 8.6 (2)	13.6 (1) / 9.6 (2)	15.7 (1) / 11.1 (2)	12.9 (1) / 9.1 (2)	15.7 (1) / 11.1 (2)	17.0 (1) / 13.3 (2)		
Power input	Cooling	Nom.		kW							
				2.85 (1) / 2.83 (2)	3.41 (1) / 3.28 (2)	4.13 (1) / 3.90 (2)	3.08 (1) / 3.05 (2)	4.13 (1) / 3.90 (2)	5.52 (1) / 5.18 (2)		
Capacity control	Method			Inverter controlled							
EER				4.27 (1) / 3.05 (2)	4.00 (1) / 2.93 (2)	3.79 (1) / 2.85 (2)	4.19 (1) / 2.99 (2)	3.79 (1) / 2.85 (2)	3.08 (1) / 2.57 (2)		
ESEER				4.31	4.30	4.33	4.43	4.44	4.36		
Dimensions	Unit	Height		mm							
		Width		1,435							
		Depth		1,418							
Weight	Unit			mm							
				382							
				180							
Water heat exchanger	Type			Brazed plate							
		Quantity		1							
		Water volume		l							
Air heat exchanger	Type			Hi-XSS							
		Water flow rate	Cooling	Nom.		24.7	27.6	31.9	26.1	31.9	38.2
						l/min					
Hydraulic components	Expansion vessel	Volume		l							
Compressor	Type			Hermetically sealed scroll compressor							
		Quantity		1							
				Propeller fan							
Fan	Type			2							
		Quantity		2							
		Air flow rate	Cooling	Nom.		96	100	97	-		
Fan motor	Speed	Cooling	Nom.		rpm						
					780						
		Steps		8							
Sound power level	Cooling	Nom.		dBA							
				64							
				66							
Sound pressure level	Cooling	Nom.		dBA							
				51							
				52							
Operation range	Water side	Cooling	Min.-Max.		°CDB						
					5~22						
					10~46						
Refrigerant	Type / GWP			R-410A / 2,087.5							
		Control		Electronic expansion valve							
		Circuits	Quantity		1						
Refrigerant charge	Per circuit			kg/TCO _{Eq}							
Water circuit	Piping connections diameter			inch							
				G 5/4" (female)							
				5/4"							
Power supply	Phase/Frequency/Voltage			Hz/V							
				1~/50/230					3N~/50/400		

(1) Underfloor program: cooling Ta 35°C - LWE 18°C (Dt: 5°C) (2) Fan coil program: cooling Ta 35°C - LWE 7°C (Dt: 5°C)


Air cooled scroll inverter chiller

- › High efficiency with **leader-of-class ESEER**
- › Minimal starting currents and short payback times
- › No buffertank required for standard applications
- › **Large operation range** (ambient temperature up to 43°C)
- › A modbus gateway (RTD-W) can be installed per unit in order allow the control and monitoring by a Daikin controller or a third-party BMS, which will increase further the efficiency of the system
- › All systems that are connected with RTD-W can be controlled and **monitored centrally** with the master/slave control kit: the sequencing controller EKCC-W



Cooling only		EWAQ-BAWN/BAWP			016		021		025		032		040		050		064			
Cooling capacity	Nom.	kW			17.4 (1) / 16.6 (2)		21.7 (1) / 20.7 (2)		25.8 (1) / 24.7 (2)		32.3 (1) / 30.9 (2)		43.4 (1) / 41.5 (2)		51.8 (1) / 49.7 (2)		64.5 (1) / 62.3 (2)			
Power input	Cooling	kW			5.60 (1) / 5.80 (2)		7.25 (1) / 7.59 (2)		9.29 (1) / 9.74 (2)		13.0 (1) / 13.5 (2)		14.7 (1) / 15.4 (2)		18.8 (1) / 19.7 (2)		26.4 (1) / 27.4 (2)			
Capacity control	Method	Inverter controlled																		
	Minimum capacity	%			25															
EER					3.11 (1) / 2.86 (2)		2.99 (1) / 2.73 (2)		2.78 (1) / 2.54 (2)		2.48 (1) / 2.29 (2)		2.95 (1) / 2.69 (2)		2.76 (1) / 2.52 (2)		2.44 (1) / 2.27 (2)			
ESEER					4.33 (1) / 4.21 (2)		4.08 (1) / 4.18 (2)		3.85 (1) / 4.04 (2)		3.39 (1) / 3.62 (2)		4.19 (1) / 4.24 (2)		3.96 (1) / 4.12 (2)		3.64 (1) / 3.78 (2)			
Dimensions	Unit	Height	mm			1,684														
		Width	mm			1,371			1,684			2,358			2,980					
		Depth	mm			774			780			780			780					
Weight	Unit	kg			264		317		397		571		730		738		738			
	Operation weight	kg			267		320		401		577		738		738		738			
Water heat exchanger	Type	Braze plate																		
	Water volume	l			1.9			2.9			3.8			5.7						
	Water flow rate	Cooling	Nom.		l/min		50		62		74		93		124		148		185	
Water pressure drop	Cooling	Total		kPa		20		30		42		30		42		30				
		Type	Hi-XSS																	
Compressor	Type	Hermetically sealed scroll compressor																		
	Quantity				1		2		3		4		6							
Fan	Type	Axial																		
	Quantity				1			2			4									
Air flow rate	Cooling	Nom.		m³/min		171		185		233		370		466						
		Sound power level	Cooling	Nom.		dBA		78		80		81		83						
Operation range	Water side	Cooling	Min.~Max.		°CDB		-10~20													
			Air side	Cooling	Min.~Max.		°CDB		-5~43											
Refrigerant	Type / GWP	R-410A / 2,087.5																		
	Control	Electronic expansion valve																		
	Circuits	Quantity			1															
Refrigerant charge	Per circuit	kg/TCO ₂ Eq			7.6 / 15.9			9.6 / 20.0			15.2 / 31.7			19.2 / 40.1						
Water circuit	Piping connections diameter	inch			1-1/4" (female)						2" (female)									
	Piping	inch			1-1/4"						1-1/2"									
Unit	Maximum starting current	A			0		77.7		78.7		88.7		99.8		101.9		120.7			
	Maximum running current	A			22.2		25.3		26.4		35.2		47.4		49.6		67.2			
Power supply	Phase/Frequency/Voltage	Hz/V			3N~/50/400															

(1) EWAQ-BAWN: Version without pump (2) EWAQ-BAWP: Version with pump

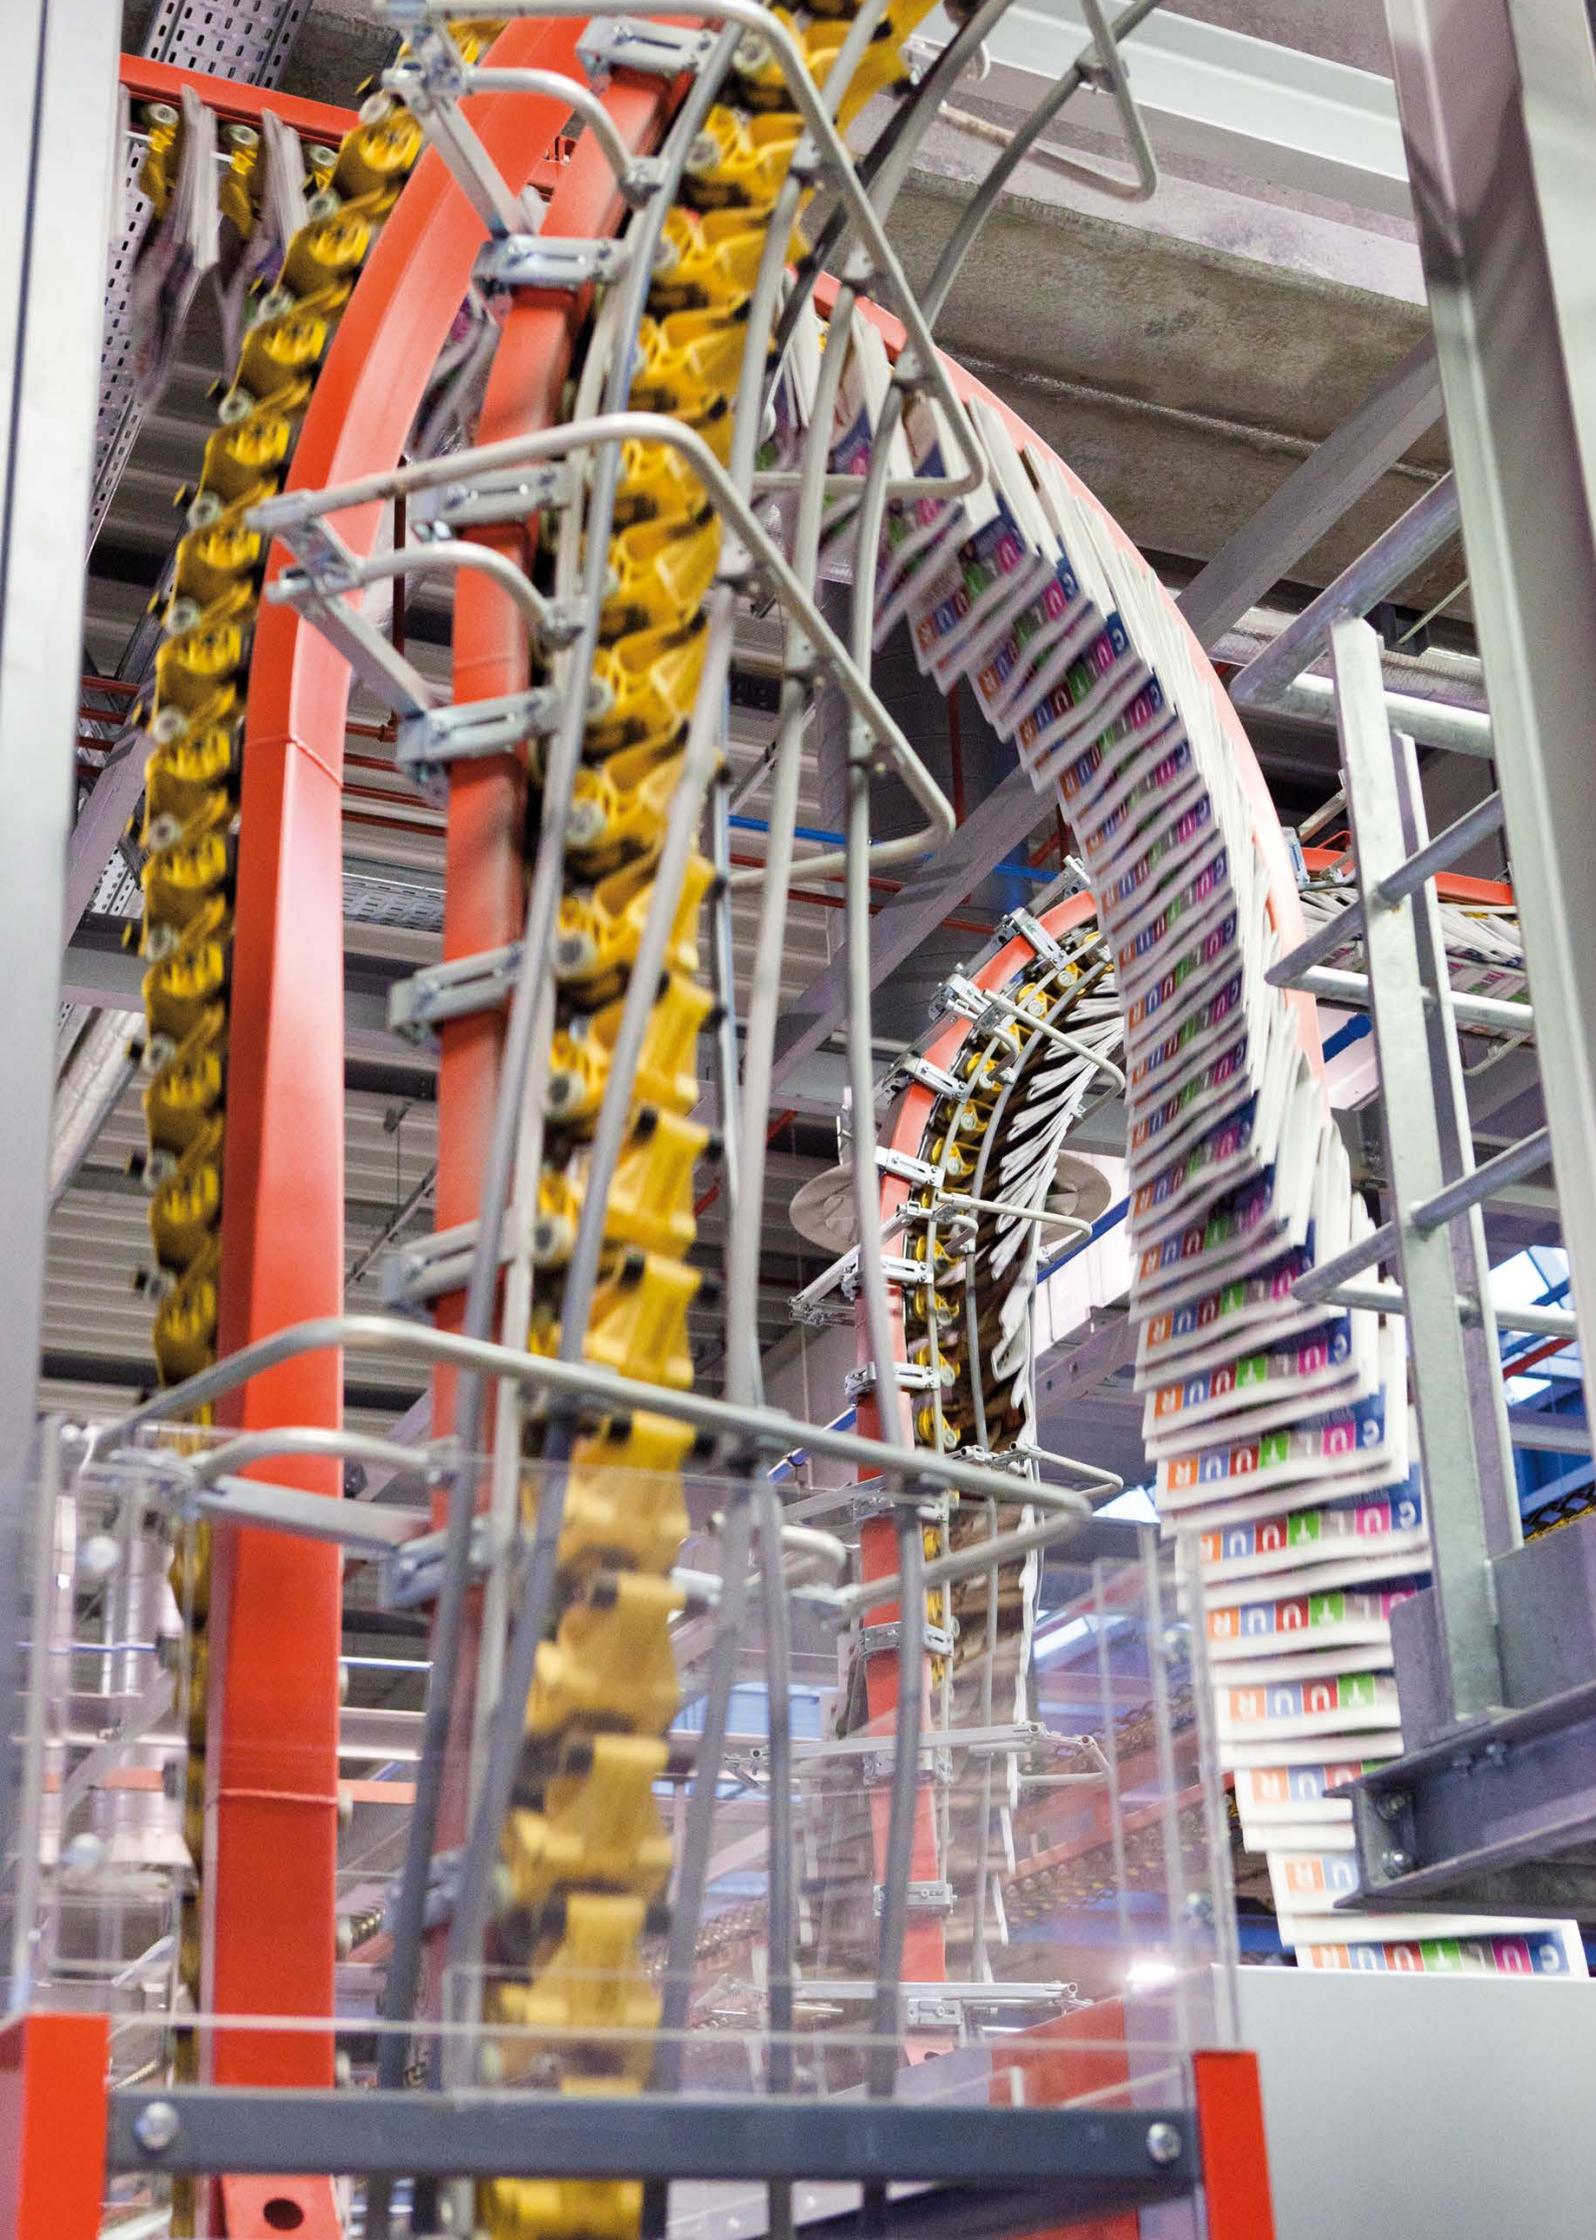

Air cooled multi-scroll chiller

Standard efficiency

Standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Compact design to allow easy indoor installation or retrofit operations
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact
- › Partial and total heat recovery option available
- › Stainless steel plate heat exchanger

Cooling only		EWAQ-G-SS		075	085	100	110	120	140	155	
Cooling capacity	Nom.		kW	74.7	84.2	96.7	107	117	139	154	
Power input	Cooling	Nom.	kW	27.7	31.2	35.0	39.5	43.4	51.1	57.2	
Capacity control	Method			Step							
	Minimum capacity		%	50	44	50	44	50	43	50	
EER				2.70		2.76	2.70		2.73	2.70	
ESEER				4.11	4.23	4.04	4.12	3.91	4.20	4.06	
Dimensions	Unit	Height	mm	1,800							
		Width	mm	1,195							
		Depth	mm	2,140	2,680			3,200			
Weight	Unit		kg	681	792	923	953	982	1,037	1,066	
	Operation weight		kg	692	802	934	963	993	1,054	1,085	
Water heat exchanger	Type			Braze plate							
	Water flow rate	Cooling	Nom.	l/s	3.6	4.0	4.6	5.1	5.6	6.7	7.4
	Water pressure drop	Cooling	Nom.	kPa	15.5	27.3	36.9	31.6	36.0	27.5	25.8
	Water volume			l	5.60	4.90		5.60		8.10	9.40
Air heat exchanger	Type			Microchannel							
Compressor	Type			Scroll compressor							
	Quantity			2							
Fan	Type			Direct propeller							
	Quantity			4			6		8		
	Air flow rate	Nom.	l/s	6,017	6,444	9,029			12,008		
	Speed		rpm	1,360							
Sound power level	Cooling	Nom.	dBA	83	85	87	89				
Sound pressure level	Cooling	Nom.	dBA	66	68	69	71				
Operation range	Air side	Cooling	Min.~Max.	°CDB	-10~42						
	Water side	Cooling	Min.~Max.	°CDB	-10~15						
Refrigerant	Type / GWP			R-410A / 2,087.5							
	Circuits	Quantity		1							
Refrigerant charge	Per circuit		kg/TCO,Eq	8.0 / 16.7			10.0 / 20.9		12.0 / 25.1		
Piping connections	Evaporator water inlet/outlet (OD)			2" 1/2							
Unit	Starting current	Max	A	208	259	266	313	321	361	374	
	Running current	Cooling	Nom.	A	54	58	62	70	79	89	102
		Max	A	64	69	77	84	92	108	122	
	Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400						

Air cooled multi-scroll chiller

Standard efficiency

Reduced sound



EWAQ-G-SS/SR

Cooling only					EWAQ-G-SR	075	085	100	110	120	140	155
Cooling capacity	Nom.			kW	69.3	78.9	91.0	99.7	109	130	143	
Power input	Cooling	Nom.		kW	29.4	33.1	36.8	42.0	46.3	54.0	61.2	
Capacity control	Method				Step							
	Minimum capacity			%	50	44	50	44	50	43	50	
EER					2.36	2.38	2.47	2.38	2.35	2.42	2.34	
ESEER					3.94	4.12	3.94	4.02	3.74	4.12	3.88	
Dimensions	Unit	Height		mm	1,800							
		Width		mm	1,195							
		Depth		mm	2,140		2,680			3,200		
Weight	Unit			kg	711	822	953	983	1,012	1,067	1,096	
	Operation weight			kg	722	832	963	993	1,023	1,084	1,115	
Water heat exchanger	Type				Braze plate							
	Water flow rate	Cooling	Nom.	l/s	3.3	3.8	4.4	4.8	5.2	6.2	6.9	
	Water pressure drop	Cooling	Nom.	kPa	13.3	24.0	32.6	27.6	31.1	24.1	22.2	
	Water volume			l	5.58	4.86		5.60		8.10	9.36	
Air heat exchanger	Type				Microchannel							
Compressor	Type				Scroll compressor							
	Quantity				2							
Fan	Type				Direct propeller							
	Quantity				4				8			
	Air flow rate	Nom.		l/s	4,523	5,046		6,787		9,023		
	Speed			rpm	1,108							
Sound power level	Cooling	Nom.		dB(A)	79	82	84		86			
Sound pressure level	Cooling	Nom.		dB(A)	62	65	66		68			
Operation range	Air side	Cooling	Min.~Max.	°CDB	-10~42							
	Water side	Cooling	Min.~Max.	°CDB	-10~15							
Refrigerant	Type / GWP				R-410A / 2,087.5							
	Circuits	Quantity			1							
Refrigerant charge	Per circuit			kg/TCO,Eq	8.0 / 16.7			10.0 / 20.9			12.0 / 25.1	
Piping connections	Evaporator water inlet/outlet (OD)				2" 1/2							
Unit	Starting current	Max		A	207	258	266	313	320	360	374	
	Running current	Cooling	Nom.	A	57	61	65	74	84	93	109	
		Max		A	63	69	76	84	91	107	121	
	Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400							

Air cooled multi-scroll chiller

High efficiency

Standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Compact design to allow easy indoor installation or retrofit operations
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact
- › Partial and total heat recovery option available
- › Stainless steel plate heat exchanger

Cooling only		EWAQ-G-XS		080	090	105	115	130	150			
Cooling capacity	Nom.		kW	79.8	90.3	105	117	131	149			
Power input	Cooling	Nom.	kW	25.8	29.0	33.8	37.7	42.3	48.1			
Capacity control	Method	Step										
	Minimum capacity		%	50	44	50	44	50	43			
EER				3.10	3.11	3.12		3.10				
ESEER				4.20	4.30	4.28	4.34	4.22	4.36			
Dimensions	Unit	Height	mm	1,800				1,820				
			Width	1,195								
			Depth	2,680		3,200		3,800				
Weight	Unit		kg	734	850	991	1,020	1,086	1,123			
		Operation weight		kg	744	860	1,007	1,035	1,102	1,144		
Water heat exchanger	Type	Braze plate										
		Water flow rate	Cooling	Nom.	l/s	3.8	4.3	5.0	5.6	6.3	7.1	
		Water pressure drop	Cooling	Nom.	kPa	25.7	32.7	20.3	19.9	25.4	20.6	
		Water volume		l	5.58	4.86		5.60	8.10			
Air heat exchanger	Type	Microchannel										
		Scroll compressor										
Compressor	Quantity	2										
		Direct propeller										
				6		8		10				
Fan	Type	Quantity	Air flow rate	Nom.	l/s	9,029	9,498	12,008	15,046			
						Speed	rpm				1,360	
Sound power level	Cooling	Nom.	dBa	84	85	87		89				
Sound pressure level	Cooling	Nom.	dBa	66	68	69		71				
Operation range	Air side	Cooling	Min.-Max.	°CDB	-10~-45							
	Water side	Cooling	Min.-Max.	°CDB	-10~-15							
Refrigerant	Type / GWP	R-410A / 2,087.5										
	Circuits	Quantity	1									
Refrigerant charge	Per circuit		kg/TCO,Eq	8.0 / 16.7			10.0 / 20.9		12.0 / 25.1			
Piping connections	Evaporator water inlet/outlet (OD)			2" 1/2								
Unit	Starting current	Max	A	210	261	268	315	324	362			
			Running current	Cooling	Nom.	A	52	56	61	69	76	87
				Max	A	65	71	78	86	96	109	
Power supply	Phase/Frequency/Voltage			Hz/V								
	3~/50/400											

Air cooled multi-scroll chiller

High efficiency

Reduced sound



Cooling only					EWAQ-G-XR	080	090	105	130	115	150
Cooling capacity	Nom.			kW	76.0	86.0	100	125	110	141	
Power input	Cooling	Nom.		kW	26.4	29.9	34.7	43.3	39.0	49.8	
Capacity control	Method				Step						
	Minimum capacity			%	50	44	50	44	43		
EER					2.88	2.89	2.88	2.83			
ESEER					4.18	4.29	4.27	4.21	4.31	4.33	
Dimensions	Unit	Height		mm	1,800						
		Width		mm	1,195						
		Depth		mm	2,680	3,200	3,800	3,200	3,800		
Weight	Unit			kg	764	880	1,021	1,116	1,050	1,153	
	Operation weight			kg	774	890	1,037	1,132	1,065	1,174	
Water heat exchanger	Type				Braze plate						
	Water flow rate	Cooling	Nom.	l/s	3.6	4.1	4.8	6.0	5.3	6.7	
	Water pressure drop	Cooling	Nom.	kPa	23.3	29.6	18.4	23.0	17.8	18.4	
	Water volume			l	5.58	4.86	5.60	8.10			
Air heat exchanger	Type				Microchannel						
Compressor	Type				Scroll compressor						
	Quantity				2						
Fan	Type				Direct propeller						
	Quantity				6	8	10	8	10		
	Air flow rate	Nom.		l/s	6,787	7,356	9,023	11,309	9,023	11,309	
	Speed			rpm	1,108						
Sound power level	Cooling	Nom.		dB(A)	80	82	84	86			
Sound pressure level	Cooling	Nom.		dB(A)	62	65	66	67	68	67	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-10~45						
	Water side	Cooling	Min.~Max.	°CDB	-10~15						
Refrigerant	Type / GWP				R-410A / 2,087.5						
	Circuits	Quantity			1						
Refrigerant charge	Per circuit			kg/TCO,Eq	8.0 / 16.7		10.0 / 20.9		12.0 / 25.1		
Piping connections	Evaporator water inlet/outlet (OD)				2" 1/2						
Unit	Starting current	Max		A	209	260	267	324	314	362	
	Running current	Cooling	Nom.	A	54	58	63	78	71	90	
		Max		A	65	71	78	95	85	109	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						

Air cooled multi-scroll chiller

High efficiency

Standard/low sound

- › Reliable and efficient scroll compressors with high EER values
- › A series of advantages thanks to the use of large-capacity scroll compressors: increased competitiveness, reduced weight, clearances around the unit
- › **Reduced footprint thanks to the V-shaped frame**
- › Large operation range: ambient temperatures up to 52°C and down to -18°C
- › Ideal solution for **a broad range of comfort and process applications**
- › The unit can be equipped with a hydraulic module optimizing installation time, space and cost
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAQ-E-XS/XL		180	200	230	260	320	340
Cooling capacity	Nom.		kW	178	200	226	263	315	334
Power input	Cooling	Nom.	kW	58.0	65.4	73.8	86.2	103	110
Capacity control	Method	Step							
	Minimum capacity		%	50.0	43.0	50.0	33.0	27.0	33.0
EER				3.06		4.18		3.05	
ESEER				4.02	4.11	3.91	4.18	4.17	4.14
Dimensions	Unit	Height	mm	2,271				2,447	
		Width	mm	1,224					
		Depth	mm	4,413		5,313		6,213	
Weight (XS)	Unit		kg	1,722	1,807	1,871	2,173	2,304	2,492
	Operation weight		kg	1,734	1,819	1,885	2,188	2,318	2,507
Weight (XL)	Unit		kg	1,876	1,965	2,032	2,370	2,507	2,705
	Operation weight		kg	1,889	1,978	2,047	2,385	2,522	2,719
Water heat exchanger	Type	Plate heat exchanger							
	Water volume		l	12			14		
	Water flow rate	Cooling	Nom.	l/s	8.5	9.6	10.8	12.6	15.1
	Water pressure drop	Cooling	Nom.	kPa	27	34	35	47	54
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler							
Compressor	Type	Scroll compressor							
	Quantity	2				3			
Fan	Type	Direct propeller							
	Quantity	4		5		6			
	Air flow rate	Nom.	l/s	21,845	21,148	26,874	25,884	32,953	32,065
	Speed		rpm	900					
Sound power level (XS)	Cooling	Nom.	dBA	93	94	96	95	96	97
Sound power level (XL)	Cooling	Nom.	dBA	91	92	93	92	93	94
Sound pressure level (XS)	Cooling	Nom.	dBA	75		76			77
Sound pressure level (XL)	Cooling	Nom.	dBA		73				74
Operation range	Water side	Cooling	Min.~Max.	-13~-18					
	Air side	Cooling	Min.~Max.	-18~-52					
Refrigerant	Type / GWP	R-410A / 2,087.5							
	Circuits	Quantity	1						
Refrigerant charge	Per circuit		kg/TCO,Eq	28.0 / 58.5	31.0 / 64.7	34.0 / 71.0	40.0 / 83.5	43.0 / 89.8	53.0 / 110.6
Piping connections	Evaporator water inlet/outlet (OD)	3"							
	Unit	Maximum starting current	A	384	482	500	447	563	577
	Nominal running current (RLA)	Cooling	A	103	115	129	151	179	190
	Maximum running current	A	133	147	165	195	227	241	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400					

Air cooled multi-scroll chiller

High efficiency
Reduced sound



Cooling only		EWAQ-E-XR		170	190	220	260	300	320	
Cooling capacity	Nom.		kW	172	190	219	254	302	310	
Power input	Cooling	Nom.	kW	56.5	63.6	71.8	85.4	102	107	
Capacity control	Method	Step								
	Minimum capacity		%	50.0	43.0	50.0	33.0	27.0	33.0	
EER				3.05	2.98	3.05	2.97	2.96	2.89	
ESEER				4.45	4.57	4.33	4.65	4.62	4.50	
Dimensions	Unit	Height	mm	2,271						
		Width	mm	1,224						
		Depth	mm	4,413		5,313		6,213		
Weight	Unit		kg	1,970	2,064	2,134	2,489	2,632	2,840	
	Operation weight		kg	1,982	2,076	2,148	2,503	2,647	2,855	
Water heat exchanger	Type	Plate heat exchanger								
	Water volume		l	12		14				
	Water flow rate	Cooling	Nom.	l/s	8.2	9.1	10.5	12.1	14.5	14.8
	Water pressure drop	Cooling	Nom.	kPa	26	39	33	44	43	52
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler								
Compressor	Type	Scroll compressor								
	Quantity			2		3		3		
Fan	Type	Direct propeller								
	Quantity			4		5		6		
	Air flow rate	Nom.	l/s	16,743	18,405	20,618	20,056	25,243	28,009	
	Speed		rpm	705	784	705	705	784	784	
Sound power level	Cooling	Nom.	dB(A)	85	86	87	86	88	89	
Sound pressure level	Cooling	Nom.	dB(A)	66	67	68	67	68	69	
Operation range	Water side	Cooling	Min.~Max.	°CDB	-13~-18					
	Air side	Cooling	Min.~Max.	°CDB	-18~-52					
Refrigerant	Type / GWP	R-410A / 2,087.5								
	Circuits	Quantity		1						
Refrigerant charge	Per circuit		kg/TCO ₂ Eq	28.0 / 58.5	31.0 / 64.7	27.0 / 56.4	35.0 / 73.1	43.0 / 89.8	53.0 / 110.6	
Piping connections	Evaporator water inlet/outlet (OD)	3"								
Unit	Maximum starting current		A	379	482	493	440	554	577	
	Nominal running current (RLA)	Cooling	A	101	117	127	151	179	193	
	Maximum running current		A	127	147	158	188	219	241	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400						

Air cooled multi-scroll chiller

Standard efficiency

Standard/low sound

- › Reliable and efficient scroll compressors with high EER values
- › A series of advantages thanks to the use of large-capacity scroll compressors: increased competitiveness, reduced weight, clearances around the unit
- › **2 truly independent refrigerant circuits**
- › Reduced footprint thanks to the **V-shaped frame** (EWAQ210-350/400F-SS/SL & EWAQ200-330/370F-SR)
- › Large operation range: ambient temperatures up to 52°C and down to -18°C
- › The unit can be equipped with a hydraulic module optimizing installation time, space and cost
- › Ideal solution for a broad range of comfort and process applications
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAQ-F-SS/SL											210	230	250	280	320	350	360	400	410	480	550	610			
Cooling capacity	Nom.	kW		206	224	247	283	313	359			423	407	480	551	609											
Power input	Cooling	kW		73.3	84.9	93.6	109	122	141			154		187	207	229											
Capacity control	Method												Step														
	Minimum capacity	%		25.0	22.0	25.0	23.0	25.0	21.0			25.0		17.0	14.0	17.0											
EER			2.81		2.64		2.60		2.58		2.55		2.75		2.64		2.57		2.67		2.66						
ESEER			3.79		3.77		3.81		3.74		3.78		3.73		4.02		3.74		4.04		4.13		4.05		4.08		
Dimensions	Unit	Height	mm		2,271						2,221		2,447		2,397		2,221										
		Width	mm		1,224						2,258		1,224		2,258												
		Depth	mm		4,413			5,313			6,213		3,210		6,213		3,210		4,110		5,010						
Weight (SS)	Unit	kg		2,058		2,130		2,202		2,284		2,409		2,509		2,659		2,759		2,990		3,336		3,558			
	Operation weight	kg		2,070		2,142		2,216		2,298		2,424		2,524		2,699		2,799		3,036		3,382		3,604			
Weight (SL)	Unit	kg		2,297		2,373		2,449		2,535		2,666		2,766		2,968		3,068		3,315		3,679		3,912			
	Operation weight	kg		2,309		2,385		2,463		2,549		2,681		2,781		3,008		3,108		3,362		3,725		3,958			
Water heat exchanger	Type												Plate heat exchanger														
	Water volume	l		12			14			40			46														
	Water flow rate	Cooling	Nom.		l/s		9.9	10.7	11.8	13.6	15.0	17.2		20.3	19.5	23.0	26.4	29.2									
	Water pressure drop	Cooling	Nom.		kPa		37	43	53	56	69	30		27	32	35	46	56									
Air heat exchanger	Type												High efficiency fin and tube type with integral subcooler														
Compressor	Type												Scroll compressor														
	Quantity												4							6							
Fan	Type												Direct propeller														
	Quantity												4			5			6			8			10		
	Air flow rate	Nom.		l/s		21,845		21,148		27,306		26,435		32,767		36,265		32,513		43,690		54,612		52,870			
	Speed	rpm		900						980		900															
Sound power level (SS)	Cooling	Nom.		dBA		93	94	95			97						99										
Sound power level (SL)	Cooling	Nom.		dBA		91	92		93			94			95		96										
Sound pressure level (SS)	Cooling	Nom.		dBA		75			76			77		78			79										
Sound pressure level (SL)	Cooling	Nom.		dBA		73			74			75		74		75		76									
Operation range	Water side	Cooling	Min.~Max.		°CDB		-13~-18																				
	Air side	Cooling	Min.~Max.		°CDB		-18~-52																				
Refrigerant	Type / GWP												R-410A / 2,087.5														
	Circuits	Quantity		2																							
Refrigerant charge	Per circuit	kg/TCO,Eq		14.0 / 29.2		15.5 / 32.4		16.5 / 34.4		20.0 / 41.8		23.0 / 48.0		27.0 / 56.4		28.0 / 58.5		32.5 / 67.8		40.0 / 83.5							
Piping connections	Evaporator water inlet/outlet (OD)												3"														
	Unit	Maximum starting current	A		349	404	419	476	505	621			649		634		768		810								
	Nominal running current (RLA)	Cooling	A		130	147	161	187	208	242			259		262		322		356		391						
	Maximum running current	A		160	176	191	225	254	286			314		383		433		474									
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																							

Air cooled multi-scroll chiller

Standard efficiency

Reduced sound



EWAQ-F-SS/SL/SR

MicroTech III

Cooling only				EWAQ-F-SR	200	220	240	270	300	330	340	370	380	460	530	580
Cooling capacity	Nom.			kW	198	214	235	270	298	341		383		456	527	580
Power input	Cooling	Nom.		kW	73.4	86.0	95.6	110	125	144		159		191	208	233
Capacity control	Method				Step											
	Minimum capacity			%	25.0	22.0	25.0	23.0	25.0	21.0		25.0		17.0	14.0	17.0
EER					2.70	2.49	2.46	2.45	2.38	2.37		2.41		2.39	2.53	2.49
ESEER					4.27	4.20	4.13	4.16	4.08	4.10	4.27	4.03	4.16	4.53	4.49	4.43
Dimensions	Unit	Height		mm	2,271					2,221		2,447	2,397		2,221	
		Width		mm	1,224					2,258		1,224	2,258			
		Depth		mm	4,413			5,313		6,213	3,210	6,213	3,210	4,110	5,010	
Weight	Unit			kg	2,412	2,491		2,571	2,661	2,799	2,899	3,116	3,216	3,481	3,863	4,108
	Operation weight			kg	2,424		2,504	2,585	2,676	2,814	2,914	3,156	3,256	3,527	3,909	4,154
Water heat exchanger	Type				Plate heat exchanger											
	Water volume			l	12				14				40		46	
	Water flow rate	Cooling	Nom.	l/s	9.5	10.2	11.3	13.0	14.3	16.3		18.3		21.8	25.2	27.8
	Water pressure drop	Cooling	Nom.	kPa	34	40	48	51	63	27		29		31	42	51
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler											
Compressor	Type				Scroll compressor											
	Quantity				4						6					
Fan	Type				Direct propeller											
	Quantity				4			5		6			8		10	
	Air flow rate		Nom.	l/s	16,743		16,285	20,929	20,356	25,115		24,922	33,487	41,858	40,713	
	Speed			rpm	705											
Sound power level	Cooling		Nom.	dBA	85	86	87		89			90	89	91	92	
Sound pressure level	Cooling		Nom.	dBA	66	67	68		69	70	71	70	71	72		
Operation range	Water side	Cooling	Min.~Max.	°CDB	-13~-18											
	Air side	Cooling	Min.~Max.	°CDB	-18~-52											
Refrigerant	Type / GWP				R-410A / 2,087.5											
	Circuits		Quantity		2											
Refrigerant charge	Per circuit			kg/TCO,Eq	16.0 / 33.4		18.0 / 37.6	19.0 / 39.7	20.0 / 41.8	23.0 / 48.0		27.0 / 56.4	28.0 / 58.5	32.5 / 67.8	40.0 / 83.5	
Piping connections	Evaporator water inlet/outlet (OD)				3"											
Unit	Maximum starting current			A	344	398	414	469	498	613		641	623	754	796	
	Nominal running current (RLA)		Cooling	A	129	149	164	189	214	247		270	328	359	398	
	Maximum running current			A	155	170	186	218	247	277		305	372	419	460	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

Air cooled multi-scroll chiller

High efficiency

Standard/low sound

- › Reliable and efficient scroll compressors with **high EER values**
- › A series of advantages thanks to the use of large-capacity scroll compressors: increased competitiveness, reduced weight, clearances around the unit
- › **2 truly independent refrigerant circuits**
- › Reduced footprint thanks to the **V-shaped frame** (EWAQ170-310/350F-XS/XL & EWAQ170-300/330F-XR)
- › Large operation range: ambient temperatures up to 52°C and down to -18°C
- › The unit can be equipped with a hydraulic module optimizing installation time, space and cost
- › Ideal solution for a broad range of comfort and process applications
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAQ-F-XS/XL		170	200	220	250	310	320	350	360	400	430	450	520	610	680	
Cooling capacity	Nom.	kW		170	194	220	244	316		356		403	428	457	528	607	672	
Power input	Cooling	Nom.	kW	54.8	62.2	70.6	78.3	102		115		130	137	146	170	198	219	
Capacity control	Method	Step																
	Minimum capacity	%		25.0	21.0	25.0	22.0	23.0		25.0		21.0	20.0	25.0	17.0	14.0	17.0	
EER				3.11	3.13	3.12		4.04		3.09		3.10	3.12		3.10	3.07		
ESEER				3.90	4.10	3.95	4.08	4.04		4.30	4.05	4.33	4.24	4.27	4.23	4.35	4.30	4.23
Dimensions	Unit	Height	mm	2,271				2,221	2,271	2,221								
		Width	mm	1,224				2,258	1,224	2,258								
		Depth	mm	4,413		5,313		6,213	3,210	6,213	3,210	4,110		5,010		5,910		
Weight (XS)	Unit	kg	1,688	1,958	2,210	2,339	2,500	2,600	2,632	2,732	2,744	2,845	2,861	3,569	3,667	4,054		
	Operation weight	kg	1,700	1,973	2,225	2,353	2,514		2,672	2,772	2,784	2,891	2,907	3,615	3,727	4,115		
Weight (XL)	Unit	kg	1,909	2,193	2,457	2,592	2,761	2,861	2,900	3,000	3,017	3,124	3,141	3,923	4,026	4,434		
	Operation weight	kg	1,921	2,207	2,472	2,607	2,776	2,876	2,940	3,040	3,057	3,170	3,187	3,970	4,087	4,494		
Water heat exchanger	Type	Plate heat exchanger																
	Water volume	l	12	14				40				46		60				
	Water flow rate	Cooling	Nom.	l/s	8.2	9.3	10.5	11.7	15.1		17.0		19.3	20.5	21.8	25.3	29.0	32.2
	Water pressure drop	Cooling	Nom.	kPa	25	27	34	42	22		23		31	29	30	41	44	55
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler																
Compressor	Type	Scroll compressor																
	Quantity	4												6				
Fan	Type	Direct propeller																
	Quantity	4				5				6				8		10		12
	Air flow rate	Nom.	l/s	21,845	21,148	26,874	25,204	31,722		30,245		42,296	40,326		50,408		60,489	
	Speed	rpm	900															
Sound power level (XS)	Cooling	Nom.	dB(A)	91	93	94	95	96				97	98		99	100		
Sound power level (XL)	Cooling	Nom.	dB(A)	90	91	92		93				95		96		97		
Sound pressure level (XS)	Cooling	Nom.	dB(A)	72	74	75	76	77	76	77	78		79	78	79			
Sound pressure level (XL)	Cooling	Nom.	dB(A)	71	73				74				75		76			
Operation range	Water side	Cooling	Min.~Max.	-13~-18														
	Air side	Cooling	Min.~Max.	-18~-52														
Refrigerant	Type / GWP	R-410A / 2,087.5																
	Circuits	Quantity	2															
Refrigerant charge	Per circuit	kg/TCO,Eq	14.0/29.2	15.5/32.4	16.5/34.4	20.0/41.8	26.0/54.3				31.0/64.7		37.0/77.2	36.0/75.2	41.5/86.6			
Piping connections	Evaporator water inlet/outlet (OD)	3"																
Unit	Maximum starting current	A	281	338	353	408	480				509	629	643	657	642	768	818	
	Nominal running current (RLA)	Cooling	A	110	117	128	141	181		202		229	240	254	300	343	379	
	Maximum running current	A	138	149	164	180	229		258		294	308	322	391	433	482		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400															

Air cooled multi-scroll chiller

High efficiency
Reduced sound



EWAQ-F-XS/XL/XR

MicroTech III

Cooling only		EWAQ-F-XR		170	190	210	240	300	310	330	340	390	410	430	500	580	650				
Cooling capacity	Nom.	kW		165	188	211	236	304		340		385	407	433	502	579	645				
Power input	Cooling	kW		53.0	61.2	68.7	77.3	101		117		128	136	146	170	200	219				
Capacity control	Method	Step																			
	Minimum capacity	%		25.0	21.0	25.0	22.0	23.0		25.0		21.0	20.0	25.0	17.0	14.0	17.0				
EER				3.12	3.07	3.08	3.05	3.00		2.92		3.01	2.99	2.96		2.90	2.95				
ESEER				4.53	4.64	4.51	4.60	4.53	4.68	4.44	4.63	4.68	4.64	4.54	4.82	4.69	4.65				
Dimensions	Unit	Height	mm		2,271				2,221	2,271	2,221										
		Width	mm		1,224				2,258	1,224	2,258										
		Depth	mm		4,413	5,313			6,213	3,210	6,213	3,210	4,110		5,010		5,910				
Weight	Unit	kg		2,004	2,303	2,580	2,722	2,900	3,000	3,045	3,145	3,168	3,280	3,298	4,120	4,228	4,655				
	Operation weight	kg		2,017	2,317	2,594	2,736	2,914	3,014	3,085	3,185	3,208	3,326	3,344	4,166	4,288	4,716				
Water heat exchanger	Type	Plate heat exchanger																			
	Water volume	l		12	14				40				46		60						
	Water flow rate	Cooling	Nom.	l/s		7.9	9.0	10.1	11.3	14.5		16.3		18.4	19.5	20.7	24.0	27.7	30.9		
	Water pressure drop	Cooling	Nom.	kPa		24	25	31	39	21		28	26	27	38	40	51				
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler																			
Compressor	Type	Scroll compressor																			
	Quantity	4												6							
Fan	Type	Direct propeller																			
	Quantity	4				5				6				8		10		12			
	Air flow rate	Nom.		l/s		16,743	16,285	20,618	19,522	24,428		23,426		32,570	31,235		39,044	46,852			
	Speed	rpm		705																	
Sound power level	Cooling	Nom.		dBA		83	84	85	86	87		89		90	89	90	92				
Sound pressure level	Cooling	Nom.		dBA		64	65	66	67	68	67	68	69	70	69	70	71				
Operation range	Water side	Cooling	Min.~Max.	°CDB		-13~-18															
	Air side	Cooling	Min.~Max.	°CDB		-18~-52															
Refrigerant	Type / GWP	R-410A / 2,087.5																			
	Circuits	Quantity		2																	
Refrigerant charge	Per circuit	kg/TCO,Eq		14.0/29.2	15.5/32.4	16.5/34.4	20.0/41.8	24.0/50.1	26.0/54.3		31.0/64.7		35.0/73.1	36.0/75.2	41.5/86.6						
Piping connections	Evaporator water inlet/outlet (OD)	3"																			
Unit	Maximum starting current	A		276	332	346	401	472		501	618	632	646	628	754	801					
	Nominal running current (RLA)	Cooling	A		107	116	125	139	180		204	226	239	255	300	347	380				
	Maximum running current	A		132	143	157	173	220		249	283	296	310	377	419	465					
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																	

Air cooled multi-scroll inverter chiller

High efficiency

Standard sound

- › High efficiency **DC inverter scroll** compressors
- › Advanced compressor and fan design resulting in low operating sound levels
- › Dual independent refrigerant circuit for built-in redundancy and reliable operation
- › Wide operating range in cooling mode
- › Reduced footprint thanks to the **V-shaped frame** (EWAQ210GZXS & EWAQ190GZXR)
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAQ-GZXS		210	270	320	340	400	
Cooling capacity	Nom.		kW	201	270	323	340	395	
Power input	Cooling	Nom.	kW	72.5	94.0	122	117	144	
Capacity control	Method	Stepless							
	Minimum capacity		%	14.4	14.3	14.9	14.3	14.8	
EER				2.77	2.87	2.64	2.92	2.75	
ESEER				4.79	4.89	4.90	4.77	4.78	
Dimensions	Unit	Height	mm	2,270	2,223				
		Width	mm	1,290	2,234				
		Depth	mm	4,450	3,560		4,460		
Weight	Unit		kg	1,600	2,100	2,150	2,400	2,500	
	Operation weight		kg	1,677	2,233	2,297	2,575	2,688	
Water heat exchanger	Type	Plate heat exchanger							
	Water volume		l	29	61	75	79	92	
	Water flow rate	Cooling	Nom.	l/s	9.6	12.9	15.4	16.3	18.9
Air heat exchanger	Water pressure drop	Cooling	Total	kPa	27	14	15	16	18
	Type	High efficiency fin and tube type with integral subcooler							
Compressor	Type	DC Inverter Scroll							
	Quantity			6	8	10		12	
Fan	Type	Direct propeller							
	Quantity			4		6		8	
	Air flow rate	Nom.	l/s	17,473	26,209		34,946		
	Speed		rpm	920					
Sound power level	Cooling	Nom.	dB(A)	92	94		96		
Sound pressure level	Cooling	Nom.	dB(A)	75	78		79		
Operation range	Water side	Cooling	Min.~Max.	°CDB					
	Air side	Cooling	Min.~Max.	°CDB					
Refrigerant	Type / GWP	R-410A / 2,087.5							
	Circuits	Quantity		1	2				
Refrigerant charge	Per circuit		kg/TCO,Eq	48.0 / 100.2	36.0 / 75.2		48.0 / 100.2		
Piping connections	Evaporator water inlet/outlet (OD)			2.5"	4.5"				
Unit	Maximum starting current		A	2					
	Nominal running current (RLA)	Cooling	A	114	155	195	189	227	
	Maximum running current		A	155	236	281	286	309	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400					

Air cooled multi-scroll inverter chiller

High efficiency

Reduced sound



EWAQ-GZXS/XR

MicroTech III

Cooling only		EWAQ-GZXR		190	270	320	340	390		
Cooling capacity	Nom.		kW	196	264	315	334	386		
Power input	Cooling	Nom.	kW	73.3	94.8	124	117	145		
Capacity control	Method			Stepless						
	Minimum capacity			%	14.4	14.3	14.9	14.3	14.8	
EER					2.68	2.79	2.53	2.86	2.65	
ESEER					4.88	4.95	5.05	5.07		
Dimensions	Unit	Height	mm	2,270	2,223					
		Width	mm	1,290	2,234		2,241			
		Depth	mm	4,450	3,560		4,460			
Weight	Unit			kg	1,618	2,124	2,180	2,430	2,536	
	Operation weight				kg	1,695	2,257	2,327	2,605	2,724
Water heat exchanger	Type			Plate heat exchanger						
	Water volume			l	29	61	75	79	92	
	Water flow rate	Cooling	Nom.	l/s	9.4	12.6	15.0	16.0	18.5	
Air heat exchanger	Water pressure drop			Cooling	Total	kPa	26	14	15	17
	Type			High efficiency fin and tube type with integral subcooler						
Compressor	Type			DC Inverter Scroll						
	Quantity				6	8	10	12		
Fan	Type			Direct propeller						
	Quantity				4	6	8			
	Air flow rate	Nom.		l/s	15,131	22,697	30,263			
Speed				rpm	715					
Sound power level	Cooling	Nom.		dB(A)	89	91	92			
Sound pressure level	Cooling	Nom.		dB(A)	72	74	75			
Operation range	Water side	Cooling	Min.~Max.	°CDB	-8~20					
	Air side	Cooling	Min.~Max.	°CDB	-18~43					
Refrigerant	Type / GWP			R-410A / 2,087.5						
	Circuits	Quantity			1	2				
Refrigerant charge	Per circuit		kg/TCO,Eq	48.0 / 100.2	36.0 / 75.2		48.0 / 100.2			
Piping connections	Evaporator water inlet/outlet (OD)				2.5"	4.5"				
Unit	Maximum starting current			A	2					
	Nominal running current (RLA)	Cooling		A	116	157	199	190	231	
	Maximum running current			A	153	234	279	283	306	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400						

Air cooled screw chiller

Standard efficiency

Standard sound

- › One refrigerant circuit with single screw compressor
- › **Compact design** with brazed plate heat exchanger
- › Large operation range (ambient temperature down to -18°C)
- › Water supply down to -15°C

Cooling only		EWAD-E-SS		100	120	140	160	180	210	260	310	360	410		
Cooling capacity	Nom.	kW		101	121	138	163	183	213	255	306	359	411		
Power input	Cooling	Nom. kW		39.1	47.5	53.9	60.9	69.0	72.4	87.8	112	134	147		
Capacity control	Method		Stepless												
	Minimum capacity		%												
EER			25.0												
ESEER			2.58	2.54	2.55	2.67	2.64	2.95	2.90	2.73	2.67	2.80			
Dimensions	Unit	Height	mm		2,273						2,223				
		Width	mm		1,292						2,236				
		Depth	mm		2,165		3,065		3,965		3,070				
Weight	Unit	kg		1,684		1,861		2,086		2,919					
	Operation weight	kg		1,699		1,881		2,116		2,963					
Water heat exchanger	Type		Plate heat exchanger												
	Water volume		l		12	15	17	20	24	30	25	30	36	44	
	Water flow rate	Cooling	Nom. l/s		4.8	5.8	6.6	7.8	8.7	10.2	12.2	14.6	17.2	19.7	
Air heat exchanger	Water pressure drop		Cooling	Nom. kPa		24	25	23	24	22	21	47	48	45	
	Type		High efficiency fin and tube type with integral subcooler												
Compressor	Type		Single screw compressor												
	Quantity		Asymmetric single screw compressor												
Fan	Type		Direct propeller												
	Quantity		2		3		4		6						
	Air flow rate	Nom. l/s		10,924	10,576	16,386	15,865	21,848	21,153	32,772		31,729			
Sound power level	Speed		rpm		900										
	Cooling	Nom. dBA		92				93		94		95			
Sound pressure level	Cooling		Nom. dBA		74				75		76				
	Operation range	Water side	Cooling	Min.~Max. °CDB		-15~-15									
Air side		Cooling	Min.~Max. °CDB		-18~-48										
Refrigerant	Type / GWP		R-134a / 1,430												
	Circuits		Quantity												
Refrigerant charge	Per circuit		kg/TCO,Eq		18.0 / 25.7	21.0 / 30.0	23.0 / 32.9	28.0 / 40.0	34.0 / 48.6	39.0 / 55.8	46.0 / 65.8		56.0 / 80.1	74.0 / 105.8	
	Evaporator water inlet/outlet (OD)		3"												
Piping connections	Unit		Maximum starting current		A		151		195		288		410		
	Nominal running current (RLA)		Cooling	A		67	81	92	102	116	121	148	185	220	241
	Maximum running current		A		86	103	119	132	157	164	198	242	284	298	
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400										

Air cooled screw chiller

Standard efficiency

Low sound



EWAD-E-SS/SL

MicroTech III

Cooling only				EWAD-E-SL	100	120	130	160	180	210	250	300	350	400						
Cooling capacity	Nom.		kW		97.6	116	134	157	177	208	248	295	344	397						
Power input	Cooling	Nom.	kW		39.2	48.3	53.4	60.8	68.3	72.8	85.4	111	135	152						
Capacity control	Method				Stepless															
	Minimum capacity		%		25.0															
EER					2.49	2.39	2.50	2.57	2.59	2.86	2.90	2.65	2.55	2.62						
ESEER					2.92	2.88	2.76	2.91	2.98	3.22	3.44	3.31	3.24	3.35						
Dimensions	Unit	Height	mm		2,273							2,223								
		Width	mm		1,292							2,236								
		Depth	mm		2,165			3,065			3,965			3,070						
Weight	Unit		kg		1,784			1,961			2,186			3,029						
		Operation weight	kg		1,799			1,981			2,216			3,073						
Water heat exchanger	Type				Plate heat exchanger															
		Water volume	l		12	15	17	20	24	30	25	30	36	44						
		Water flow rate	Cooling	Nom.	l/s	4.7	5.5	6.4	7.5	8.4	10.0	11.9	14.1	16.5	19.0					
	Water pressure drop	Cooling	Nom.	kPa	23		22		23		21		20		45		44		42	
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler															
Compressor	Type				Single screw compressor					Asymmetric single screw compressor										
	Quantity				1															
Fan	Type				Direct propeller															
	Quantity				2		3		4		6									
	Air flow rate	Nom.	l/s		8,373	8,144	12,560	12,216	16,747	16,288	25,120		24,432							
	Speed		rpm		700															
Sound power level	Cooling	Nom.	dB(A)		89		90		92				93							
Sound pressure level	Cooling	Nom.	dB(A)		71				73				74							
Operation range	Water side	Cooling	Min.~Max.	°CDB	-15~-15															
	Air side	Cooling	Min.~Max.	°CDB	-18~-48															
Refrigerant	Type / GWP				R-134a / 1,430															
	Circuits	Quantity			1															
Refrigerant charge	Per circuit		kg/TCO,Eq		18.0 / 25.7	21.0 / 30.0	23.0 / 32.9	28.0 / 40.0	34.0 / 48.6	39.0 / 55.8	46.0 / 65.8		56.0 / 80.1	74.0 / 105.8						
Piping connections	Evaporator water inlet/outlet (OD)				3"															
Unit	Maximum starting current		A		151		195		288		330		410							
	Nominal running current (RLA)	Cooling	A		67	83	92	103	116	122	144	184	223	249						
	Maximum running current		A		83	100	115	128	151	158	189	234	276	290						
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400															

Air cooled screw chiller

Standard efficiency

Standard sound

- › 2 truly independent refrigerant circuits
- › Stepless single-screw compressor
- › Large operation range (ambient temperature down to -18°C)
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAD-D-SS		390	440	470	510	530	560	580	
Cooling capacity	Nom.		kW	388	435	463	500	529	553	575	
Power input	Cooling	Nom.	kW	154	165	169	186	196	207	199	
Capacity control	Method	Stepless									
	Minimum capacity		%	12.5							
EER				2.52	2.63	2.74	2.70		2.67	2.89	
ESEER				3.26	3.43	3.44	3.41		3.45	3.29	
Dimensions	Unit	Height	mm	2,223							
		Width	mm	2,234							
		Depth	mm	3,139			4,040				
Weight	Unit		kg	2,960	4,030	4,220		4,230		4,235	
	Operation weight		kg	3,090	4,195			4,395			
Water heat exchanger	Type	Single pass shell & tube									
	Water volume		l	130	165	175		165		160	
	Water flow rate	Cooling	Nom.	l/s	18.6	20.8	22.2	24.0	25.4	26.5	27.6
	Water pressure drop	Cooling	Nom.	kPa	46	38	67	47	52	57	51
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler									
Compressor	Type	Single screw compressor									
	Quantity	Asymmetric single screw compressor									
Fan	Type	Direct propeller									
	Quantity	6			8						
	Air flow rate	Nom.	l/s	32,772	31,729	43,696			42,306		
	Speed		rpm	890							
Sound power level	Cooling	Nom.	dBA	96	97			98	99		
Sound pressure level	Cooling	Nom.	dBA	77				79			
Operation range	Water side	Cooling	Min.-Max.	°CDB							
	Air side	Cooling	Min.-Max.	°CDB							
Refrigerant	Type / GWP	R-134a / 1,430									
	Circuits	Quantity	2								
Refrigerant charge	Per circuit		kg/TCO,Eq	28.0 / 40.0	33.0 / 47.2	36.0 / 51.5	38.0 / 54.3	40.0 / 57.2	43.0 / 61.5	47.0 / 67.2	
Piping connections	Evaporator water inlet/outlet (OD)	5.5"									
Unit	Maximum starting current		A	419	464	485		494			
	Nominal running current (RLA)	Cooling	A	254	274	281	306	321	336	324	
	Maximum running current		A	312	330	359	380	391	402		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400							

Air cooled screw chiller

Standard efficiency

Low sound



EWAD-D-SS/SL

MicroTech III

Cooling only		EWAD-D-SL		180	200	230	250	260	280	300	320	370	400	440	480	510	530	
Cooling capacity	Nom.	kW		183	197	224	244	260	274	297	320	368	402	438	475	503	531	
Power input	Cooling	kW		82.0	80.2	85.6	94.4	102	109	121	125	135	171	172	188	205	197	
Capacity control	Method	Stepless																
	Minimum capacity	%		12.5														
EER				2.24	2.46	2.62	2.58	2.54	2.50	2.46	2.56	2.72	2.36	2.55	2.53	2.46	2.70	
ESEER				2.91	3.03	3.21	3.11	3.16	3.13	3.10	3.14	3.31	3.54	3.56	3.46	3.56	3.66	
Dimensions	Unit	Height	mm	2,355										2,223				
		Width	mm	2,234														
		Depth	mm	2,239				3,139				4,040						
Weight	Unit	kg		2,475	2,470	2,860				3,187		4,030	4,220	4,230		4,235		
	Operation weight	kg		2,500				2,960				3,300		4,195	4,395			
Water heat exchanger	Type	Plate heat exchanger																
	Water volume	l		25	30	100						130		165	170		165	160
	Water flow rate	Cooling	Nom.	l/s	8.8	9.4	10.7	11.7	12.5	13.1	14.2	15.3	17.7	19.3	21.0	22.8	24.1	25.4
	Water pressure drop	Cooling	Nom.	kPa	29	22	58	49	54	59	60	55	67	48	62	54	48	43
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler																
Compressor	Type	Single screw compressor																
	Quantity	Asymmetric single screw compressor																
Fan	Type	Direct propeller																
	Quantity	4				6				8		6		8				
	Air flow rate	Nom.		l/s	15,295	14,868	22,943		22,623	22,302		30,591		24,432	33,493		32,576	
	Speed			rpm	900										705			
Sound power level	Cooling	Nom.		dB(A)	94						95	97		94		96		
Sound pressure level	Cooling	Nom.		dB(A)	75						78		75		76		77	
Operation range	Water side	Cooling	Min.~Max.	°CDB	-15~-15													
	Air side	Cooling	Min.~Max.	°CDB	-18~-48													
Refrigerant	Type / GWP	R-134a / 1,430																
	Circuits	Quantity		2														
Refrigerant charge	Per circuit	kg/TCO,Eq		18.0/25.7	21.0/30.0	23.0/32.9	26.0/37.2	28.0/40.0	29.0/41.5			35.0/50.1		36.0/51.5	34.0/48.6	40.0/57.2	43.0/61.5	
Piping connections	Evaporator water inlet/outlet (OD)	3"				4"				5"								
Unit	Maximum starting current	A		218		234		277	286	298	300	305	460	480		488		
	Nominal running current (RLA)	Cooling	A	135	133	141	155	166	176	192	200	214	281	285	308	334	323	
	Maximum running current	A		165		186	202	213	224	238	258	269	322	348	368	379		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400														

Air cooled screw chiller

Standard efficiency

Reduced sound

- › 2 truly independent refrigerant circuits
- › Stepless single-screw compressor
- › Large operation range (ambient temperature down to -18°C)
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAD-D-SR		180	190	220	240	250	270	280	310	370	400	440	480	510	530				
Cooling capacity	Nom.	kW		177	190	218	237	251	263	277	310	364	402	438	475	503	531				
Power input	Cooling	Nom. kW		84.5	83.1	86.2	95.6	104	112	123	127	140	171	172	188	205	197				
Capacity control	Method	Stepless																			
	Minimum capacity	%		12.5																	
EER				2.09	2.28	2.53	2.48	2.41	2.34	2.25	2.45	2.60	2.36	2.55	2.53	2.46	2.70				
ESEER				2.80	2.91	3.24	3.11	3.13	3.07	3.04	3.15	3.32	3.54	3.56	3.46	3.56	3.66				
Dimensions	Unit	Height	mm	2,355								2,223									
		Width	mm	2,234																	
		Depth	mm	2,239				3,139				4,040									
Weight	Unit	kg		2,620				2,890				3,335		4,040		4,240					
	Operation weight	kg		2,650				3,100				3,450		4,342		4,542					
Water heat exchanger	Type				Plate heat exchanger								Single pass shell & tube								
	Water volume	l		25	30	100						130		165		170		165		160	
	Water flow rate	Cooling	Nom.	l/s		8.5	9.1	10.4	11.3	12.0	12.6	13.3	14.9	17.4	19.3	21.0	22.8	24.1	25.4		
	Water pressure drop	Cooling	Nom.	kPa		27	20	55	47	51	55	53	65	48	62	54	48	43			
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler																			
Compressor	Type	Single screw compressor														Asymmetric single screw compressor					
	Quantity	2																			
Fan	Type	Direct propeller																			
	Quantity	4				6				8		6		8							
	Air flow rate	Nom.		l/s		12,389	11,928	18,583	18,237	17,892	24,777	24,432	33,493		32,576						
	Speed	rpm		680								705									
Sound power level	Cooling	Nom.		89				90		92		91		92		93					
Sound pressure level	Cooling	Nom.		70				73		71		73									
Operation range	Water side	Cooling	Min.~Max.	°CDB		-15~-15															
	Air side	Cooling	Min.~Max.	°CDB		-18~-48															
Refrigerant	Type / GWP	R-134a / 1,430																			
	Circuits	Quantity		2																	
Refrigerant charge	Per circuit	kg/TCO,Eq		18.0 / 25.7	21.0 / 30.0	24.0 / 34.3	25.0 / 35.8			29.0 / 41.5		33.0 / 47.2	35.0 / 50.1	40.0 / 57.2	39.0 / 55.8	40.0 / 57.2	43.0 / 61.5				
Piping connections	Evaporator water inlet/outlet (OD)	3"				4"				5"											
	Unit	Maximum starting current	A		217	232		275	284	295	297	302	460	480		488					
	Nominal running current (RLA)	Cooling	A		140	138	143	157	169	181	199	203	219	281	285	308	334	323			
	Maximum running current	A		162	182	198	209	219	234	252	263	322	348	368	379						
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																	

Air cooled screw chiller

Standard efficiency

Extra low sound



EWAD-D-SR/SX

MicroTech III

Cooling only				EWAD-D-SX	210	230	250	270	290	300	310	370	410	450	490
Cooling capacity	Nom.		kW	202	230	252	270	285	298	308	369	412	449	490	
Power input	Cooling	Nom.	kW	80.8	86.0	94.4	105	115	127	137	150	171	175	189	
Capacity control	Method			Stepless											
	Minimum capacity		%	12.5											
EER				2.50	2.68	2.67	2.56	2.47	2.35	2.25	2.46	2.41	2.56	2.60	
ESEER				3.29	3.52	3.41	3.44	3.34	3.29	3.15	3.14	3.39	3.50	3.47	
Dimensions	Unit	Height	mm	2,420											
		Width	mm	2,234											
		Depth	mm	3,139	4,040							4,940			
Weight	Unit		kg	3,110	3,475		3,425	3,430			3,560	4,302	4,506	4,581	
	Operation weight		kg	3,200	3,590					3,735	4,472	4,676	4,746		
Water heat exchanger	Type			Single pass shell & tube											
	Water volume		l	90	115		165	160			175	170		165	
	Water flow rate	Cooling	Nom.	l/s	9.7	11.0	12.1	12.9	13.7	14.3	14.7	17.7	19.7	21.5	23.5
	Water pressure drop	Cooling	Nom.	kPa	45	34	38		35	38	41	45	44	50	45
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler											
Compressor	Type			Single screw compressor										Asymmetric single screw compressor	
	Quantity			2											
Fan	Type			Direct propeller											
	Quantity			6	8							9	10		
	Air flow rate	Nom.	l/s	12,876	17,892	17,169					26,496	28,982	33,120		
	Speed		rpm	500											
Sound power level	Cooling	Nom.	dBA	84	85							86			
Sound pressure level	Cooling	Nom.	dBA	65										66	
Operation range	Water side	Cooling	Min.~Max.	-15~-15											
	Air side	Cooling	Min.~Max.	-18~-48											
Refrigerant	Type / GWP			R-134a / 1,430											
	Circuits	Quantity		2											
Refrigerant charge	Per circuit		kg/TCO,Eq	21.0 / 30.0	24.0 / 34.3	26.0 / 37.2	32.0 / 45.8	33.0 / 47.2	34.0 / 48.6			35.0 / 50.1	38.0 / 54.3	40.0 / 57.2	
Piping connections	Evaporator water inlet/outlet (OD)			4"											
Unit	Maximum starting current		A	218	232		276	284	296			406	457	475	
	Nominal running current (RLA)	Cooling	A	135	143	157	173	188	204	220	231	272	280	298	
	Maximum running current		A	164	183	199	210	221	235	250	291	316	338	360	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											

Air cooled screw chiller

High efficiency

Standard sound

- › 2 truly independent refrigerant circuits
- › Stepless single-screw compressor
- › Large operation range (ambient temperature down to -18°C)
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAD-D-XS		250	280	300	330	350	380	400	470	520	580	620	
Cooling capacity	Nom.		kW	246	274	300	326	350	374	399	467	522	573	620	
Power input	Cooling	Nom.	kW	80.1	88.2	95.4	105	114	121	129	152	169	183	196	
Capacity control	Method	Stepless													
	Minimum capacity		%	12.5											
EER				3.07	3.11	3.15	3.10	3.06	3.08	3.10	3.07	3.09	3.12	3.16	
ESEER				3.45	3.49	3.51	3.73	3.56	3.47	3.48	3.72	3.88	3.89	3.75	
Dimensions	Unit	Height	mm	2,355							2,223				
		Width	mm	2,234											
		Depth	mm	3,138	4,040					4,940					
Weight	Unit		kg	2,905	3,285	3,235	3,240				3,510	4,670	4,685		
	Operation weight		kg	3,000	3,400					3,780	4,940				
Water heat exchanger	Type	Single pass shell & tube													
	Water volume		l	95	115		165	160			270		255		
	Water flow rate	Cooling	Nom.	l/s	11.8	13.1	14.4	15.6	16.7	17.9	19.1	22.4	25.0	27.4	29.7
	Water pressure drop	Cooling	Nom.	kPa	48	45	49	46	51	58	64	47	63	56	38
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler													
Compressor	Type	Single screw compressor											Asymmetric single screw compressor		
	Quantity	2													
Fan	Type	Direct propeller													
	Quantity	6			8					10					
	Air flow rate	Nom.	l/s	22,302	30,591	29,736			43,001	42,306	43,696	54,620			
	Speed		rpm	900					890						
Sound power level	Cooling	Nom.	dBA	97					99						
Sound pressure level	Cooling	Nom.	dBA	78					79						
Operation range	Water side	Cooling	Min.-Max.	°CDB	-15~-15										
	Air side	Cooling	Min.-Max.	°CDB	-18~-48										
Refrigerant	Type / GWP	R-134a / 1,430													
	Circuits	Quantity	2												
Refrigerant charge	Per circuit		kg/TCO,Eq	29.0 / 41.5	33.0 / 47.2	35.0 / 50.1	38.0 / 54.3	35.0 / 50.1		39.0 / 55.8	42.0 / 60.1	45.0 / 64.4		50.0 / 71.5	
Piping connections	Evaporator water inlet/outlet (OD)	4"													
Unit	Maximum starting current		A	224	240			283	292	312			423	480	498
	Nominal running current (RLA)	Cooling	A	132	145	158	172	185	203	213	253	283	305	324	
	Maximum running current		A	178	199	216	227	239	268	283	328	365	387	410	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											

Air cooled screw chiller

High efficiency

Reduced sound



EWAD-D-XS/XR

MicroTech III

Cooling only				EWAD-D-XR	240	270	300	320	350	370	390	460	510	560	600	
Cooling capacity	Nom.		kW		242	271	294	321	343	369	393	453	510	559	598	
Power input	Cooling	Nom.	kW		81.6	88.0	96.3	107	117	121	129	154	169	185	200	
Capacity control	Method				Stepless											
	Minimum capacity		%		12.5											
EER					2.96	3.07	3.06	3.00	2.94	3.06	3.05	2.95	3.01	3.02	2.99	
ESEER					3.52	3.59	3.58	3.71	3.60	3.89	3.71	3.77	3.99	3.81		
Dimensions	Unit	Height	mm		2,355							2,223				
		Width	mm		2,234											
		Depth	mm		3,138	4,040							4,940			
Weight	Unit		kg		3,005	3,385		3,335	3,340			3,610	4,770	4,785		
	Operation weight		kg		3,100	3,500					3,880		5,040			
Water heat exchanger	Type				Single pass shell & tube											
	Water volume		l		95	115		165	160			270		255		
	Water flow rate	Cooling	Nom.	l/s	11.6	13.0	14.1	15.4	16.4	17.7	18.8	21.7	24.4	26.8	28.6	
	Water pressure drop	Cooling	Nom.	kPa	47	44	48	45	49	56		45	60	54	36	
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler											
Compressor	Type				Single screw compressor											
	Quantity				2											
Fan	Type				Direct propeller											
	Quantity				6	8								10		
	Air flow rate	Nom.	l/s		17,892	24,777	23,856			33,035	32,576	33,493	41,867			
	Speed		rpm		680					705			94			
Sound power level	Cooling	Nom.	dBA		92					93			94			
Sound pressure level	Cooling	Nom.	dBA		73					74						
Operation range	Water side	Cooling	Min.~Max.	°CDB	-15~-15											
	Air side	Cooling	Min.~Max.	°CDB	-18~-48											
Refrigerant	Type / GWP				R-134a / 1,430											
	Circuits	Quantity			2											
Refrigerant charge	Per circuit		kg/TCO,Eq		30.0 / 42.9	31.0 / 44.3	38.0 / 54.3	39.0 / 55.8	40.0 / 57.2	39.0 / 55.8		34.0 / 48.6	45.0 / 64.4	47.0 / 67.2	50.0 / 71.5	
Piping connections	Evaporator water inlet/outlet (OD)				4"							6"				
Unit	Maximum starting current		A		222	237		280	289	306			417	473	491	
	Nominal running current (RLA)	Cooling	A		134	144	160	175	188	200	213	256	283	308	330	
	Maximum running current		A		173	193	210	222	233	257	272	317	351	373	396	
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400											

Air cooled screw chiller

High ambient

Standard sound

- › **High ambient**
- › Stepless single-screw compressor
- › Large operation range (ambient temperature down to -18°C)
- › MicroTech III controller with superior control logic and easy interface



Cooling only		EWAD-D-HS		200	210	230	260	270	290	310	340	380	420	450	480	510	550	590									
Cooling capacity	Nom.	kW		194	208	233	255	272	288	305	334	379	413	446	476	512	545	585									
Power input	Cooling	Nom. kW		77.9	76.0	83.9	92.1	98.9	105	114	122	129	143	152	164	177	185	194									
Capacity control	Method	Stepless																									
	Minimum capacity	%		12.5																							
EER				2.49	2.73	2.77		2.75	2.73	2.68	2.75	2.93	2.90	2.93	2.90	2.89	2.95	3.02									
ESEER				3.02	3.16	3.24	3.11	3.20	3.18	3.17	3.15	3.46	3.50	3.57		3.55	3.60	3.68									
Dimensions	Unit	Height	mm		2,223																						
		Width	mm		2,234																						
		Depth	mm		2,239			3,339			4,040			4,940													
Weight	Unit	kg		2,475	2,470	2,865		2,870		3,185		3,277	3,942	4,356	4,361	4,366											
		Operation weight		kg		2,500		2,960		3,300		3,447	4,112	4,526													
Water heat exchanger	Type	Plate heat exchanger																									
	Water volume	l		25			30			95			90			115			170			165			160		
	Water flow rate	Cooling	Nom. l/s		9.3	9.9	11.1	12.2	13.1	13.8	14.6	16.0	18.2	19.8	21.4	22.8	24.5	26.1	28.0								
Water pressure drop	Cooling	Nom. kPa		32	24	46	52	54	59	64	58	70	46	53	58	51	56	53									
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler																									
Compressor	Type	Single screw compressor																									
	Quantity	Asymmetric single screw compressor																									
Fan	Type	Direct propeller																									
	Quantity	4			6			8			10																
	Air flow rate	Cooling	Nom. l/s		21,848	21,153	32,772		32,251	31,729	43,696		42,306	54,620													
Speed	Cooling	Nom. rpm		890																							
Sound power level	Cooling	Nom. dBA		96			97			99	97	98			99	100											
Sound pressure level	Cooling	Nom. dBA		77			79			77	78			79	80												
Operation range	Water side	Cooling	Min.-Max. °CDB		-15~-15																						
	Air side	Cooling	Min.-Max. °CDB		-18~-48																						
Refrigerant	Type / GWP	R-134a / 1,430																									
	Circuits	Quantity		2																							
Refrigerant charge	Per circuit	kg/TCO,Eq		18.0 / 25.7	21.0 / 30.0	22.0 / 31.5	26.0 / 37.2	28.0 / 40.0	31.0 / 44.3	28.0 / 40.0	34.0 / 48.6	30.0 / 42.9	45.0 / 64.4	47.5 / 67.9	46.0 / 65.8	47.0 / 67.2											
Piping connections	Evaporator water inlet/outlet (OD)	3"			4"			5"																			
	Unit	Maximum starting current	A		222	239		283	291	303	307	312	423	468	489	498											
	Nominal running current (RLA)	Cooling	A		134	131	145	157	169	180	191	204	214	239	258	275	295	306	320								
Maximum running current	A		172	197	213	224	234	249	272	283	320	338	367	388	399	410											
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																							



Air cooled screw chiller

Standard efficiency

Standard/low sound

- › Stepless single-screw compressor
- › Large operation range (ambient temperature down to -18°C and up to 46°C)
- › 2-3 truly independent refrigerant circuits
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Partial and total heat recovery option available
- › Standard electronic expansion valve
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAD-C-SS/SL		650	740	830	910	970	C11	C12	C13	H14	C15	C16	C17	C18	C19	C20																											
Cooling capacity	Nom.	kW		645	741	829	908	962	1,059	1,146	1,315	1,412	1,532	1,615	1,706	1,797	1,870	1,917																											
Power input	Cooling	Nom.		kW		223	265	302	322	355	382	408	446	479	557	586	627	669	687	721																									
Capacity control	Method	Stepless																																											
	Minimum capacity	%		12.5									7.0																																
EER				2.89	2.80	2.74	2.82	2.71	2.77	2.81	2.95		2.75		2.72	2.69	2.72	2.66																											
ESEER				3.79	3.69	3.72	3.65	3.60	3.69	3.63	3.88	3.86	3.73	3.68	3.59	3.71	3.68																												
Dimensions	Unit	Height	mm		2,540																																								
		Width	mm		2,285																																								
		Depth	mm		6,285			7,185			8,085			8,985			10,285			11,185			12,085																						
Weight (SS)	Unit	kg		5,330	5,740	5,760	6,280	6,560	7,010	7,280	7,900	10,320	10,710	10,770	11,240	11,600																													
	Operation weight	kg		5,610	5,990	6,010	6,530	6,810	7,250	7,520	8,280	10,730	11,110	11,260	12,110	12,480																													
Weight (SL)	Unit	kg		5,920	6,030	6,050	6,570	6,850	7,300	7,570	8,190	10,770	11,150	11,210	11,680	12,040																													
	Operation weight	kg		6,200	6,280	6,300	6,820	7,100	7,540	7,810	8,570	11,170	11,550	11,700	12,560	12,920																													
Water heat exchanger	Type	Single pass shell & tube																																											
	Water flow rate	Cooling	Nom.	l/s		30.9	35.5	39.7	43.5	46.1	50.8	55.0	62.9	67.6	73.4	77.4	81.8	86.0	89.5	91.7																									
	Water pressure drop	Cooling	Nom.	kPa		73	54	53	62	69	64	74	54	58	62	68	75	36	39	40																									
	Water volume	l		266			251			243			386			408			474			850																							
Air heat exchanger	Type	High efficiency fin and tube type																																											
Compressor	Type	Asymmetric single screw compressor																																											
	Quantity	2									3																																		
Fan	Type	Direct propeller																																											
	Quantity	10			12			14			16			18			20			22			24																						
	Air flow rate	Nom.		l/s		53,442			64,131			74,819			85,508			96,196			106,885			117,573			128,262																		
	Speed	rpm		900																																									
Sound power level (SS)	Cooling	Nom.		dBA		102	100			101			102			103			104																										
Sound power level (SL)	Cooling	Nom.		dBA		96			98			97			98			99			100			101																					
Sound pressure level (SS)	Cooling	Nom.		dBA		81	80			81									82																										
Sound pressure level (SL)	Cooling	Nom.		dBA		76									77									78																					
Operation range	Air side	Cooling	Min.~Max.		°CDB		-18~46																																						
	Water side	Cooling	Min.~Max.		°CDB		-8~15																																						
Refrigerant	Type / GWP	R-134a / 1,430																																											
	Circuits	Quantity		2									3																																
Refrigerant charge	Per circuit	kg/TCO,Eq		64.0 / 91.5			76.5 / 109.4			80.0 / 114.4			91.0 / 130.1			94.0 / 134.4			110.0 / 157.3			130.0 / 185.9			73.3 / 104.9			86.7 / 123.9			91.7 / 131.1			101.7 / 145.4											
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm																																											
Unit	Starting current	Max		A		604	649			915			962			1,017			1,021			1,068			1,081			1,312			1,363			1,367			1,410			1,456			1,470		
	Running current	Cooling	Nom.		A		366	432	492	524	577	624	667	726	773	909	959.0	1,023	1,092	1,116	1,164																								
		Max	A		476	545	589	656	715	787	859	921	974	1,144	1,217	1,281	1,334	1,395	1,449																										
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																																									

Air cooled screw chiller

Standard efficiency

Reduced sound



EWAD-C-SS/SL/SR

MicroTech III

Cooling only				EWAD-C-SR	620	720	790	880	920	C10	C11	C12	H14	C13	C14	C15	C16	C17	C18	C19	
Cooling capacity	Nom.			kW	616	712	786	872	918	1,016	1,107	1,266	1,316	1,363	1,465	1,550	1,616	1,710	1,790	1,828	
Power input	Cooling	Nom.		kW	226	276	317	334	373	398	422	461	499	522	582	609	654	706	722	762	
Capacity control	Method				Stepless																
	Minimum capacity			%	12.5										7.0						
EER					2.74	2.59	2.48	2.61	2.46	2.55	2.63	2.75	2.63	2.61	2.52	2.54	2.47	2.42	2.48	2.40	
ESEER					3.91	3.78	3.81	3.79	3.98	3.76	3.95	3.92	3.81	3.78	3.70	3.72	3.66	3.70	3.71	3.66	
Dimensions	Unit	Height		mm	2,540																
		Width		mm	2,285																
		Depth		mm	6,285					7,185	8,085	10,285			11,185			12,085			
Weight	Unit			kg	5,920	6,030	6,050	6,570	6,850	7,300	7,570	8,190		10,750	10,770	11,150	11,210	11,680	12,040		
	Operation weight			kg	6,200	6,280	6,300	6,820	7,100	7,540	7,810	8,570		11,170		11,550	11,700	12,560	12,920		
Water heat exchanger	Type				Single pass shell & tube																
	Water flow rate	Cooling	Nom.	l/s	29.5	34.1	37.6	41.8	44.0	48.7	53.1	60.6	63.0	65.2	70.2	74.2	77.3	81.8	85.6	87.5	
	Water pressure drop	Cooling	Nom.	kPa	43	50	48	58	63	60	69	50	54	45	57	63	46	33	36	37	
	Water volume			l	266		251		243		386		421	408		474		850			
Air heat exchanger	Type				High efficiency fin and tube type																
Compressor	Type				Asymmetric single screw compressor																
	Quantity				2										3						
Fan	Type				Direct propeller																
	Quantity				10			12		14	16	18			20		22		24		
	Air flow rate	Nom.		l/s	41,007			49,208		57,410	65,611	73,812			82,014		90,215		98,417		
	Speed			rpm	700																
Sound power level	Cooling	Nom.		dB(A)	92			93		94			95			96					
Sound pressure level	Cooling	Nom.		dB(A)	71	72			73			74									
Operation range	Air side	Cooling	Min.~Max.	°CDB	-18~46																
	Water side	Cooling	Min.~Max.	°CDB	-8~15																
Refrigerant	Type / GWP				R-134a / 1,430																
	Circuits	Quantity			2										3						
Refrigerant charge	Per circuit			kg/TCO ₂ Eq	64.0/91.5		76.5/109.4		80.0/114.4	91.0/130.1	94.0/134.4	110.0/157.3			86.7/123.9			91.7/131.1	101.7/145.4		
Piping connections	Evaporator water inlet/outlet (OD)				168.3mm					219.1mm					273mm						
Unit	Starting current	Max		A	597	642			906	953	1,007	1,010	1,055	1,068	1,241	1,292	1,344	1,346	1,389	1,434	1,447
	Running current	Cooling	Nom.	A	371	450	518	548	609	654	694	755	811	857	954	1,002	1,075	1,158	1,179	1,238	
		Max		A	462	531	575	639	698	767	837	895	949	1,052	1,116	1,186	1,250	1,303	1,362	1,415	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																

Air cooled screw chiller

High efficiency

Standard/low sound

- › Stepless single-screw compressor
- › Large operation range (ambient temperature down to -18°C and up to 50°C)
- › 2-3 truly independent refrigerant circuits
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Partial and total heat recovery option available
- › Standard electronic expansion valve
- › MicroTech III controller with superior control logic and easy interface

Cooling only				EWAD-C-XS/XL																		
				760	830	890	990	C10	C11	C12	C13	H14	H15	C16	C17	C18	C19	C20	C21	C22		
Cooling capacity	Nom.	kW		752	827	885	997	1,069	1,192	1,276	1,343	1,408	1,517	1,590	1,678	1,760	1,849	1,896	1,947	2,002		
Power input	Cooling	kW		237	256	282	311	343	367	404	416	450	483	510	541	569	598	619	648	678		
Capacity control	Method	Stepless																				
	Minimum capacity	%		12.5										7.0								
EER				3.17	3.22	3.14	3.20	3.12	3.25	3.15	3.23	3.13	3.14	3.12	3.10	3.09		3.06	3.00	2.95		
ESEER				3.77	3.92	3.81	3.91	3.84	3.99	3.86	4.05	4.04	4.06	4.00	3.96	3.94	3.93	4.02	3.91	3.89		
Dimensions	Unit	Height	mm	2,540																		
		Width	mm	2,285																		
		Depth	mm	6,285	7,185			8,085			9,885			12,085	12,985	13,885		14,785				
Weight (XS)	Unit	kg		5,990	6,340	6,360	7,190	7,470	8,220	8,240	8,900			11,570	11,900	12,260		12,600				
	Operation weight	kg		6,240	6,580	6,600	7,600	7,870	8,610	8,630	9,890			12,430	12,760	13,140		13,470				
Weight (XL)	Unit	kg		6,280	6,630	6,650	7,480	7,760	8,510	8,530	9,190			12,010	12,350	12,700		13,040				
	Operation weight	kg		6,520	6,870	6,890	7,880	8,160	8,900	8,920	10,180			12,870	13,200	13,580		13,910				
Water heat exchanger	Type	Single pass shell & tube																				
	Water flow rate	Cooling	Nom.	l/s	36.1	39.6	42.4	47.8	51.2	57.1	61.1	64.4	67.5	72.8	76.1	80.4	84.4	88.6	90.7	93.2	95.8	
	Water pressure drop	Cooling	Nom.	kPa	81	57	64	61	69	45	51	68	77	84	62	68	74	39	41	43		
	Water volume	l		251	243		403			386			979		850		871		850			
Air heat exchanger	Type	High efficiency fin and tube type																				
Compressor	Type	Asymmetric single screw compressor																				
	Quantity	2										3										
Fan	Type	Direct propeller																				
	Quantity	12			14			16			20			24	26	28	30					
	Air flow rate	Nom.		l/s	64,131	74,819			85,508			106,885			128,262	138,950	149,639		160,327			
	Speed	rpm		900																		
Sound power level (XS)	Cooling	Nom.		dB(A)	100	101			102			103			104							
Sound power level (XL)	Cooling	Nom.		dB(A)	97			98			99			100								
Sound pressure level (XS)	Cooling	Nom.		dB(A)	80			81			80			81								
Sound pressure level (XL)	Cooling	Nom.		dB(A)	76	77									78							
Operation range	Air side	Cooling	Min.~Max.	°CDB															-18~-50			
	Water side	Cooling	Min.~Max.	°CDB															-8~-15			
Refrigerant	Type / GWP	R-134a / 1,430																				
	Circuits	2										3										
Refrigerant charge	Per circuit	kg/TCO,Eq		750/1073	810/1158		910/1301	1000/1430	1150/1645	1175/1680	1250/1788	1455/2081	1250/1788	990/1416	827/1182	1033/1478	1090/1559	1133/1621	1200/1716			
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm																				
	Unit	Starting current	Max	A	618	657			923	970	1,029			1,072	1,085	1,268	1,328	1,387	1,430	1,472	1,486	
		Running current	Cooling	Nom.	A	387	423	463	511	559	607	667	686	731	778	835	885	934.0	984	1,018	1,059	1,100
		Max	A	510	561	605	672	731	811	875			929	982	1,096	1,168	1,241	1,313	1,366	1,419	1,473	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																		

Air cooled screw chiller

High efficiency

Reduced sound



EWAD-C-XS/XL/XR

MicroTech III

Cooling only		EWAD-C-XR		740	810	870	970	C10	C11	C12	C13	H14	H15	C16	C17	C18	C19	C20	C21	C22			
Cooling capacity	Nom.	kW		732	808	862	970	1,036	1,164	1,243	1,297	1,360	1,460	1,544	1,632	1,715	1,805	1,849	1,897	1,947			
Power input	Cooling	Nom. kW		238	257	285	313	348	369	409	420	460	498	518	548	574	604	629	662	696			
Capacity control	Method	Stepless																					
	Minimum capacity	%		12.5										7.0									
EER				3.07	3.15	3.03	3.10	2.98	3.16	3.04	3.09	2.96	2.93	2.98		2.99		2.94	2.87	2.80			
ESEER				4.01	4.16	4.01	4.12	4.01	4.21	4.07	4.10	4.12	4.08	4.00	4.05	4.00	4.05	4.00	4.09	3.96	3.94		
Dimensions	Unit	Height	mm		2,540																		
		Width	mm		2,285																		
		Depth	mm		6,285	7,185	8,085		9,885				12,085	12,985	13,885	14,785							
Weight	Unit	kg		6,280	6,630	6,650	7,480	7,760	8,510	8,530	9,190		12,010	12,350	12,700	13,040							
	Operation weight	kg		6,520	6,870	6,890	7,880	8,160	8,900	8,920	10,180		12,870	13,200	13,580	13,910							
Water heat exchanger	Type	Single pass shell & tube																					
	Water flow rate	Cooling	Nom.	l/s		35.1	38.7	41.3	46.5	49.7	55.7	59.5	62.1	65.2	70.0	74.0	78.2	82.2	86.5	88.5	90.7	93.1	
	Water pressure drop	Cooling	Nom.	kPa		77	54	61	58	65	43	49	64	73	79	59	65	71	37	39	41		
	Water volume	l		251	243		403		386				979	850	871	850							
Air heat exchanger	Type	High efficiency fin and tube type																					
Compressor	Type	Asymmetric single screw compressor																					
	Quantity	2										3											
Fan	Type	Direct propeller																					
	Quantity	12		14		16		20				24		26		28		30					
	Air flow rate	Nom. l/s		49,208		57,410		65,611		82,014				98,417		106,618		114,819		123,021			
	Speed	rpm		700																			
Sound power level	Cooling	Nom. dBA		92		94		95				96		97									
Sound pressure level	Cooling	Nom. dBA		72		73		72				73		74									
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~50																	
	Water side	Cooling	Min.~Max.	°CDB		-8~15																	
Refrigerant	Type / GWP	R-134a / 1,430																					
	Circuits	2										3											
Refrigerant charge	Per circuit	kg/TCO,Eq		750/1073	810/1158		910/v	1000/1430	1150/1645	1175/1680	1250/1788	1240/1773	1033/1478	1090/1559	1133/1621	1200/1716		1250/1788					
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm				219.1mm				273mm													
Unit	Starting current	Max		A		610	647		911	959	1,015		1,058	1,071	1,246	1,303	1,359		1,402	1,444	1,458		
	Running current	Cooling	Nom.	A		392	426	470	518	572	613	679	699	753	807	854	903	951	1,000	1,040	1,087	1,136	
		Max		A		493	542	585	649	708	783	847		901	954	1,063	1,132	1,201	1,271	1,324	1,377	1,431	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																			

Air cooled screw chiller

Premium efficiency

Standard/low sound

- › Stepless single-screw compressor
- › Excellent part load efficiency
- › Large operation range (ambient temperature down to -18°C and up to 52°C)
- › 2 truly independent refrigerant circuits
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Partial and total heat recovery option available
- › Standard electronic expansion valve
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAD-C-PS/PL		820	890	980	C11	C12	C13	C14	C15	C16		
Cooling capacity	Nom.	kW		818	886	973	1,070	1,153	1,274	1,384	1,467	1,554		
Power input	Cooling	Nom. kW		229	253	276	306	335	368	402	432	461		
Capacity control	Method	Stepless												
	Minimum capacity	%		12.5										
EER				3.57	3.51	3.52	3.49	3.44	3.46	3.44	3.40	3.37		
ESEER				4.22	4.25	4.30	4.29	4.14	4.23	4.07	4.06	4.03		
Dimensions	Unit	Height	mm		2,540									
		Width	mm		2,285									
		Depth	mm		8,985		9,885		11,185		12,085			
Weight (PS)	Unit	kg		7,530		7,660		8,290		8,550		9,390		
	Operation weight	kg		8,130		8,700		9,330		9,590		10,380		
Weight (PL)	Unit	kg		7,820		7,950		8,580		8,840		10,380		
	Operation weight	kg		8,420		8,990		9,620		9,880		10,670		
Water heat exchanger	Type	Single pass shell & tube												
	Water flow rate	Cooling	Nom.	l/s		39.2	42.5	46.5	51.2	55.2	61.0	66.3	70.3	74.5
	Water pressure drop	Cooling	Nom.	kPa		58	67	31	61	70	60	70	81	88
	Water volume	l		599		1,043		1,027		995		979		
Air heat exchanger	Type	High efficiency fin and tube type												
Compressor	Type	Asymmetric single screw compressor												
	Quantity	2												
Fan	Type	Direct propeller												
	Quantity				18		20		22		24			
	Air flow rate	Nom.		l/s		96,196		106,885		117,573		128,262		
	Speed	rpm		900										
Sound power level (PS)	Cooling	Nom.		dBA		101		102		103		104		
Sound power level (PL)	Cooling	Nom.		dBA		98		99		100		100		
Sound pressure level (PS)	Cooling	Nom.		dBA		80		81		80		81		
Sound pressure level (PL)	Cooling	Nom.		dBA		77		77		78		78		
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~52								
	Water side	Cooling	Min.~Max.	°CDB		-8~15								
Refrigerant	Type / GWP	R-134a / 1,430												
	Circuits	Quantity		2										
Refrigerant charge	Per circuit	kg/TCO,Eq		102.0 / 145.9		115.0 / 164.5		120.0 / 171.6		137.5 / 196.6		140.0 / 200.2		
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm				273mm								
Unit	Starting current	Max		A		630		665		702		978		
	Running current	Cooling	Nom.		A		386		424		465		511	
		Max		A		534		577		621		670		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400										

Air cooled screw chiller

Premium efficiency

Reduced sound



EWAD-C-PS/PL/PR

MicroTech III

Cooling only		EWAD-C-PR		810	880	960	C10	C11	C13	C14	C15	C16			
Cooling capacity	Nom.	kW		806	871	954	1,049	1,127	1,246	1,353	1,432	1,513			
Power input	Cooling	kW		222	248	275	303	335	369	402	432	465			
Capacity control	Method	Stepless													
	Minimum capacity	%		12.5											
EER				3.63	3.51	3.47	3.46	3.36	3.38	3.36	3.32	3.25			
ESEER				4.39	4.33	4.40	4.35	4.25	4.33	4.26	4.23	4.15			
Dimensions	Unit	Height	mm		2,540										
		Width	mm		2,285										
		Depth	mm		8,985		9,885		11,185		12,085				
Weight	Unit	kg		7,820		7,950		8,580		8,840		10,380			
	Operation weight	kg		8,420		8,990		9,620		9,880		10,670			
Water heat exchanger	Type	Single pass shell & tube													
	Water flow rate	Cooling	Nom.	l/s		38.6	41.7	45.6	50.2	54.0	59.7	64.8	68.7	72.6	
	Water pressure drop	Cooling	Nom.	kPa		56	65	30	59	67	58	67	77	84	
	Water volume	l		599		1,043		1,027		995		979			
Air heat exchanger	Type	High efficiency fin and tube type													
Compressor	Type	Asymmetric single screw compressor													
	Quantity	2													
Fan	Type	Direct propeller													
	Quantity			18				20		22		24			
	Air flow rate	Nom.		l/s		73,812		82,014		90,215		98,417			
	Speed	rpm		700											
Sound power level	Cooling	Nom.		93				94				95			
Sound pressure level	Cooling	Nom.		71				72				73			
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~52									
	Water side	Cooling	Min.~Max.	°CDB		-8~15									
Refrigerant	Type / GWP	R-134a / 1,430													
	Circuits	Quantity		2											
Refrigerant charge	Per circuit	kg/TCO,Eq		102.0 / 145.9			115.0 / 164.5		120.0 / 171.6		137.5 / 196.6		140.0 / 200.2		
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm				273mm									
Unit	Starting current	Max		A		618	653	917	964	1,020		1,063	1,076		
	Running current	Cooling	Nom.		A		375	416	461	506	555	614	671	717	764
		Max	A		509	552	596	660	719	788	858	911	964		
	Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400										

Air cooled screw inverter chiller

High efficiency

Standard/low sound

- › High efficiency with leader-of-class ESEER
- › Inverter stepless single-screw compressor
- › Highly efficient fans with patented blade profile for quiet operation
- › Extensive option list (heat recovery option available)
- › Wide operating range
- › Low starting current
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWAD-CZXS/XL		740	830	900	C10	C11	C12	C13	C14	C15	C16	C17	C18																
Cooling capacity	Nom.	kW		734	828	898	1,033	1,090	1,232	1,303	1,444	1,538	1,616	1,701	1,795																
Power input	Cooling	Nom.		kW		239	269	309	343	380	404	447	494	538	564	596	619														
Capacity control	Method	Stepless																													
	Minimum capacity	20.0												13.0																	
EER				3.07		2.90	3.01	2.87	3.05	2.92	2.93	2.86		2.85	2.90																
ESEER				4.72	4.89	4.88	4.91	4.70		4.51	4.73	4.83	4.59	4.62	4.61																
Dimensions	Unit	Height	2,540																												
		Width	2,285																												
		Depth	6,725		7,625		8,525		10,325		11,625		12,525		13,425		14,325														
Weight (XS)	Unit	kg																													
	Operation weight	6,000		6,620		6,870		7,440		8,570		8,970		9,600		9,940		11,370		12,190		12,920									
Weight (XL)	Unit	kg																													
	Operation weight	6,280		6,900		7,150		7,720		8,850		9,250		9,880		10,220		11,790		12,610		13,340									
Water heat exchanger	Type	Single pass shell & tube																													
	Water flow rate	Cooling	Nom.		l/s		35.2	39.7	43.0	49.5	52.3	59.0	62.4	69.2	73.7	77.4	81.5	86.0													
	Water pressure drop	Cooling	Nom.		kPa		83	58	65	63	70	47	52	62	72	63	69	65													
	Water volume	l		248		241		441		383		374		850		871															
Air heat exchanger	Type	High efficiency fin and tube type																													
Compressor	Type	Asymmetric single screw compressor																													
	Quantity	2												3																	
Fan	Type	Direct propeller																													
	Quantity	12		14		16		20		22		24		26		28															
	Air flow rate	Nom.		l/s		65,026		75,863		86,701		108,376		119,214		130,051		129,455		140,143		151,130									
	Speed	rpm																													
Sound power level (XS)	Cooling	Nom.		dBA		102		103		104		106																			
Sound power level (XL)	Cooling	Nom.		dBA		99		100		101		103																			
Sound pressure level (XS)	Cooling	Nom.		dBA		81		83																							
Sound pressure level (XL)	Cooling	Nom.		dBA		78		80																							
Operation range	Air side	Cooling	Min.~Max.		°CDB		-18~50																								
	Water side	Cooling	Min.~Max.		°CDB		-8~15																								
Refrigerant	Type / GWP	R-134a / 1,430																													
	Circuits	Quantity		2												3															
Refrigerant charge	Per circuit	kg/TCO,Eq		73.0/104.4		81.0/115.8		100.0/143.0		125.0/178.8		140.0/200.2		106.7/152.5		113.3/162.1		116.7/166.8													
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm						219.1mm						273mm																	
	Unit	Starting current	Max		A		377		420		451		501		540		590		626		709		772		848		899		949		
Power supply	Running current	Cooling		Nom.		A		406		442		485		537		591		636		698		769		837		881		931		970	
	Max	A		529		584		632		697		755		824		877		979		1,081		1,132		1,193		1,255					
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																											

Air cooled screw inverter chiller

High efficiency
Reduced sound



Cooling only		EWAD-CZXR		700	790	850	980	C10	C11	C12	C13	C14	C15	C16	C17													
Cooling capacity	Nom.	kW		696	786	849	972	1,027	1,166	1,231	1,327	1,437	1,539	1,624	1,706													
Power input	Cooling	Nom. kW		246	274	318	351	393	412	459	493	523	585	617	638													
Capacity control	Method		Stepless																									
	Minimum capacity		%		20.0								13.0															
EER				2.83	2.86	2.67	2.77	2.61	2.83	2.68	2.69	2.75	2.63		2.67													
ESEER				5.23	5.39	5.36	5.41	5.11	5.15	4.80	5.12	5.22	5.10	4.83	4.77													
Dimensions	Unit	Height		2,540																								
		Width		2,285																								
		Depth		mm		6,725		7,625		8,525		10,325		11,625		12,525		13,425		14,325								
Weight	Unit		kg		6,470		7,100		7,360		8,390		9,500		9,920		10,550		10,910		13,000		13,840		14,610			
	Operation weight		kg		6,720		7,340		7,600		8,390		9,500		9,920		10,550		10,910		13,000		13,840		14,610			
Water heat exchanger	Type		Single pass shell & tube																									
	Water flow rate	Cooling	Nom. l/s		33.4	37.6	40.7	46.6	49.2	55.8	58.9	63.6	68.8	73.7	77.8	81.7												
	Water pressure drop	Cooling	Nom. kPa		76	54	59	58	64	43	48	57	66	57	63	60												
	Water volume		l		248		241		441		383		374		850		871											
Air heat exchanger	Type		High efficiency fin and tube type																									
Compressor	Type		Asymmetric single screw compressor																									
	Quantity		2										3															
Fan	Type		Direct propeller																									
	Quantity		12		14		16		20		22		24		26		28											
	Air flow rate	Nom.	l/s		49,843		58,151		66,458		83,072		91,380		99,687		107,994		116,301									
	Speed		rpm		700																							
Sound power level	Cooling	Nom. dBA		95		96				97				99														
Sound pressure level	Cooling	Nom. dBA		74																								
Operation range	Air side	Cooling	Min.~Max. °CDB		-18~50																							
	Water side	Cooling	Min.~Max. °CDB		-8~15																							
Refrigerant	Type / GWP		R-134a / 1,430																									
	Circuits		Quantity		2								3															
Refrigerant charge	Per circuit		kg/TCO,Eq		73.0/104.4		81.0/115.8		100.0/143.0		125.0/178.8		140.0/200.2		106.7/152.5		113.3/162.1		116.7/166.8									
Piping connections	Evaporator water inlet/outlet (OD)		168.3mm																									
	Unit		219.1mm																									
Unit	Starting current		Max A		369		410		442		490		528		576		612		693		756		825		873		921	
	Running current	Cooling	Nom. A		416		449		498		549		610		647		715		789		859		912		960		998	
		Max A		A		512		565		612		675		732		796		849		949		1,048		1,098		1,157		1,215
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400																							

Air cooled screw chiller with free cooling

High efficiency

Standard/low sound

- › Free cooling chiller for space cooling and industrial processes
- › Stepless single-screw compressor
- › Greater energy savings and reduced CO₂ emissions during cold season
- › Wide operating range
- › MicroTech III controller with superior control logic and easy interface

Cooling only				EWAD-CFXS/XL	640	770	850	900	C10	C11	C12	C13	C14	C15	C16	
Cooling capacity	Nom.			kW	640 (1)	772 (1)	852 (1)	902 (1)	1,027 (1)	1,089 (1)	1,269 (1)	1,349 (1)	1,435 (1)	1,493 (1)	1,555 (1)	
Free cooling capacity	Nom.			kW	415 (2)	510 (2)	583 (2)	612 (2)	701 (2)	734 (2)	902 (2)	957 (2)	963 (2)	1,013 (2)	1,039 (2)	
Mechanical capacity				kW	225 (2)	262 (2)	269 (2)	290 (2)	325 (2)	355 (2)	366 (2)	392 (2)	472 (2)	480 (2)	517 (2)	
Air temperature for free cooling 100%				°C	-0.8	-0.1	1.2	0.4	0.9	0.1	2.9	2.1	1.3	0.7	0.1	
Power input	Cooling	Nom.		kW	257 (1) / 53.7 (2)	272 (1) / 62.0 (2)	293 (1) / 64.7 (2)	324 (1) / 69.8 (2)	360 (1) / 75.7 (2)	399 (1) / 83.4 (2)	397 (1) / 86.4 (2)	439 (1) / 92.8 (2)	454 (1) / 101 (2)	492 (1) / 109 (2)	530 (1) / 115 (2)	
Capacity control	Method			Stepless												
	Minimum capacity			%												
EER					2.49 (1) / 11.91 (2)	2.84 (1) / 12.44 (2)	2.90 (1) / 13.17 (2)	2.78 (1) / 12.93 (2)	2.85 (1) / 13.56 (2)	2.73 (1) / 13.05 (2)	3.19 (1) / 14.68 (2)	3.08 (1) / 14.55 (2)	3.16 (1) / 14.21 (2)	3.04 (1) / 13.72 (2)	2.93 (1) / 13.50 (2)	
ESEER					3.44	3.52	3.78	3.50	3.74	3.54	3.88	3.78	4.01	3.96	3.85	
Dimensions	Unit	Height		mm	2,565											
		Width		mm	2,480											
		Depth		mm	6,300	7,200	8,100	9,000			10,800					
Weight (XS)	Unit			kg	7,760	8,340	8,900	10,160	10,420	11,900			12,540	12,620	12,670	
	Operation weight			kg	8,515	9,100	9,705	11,169	11,429	13,276			14,516	14,596	14,646	
Weight (XL)	Unit			kg	8,050	8,620	9,190	10,450	10,710	12,190			12,830	12,910	12,960	
	Operation weight			kg	8,795	9,390	9,995	11,459	11,719	13,566			14,806	14,886	14,936	
Water heat exchanger	Type			Single pass shell & tube												
	Water volume			l	741	771	808		1,012		1,372		1,965			
	Water flow rate	Cooling	Nom.	l/s	27.8 (1) / 27.8 (2)	33.5 (1) / 33.5 (2)	37.0 (1) / 37.0 (2)	39.2 (1) / 39.2 (2)	44.6 (1) / 44.6 (2)	47.3 (1) / 47.3 (2)	55.1 (1) / 55.1 (2)	58.6 (1) / 58.6 (2)	62.4 (1) / 62.4 (2)	64.9 (1) / 64.9 (2)	67.6 (1) / 67.6 (2)	
Water pressure drop	Cooling	Nom.	kPa	85 (1) / 128 (2)	105 (1) / 172 (2)	90 (1) / 178 (2)	101 (1) / 198 (2)	111 (1) / 245 (2)	124 (1) / 272 (2)	98 (1) / 232 (2)	110 (1) / 259 (2)	139 (1) / 305 (2)	150 (1) / 328 (2)	162 (1) / 354 (2)		
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler												
Compressor	Type			Asymmetric single screw compressor												
	Quantity			2												
Fan	Type			Direct propeller												
	Quantity			10	12	14	16			20						
	Air flow rate	Nom.		l/s	50,368	60,441	70,515		80,588			95,253				
	Speed			rpm												
Sound power level (XS)	Cooling	Nom.		100		101			102		103					
Sound power level (XL)	Cooling	Nom.		96		97			98		99					
Sound pressure level (XS)	Cooling	Nom.		79		80			81		80					
Sound pressure level (XL)	Cooling	Nom.		76		77			77							
Operation range	Water side	Cooling	Min.~Max.	°CDB	-8~15											
	Air side	Cooling	Min.~Max.	°CDB	-20~45											
Refrigerant	Type / GWP			R-134a / 1,430												
	Circuits			Quantity												
Refrigerant charge	Per circuit			kg/TCO _{Eq}	64.0/91.5	73.0/104.4	81.0/115.8		91.0/130.1		107.0/153.0		112.5/160.9	124.0/177.3		
Piping connections	Evaporator water inlet/outlet (OD)			DN150PN16(168.3mm)				DN200PN16(219.1mm)				DN250PN16(273mm)				
Unit	Maximum starting current			A	605	619	658		924	971	1,030			1,073	1,086	
	Nominal running current (RLA)	Cooling		A	404	430	467	515	568	628	636	701	720	773	825	
	Maximum running current			A	476	510	561	605	672	731	811	875		929	982	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

(1) Cooling: entering evaporator water temp. 16°C; leaving evaporator water temp. 10°C; ambient air temp. 35°C; full load operation. (2) Data is calculated at ambient air temperature 5°C, inlet water temperature 16°C.

Air cooled screw chiller with free cooling

High efficiency

Reduced sound



EWAD-CFXS/XL/XR

MicroTech III

Cooling only		EWAD-CFXR		600	740	820	870	980	C10	C11	C12	C13	C14	C15	
Cooling capacity	Nom.	kW		602 (1)	739 (1)	821 (1)	866 (1)	981 (1)	1,034 (1)	1,229 (1)	1,302 (1)	1,374 (1)	1,424 (1)	1,476 (1)	
Free cooling capacity	Nom.	kW		374 (2)	468 (2)	539 (2)	562 (2)	644 (2)	670 (2)	825 (2)	866 (2)	889 (2)	909 (2)	929 (2)	
Mechanical capacity		kW		228 (2)	271 (2)	282 (2)	304 (2)	337 (2)	364 (2)	404 (2)	435 (2)	486 (2)	515 (2)	547 (2)	
Air temperature for free cooling 100%		°C		-2.3	-1.9	-0.6	-1.5	-0.9	-1.7	0.7	-0.2	-1.1	-1.6	-2.3	
Power input	Cooling	Nom.	kW	263 (1) / 46.6 (2)	278 (1) / 56.2 (2)	299 (1) / 58.5 (2)	334 (1) / 63.1 (2)	368 (1) / 68.5 (2)	412 (1) / 74.4 (2)	403 (1) / 80.0 (2)	450 (1) / 87.5 (2)	466 (1) / 93.4 (2)	511 (1) / 103 (2)	556 (1) / 109 (2)	
Capacity control	Method			Stepless											
	Minimum capacity		%	12.5											
EER				2.29 (1) / 12.91 (2)	2.66 (1) / 13.17 (2)	2.75 (1) / 14.04 (2)	2.59 (1) / 13.71 (2)	2.67 (1) / 14.33 (2)	2.51 (1) / 13.89 (2)	3.05 (1) / 15.36 (2)	2.90 (1) / 14.87 (2)	2.95 (1) / 14.7 (2)	2.79 (1) / 13.85 (2)	2.66 (1) / 13.56 (2)	
ESEER				3.59	3.66	3.89	3.62	3.83	3.63	4.13	3.89	4.09	4.02	3.92	
Dimensions	Unit	Height	mm	2,565											
			Width	mm	2,480										
			Depth	mm	6,300	7,200	8,100	9,000	10,800	10,800	12,910	12,910	14,936		
Weight	Unit	kg	8,050	8,620	9,190	10,450	10,710	12,190	12,830	12,910	14,936				
		Operation weight	kg	8,795	9,390	9,995	11,459	11,719	13,566	14,806	14,886	14,936			
Water heat exchanger	Type	Single pass shell & tube													
		Water volume	l	741	771	808	1,012	1,372	1,965						
		Water flow rate	Cooling	Nom.	l/s	26.2 (1) / 26.2 (2)	32.1 (1) / 32.1 (2)	35.7 (1) / 35.7 (2)	37.6 (1) / 37.6 (2)	42.6 (1) / 42.6 (2)	44.9 (1) / 44.9 (2)	53.4 (1) / 53.4 (2)	56.6 (1) / 56.6 (2)	59.7 (1) / 59.7 (2)	61.9 (1) / 61.9 (2)
Water pressure drop	Cooling	Nom.	kPa	76 (1) / 115 (2)	97 (1) / 159 (2)	84 (1) / 167 (2)	93 (1) / 184 (2)	102 (1) / 225 (2)	113 (1) / 248 (2)	92 (1) / 219 (2)	103 (1) / 243 (2)	128 (1) / 282 (2)	137 (1) / 301 (2)	146 (1) / 321 (2)	
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler													
Compressor	Type	Asymm single screw													
	Quantity	2													
Fan	Type	Direct propeller													
	Quantity	20													
	Air flow rate	Nom.	l/s	38,935	46,722	54,508	62,295	73,011							
Speed		rpm	715												
Sound power level	Cooling	Nom.	dBA	92			94			95					
Sound pressure level	Cooling	Nom.	dBA	71	72			73			73				
Operation range	Water side	Cooling	Min.~Max.	°CDB	-8~15										
	Air side	Cooling	Min.~Max.	°CDB	-20~45										
Refrigerant	Type / GWP	R-134a / 1,430													
	Circuits	Quantity	2												
Refrigerant charge	Per circuit	kg/TCO _{Eq}	640/91.5	730/104.4	810/115.8	910/130.1	1070/153.0	1125/160.9	1240/177.3						
Piping connections	Evaporator water inlet/outlet (OD)	DN150PN16(168.3mm)			DN200PN16(219.1mm)			DN250PN16(273mm)							
Unit	Maximum starting current	A	598	611	648	912	960	1,016	1,059	1,072					
	Nominal running current (RLA)	Cooling	A	411	439	473	526	580	647	645	717	738	800	862	
	Maximum running current	A	462	493	542	585	649	708	783	847	901	954			
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400												

(1) Cooling: entering evaporator water temp. 16°C; leaving evaporator water temp. 10°C; ambient air temp. 35°C; full load operation. (2) Data is calculated at ambient air temperature 5°C, inlet water temperature 16°C.



EWAD-TZ screw inverter chiller High efficiency in comfort and process cooling

Why you should choose EWAD-TZ

Over 1,000 sites around the world with screw chillers installed is demonstrating that we will never stop developing the most advanced technology with highest quality level to offer the best chiller experience to our customers.

Benefits for the installer

- › Factory leak-tested and pre-charged
- › High serviceability
- › User-friendly smart controls which can be integrated easily with building management systems

Benefits for the consultant

- › Multiple options available, e.g. rapid restart, variable speed water pumps, smart energy meter, EC fans
- › Ideal for both new and retrofit projects: same footprints of non-inverter unit with higher efficiencies and performance

Benefits for the end user

- › Rapid payback of three years for comfort cooling applications
- › 50% reduction of energy consumption
- › Designed for sound-sensitive environments

High efficiencies both at full load and part load

- › Daikin compressor with in-built inverter and Variable Volume Ratio (VVR) for optimized efficiency
- › In-house developed software with dynamic condensing pressure management and innovative economizer control logic

Rapid return on investment

- › Payback of three years, compared to a non-inverter unit for comfort cooling applications
- › Less than one year a for process cooling applications

Perfect comfort level

- › Infinitely variable load regulation
- › Precise leaving water temperature control thanks to stepless regulation

Compact design

- › More compact heat exchanger with superior efficiencies
- › Reduced electrical panel dimensions thanks to the inverter compressor mounted

Marketing tools

- › The new online chiller selection software will be available from April 16.

- › Video: www.youtube.com/DaikinEurope

- › Visit the mini-site: www.daikineurope.com/minisite/process-cooling-comfort-cooling-chiller-EWAD-TZ



Lowest sound levels


- › Down to 86 dB(A) sound power at full load and even lower at part load thanks to fans and compressors variable speed
- › Quiet compressor thanks to special acoustic executions
- › Unique Daikin fans design with reduced noise impact and vibrations

Unrivalled and proven reliability

- › Extensive testing in laboratories, Daikin factories and specific job sites
- › Reduced energy demand without compromising on reliability and performance

Extensive option list

- › Rapid restart after power failure
- › Variable speed water pumps
- › Integrated smart energy meter
- › EC fans

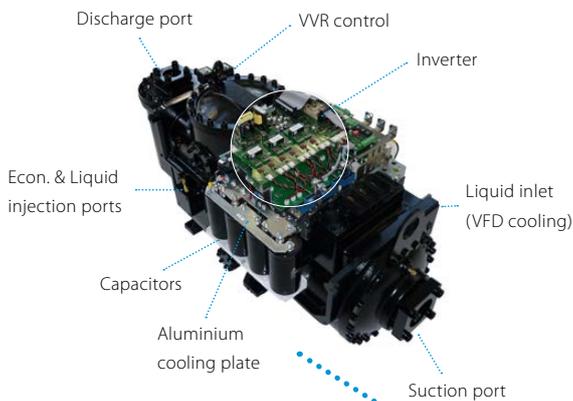

Air cooled screw inverter chiller

Standard efficiency

Standard/reduced sound

- › Optimized energy efficiency both at full and part load conditions
- › Stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability

Cooling only		EWAD-TZSS/SR		170	205	235	270	320	365	370	415	465	500	540	590	640	710					
Cooling capacity	Nom.	kW		170	205	229	268	317	365	366	412	463	499	536	589	640	710					
Power input	Cooling	Nom. kW		62.2	72.5	79.1	96.0	116	133	134	145	164	178	190	217	235	267					
Capacity control	Method	Stepless																				
	Minimum capacity	%		33.3	28.6	33.3	28.6	25.0	22.2	15.4	14.3	16.7	15.4	14.3	13.3	12.5	11.1					
EER					2.73	2.83	2.90	2.79	2.74			2.85	2.83	2.80	2.82	2.72	2.73	2.66				
ESEER					4.62	4.61	4.75	4.80	4.82	4.93	4.65	4.81	4.71	4.84	4.83	4.85	4.76	4.92				
Dimensions	Unit	Height	mm		2,270						2,222											
		Width	mm		1,224						2,258											
		Depth	mm		3,461	4,361	5,261			3,218			4,117			5,015	5,917					
Weight (SS)	Unit	kg		1,898	1,977	2,083	2,478	2,444	2,756	3,906	4,256	4,426	4,481	4,709	4,892	4,969	5,291					
	Operation weight	kg		1,915	2,077	2,183	2,504	2,596	2,806	3,995	4,426	4,590	4,645	4,873	5,162	5,231	5,553					
Weight (SR)	Unit	kg		1,996	2,075	2,181	2,576	2,541	2,854	4,101	4,452	4,621	4,676	4,904	5,087	5,164	5,486					
	Operation weight	kg		2,013	2,174	2,280	2,602	2,693	2,903	4,190	4,622	4,785	4,840	5,068	5,357	5,426	5,748					
Water heat exchanger	Type	Plate heat exchanger																				
	Water flow rate	Cooling	Nom.	l/s		8.1	9.8	11.0	12.8	15.1	17.4	17.5	19.7	22.1	23.9	25.6	28.2	30.6	34.0			
	Water pressure drop	Cooling	Total	kPa		25	24	29	33	26	27	36	50	33	37	43	36	47	57			
	Water volume	l		17	24	26	39	50	89	170	164			270	262							
Air heat exchanger	Type	High efficiency fin and tube type																				
Compressor	Type	Inverter driven single screw compressor																				
	Quantity	1								2												
Fan	Type	Direct propeller																				
	Quantity	3			4			5			6			8			10			12		
	Air flow rate	Cooling	Nom.	l/s		12,399	16,532	16,015	20,665	20,019	24,023	33,064			32,030	41,330	40,038	48,046				
	Speed	rpm		700																		
Sound power level (SS)	Cooling	Nom. dBA		96	97	96	97	98	101	99	100	99			100			101	104			
Sound power level (SR)	Cooling	Nom. dBA		89				90				92				93				95		
Sound pressure level (SS)	Cooling	Nom. dBA		77				78				80				79				80	81	84
Sound pressure level (SR)	Cooling	Nom. dBA		70	69	70	71	73			72			73			74					
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~47																
	Water side	Cooling	Min.~Max.	°CDB		-8~15																
Refrigerant	Type / GWP	R-134a / 1,430																				
	Circuits	Quantity		1								2										
Refrigerant charge	Per circuit	kg/TCO,Eq		29.0/41.5	35.0/50.1	39.0/55.8	46.0/65.8	54.0/77.2	62.0/88.7	31.0/44.3	35.0/50.1	39.5/56.5	42.5/60.8	45.5/65.1	50.0/71.5	54.5/77.9	60.5/86.5					
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm								114.3mm				139.7mm				168.3mm				
Unit	Starting current	Max		A																		
	Running current	Cooling	Nom.	A		105	121	132	159	191	218	223	241	273	294	314	359	385	434			
		Max		A		120	142	156	185	215	246	259	284	313	339	370	402	430	491			
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																		

Air cooled screw inverter chiller

High efficiency

Standard/reduced sound



Cooling only				EWAD-TZXS/XR																
				180	220	265	290	330	360	380	410	440	490	540	580	630	690			
Cooling capacity	Nom.	kW		180	216	265	288	332	360	366	407	441	490	536	577	629	682			
Power input	Cooling	Nom. kW		56.1	68.4	84.6	89.8	106	113	116	128	139	156	169	185	201	216			
Capacity control	Method	Stepless																		
	Minimum capacity	%		33.3	28.6	30.8	28.6	25.0	23.5	16.7	15.4	14.3	16.7	15.4	14.3	13.3	12.5			
EER					3.20	3.16	3.14	3.21	3.14	3.18	3.16	3.17	3.15	3.17	3.12	3.16				
ESEER					5.02	5.09	5.10	5.15	5.22	5.23	4.96	5.10	5.01	4.96	5.18	5.09	5.12	5.07		
Dimensions	Unit	Height	mm	2,270								2,222								
		Width	mm	1,224								2,258								
		Depth	mm	4,361	5,261	3,218	4,117				5,015				5,917	6,817				
Weight (XS)	Unit	kg		2,060	2,304	2,434	2,582	2,986	3,039	4,247	4,321	4,704	4,706	4,882	5,185	5,275	5,588			
	Operation weight	kg		2,081	2,404	2,586	2,734	3,035	3,088	4,417	4,479	4,864	5,152	5,455	5,537	5,843				
Weight (XR)	Unit	kg		2,158	2,402	2,532	2,679	3,084	3,136	4,442	4,516	4,901	5,077	5,381	5,471	5,783				
	Operation weight	kg		2,178	2,502	2,684	2,831	3,133	3,186	4,612	4,674	5,059	5,347	5,651	5,733	6,038				
Water heat exchanger	Type	Plate heat exchanger																		
	Water flow rate	Cooling	Nom.	l/s	8.6	10.4	12.7	13.8	15.9	17.2	17.5	19.5	21.1	23.5	25.7	27.6	30.1	32.7		
		Water pressure drop	Cooling	Total	kPa	24	25	19	22	23	26	40	41	48	56	30	34	44	57	
Water volume			l	20	24	39	50				170	158	270		262	255				
Air heat exchanger	Type	High efficiency fin and tube type																		
Compressor	Type	Inverter driven single screw compressor																		
	Quantity					1								2						
Fan	Type	Direct propeller																		
	Quantity	4		5		6		8				10		12		14				
	Air flow rate	Nom.		l/s		16,015	20,665	20,019	24,023	33,064	32,030	33,064	32,030	41,330	40,038	49,597	48,046	56,053		
Sound power level (XS)	Cooling	Nom.	dBA	700																
				96	97	96	97	98	99				100	99	100		101			
Sound power level (XR)	Cooling	Nom.	dBA	89				91	92				93		94					
				77				78	80	79	80		79		80					
Sound pressure level (XS)	Cooling	Nom.	dBA	72																
				69	70	69	70	71					72				73			
Operation range	Air side	Cooling	Min.-Max.	°CDB	-18~-49															
	Water side	Cooling	Min.-Max.	°CDB	-8~-15															
Refrigerant	Type / GWP	R-134a / 1,430																		
	Circuits	Quantity	1				2													
Refrigerant charge	Per circuit	kg/TCO _{Eq}		31.0/44.3	37.0/52.9	45.0/64.4	49.0/70.1	57.0/81.5	61.0/87.2	31.0/44.3	34.5/49.3	37.5/53.6	42.0/60.1	45.5/65.1	49.0/70.1	53.5/76.5	58.0/82.9			
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm				139.7mm				168.3mm										
Unit	Starting current	Max		3																
	Running current	Cooling	Nom.	A	97	116	142	151	179	190	199	217	235	262	284	310	338	361		
		Max		A	122	145	172	188	223	237	245	264	290	318	344	376	408	440		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																

Air cooled screw inverter chiller

Premium efficiency

Standard/reduced sound

- › Premium energy efficiency both at full and part load conditions
- › Stepless single-screw compressor
- › Optimised for use with R-134a
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



Cooling only		EWAD-TZPS/PR		190	225	250	270	295	320	345	380	415	460	505	560	600	645				
Cooling capacity	Nom.	kW		185	221	247	271	294	316	339	369	418	452	495	554	598	639				
Power input	Cooling	kW		52.7	64.9	69.2	77.4	85.1	94.4	102	110	123	134	146	168	183	200				
Capacity control	Method	Stepless																			
	Minimum capacity	%		33.3	28.6	33.3	30.8	28.6	26.7	18.2	16.7	15.4	14.3	16.7	15.4	14.3	13.3				
EER			3.52		3.41	3.57	3.50	3.45	3.35	3.34	3.36	3.38	3.39	3.38	3.30	3.28	3.20				
ESEER			5.49		5.45	5.73	5.66	5.65	5.62	5.46	5.40	5.59	5.54	5.67	5.66	5.55	5.47				
Dimensions	Unit	Height	mm		2,355																
		Width	mm		2,258																
		Depth	mm		3,218			4,117			5,015			5,917			6,817				
Weight (PS)	Unit	kg		2,436	2,565	2,810	2,815	3,026	3,031	4,290	4,517	4,764	5,007	5,241	5,269	5,489	5,591				
	Operation weight	kg		2,536	2,591	2,962	2,967	3,076	3,080	4,460	4,687	5,034	5,277	5,511	5,524	5,744	5,838				
Weight (PR)	Unit	kg		2,533	2,662	2,908	2,913	3,124	3,128	4,485	4,712	4,960	5,203	5,436	5,465	5,685	5,786				
	Operation weight	kg		2,633	2,688	3,060	3,065	3,173	3,178	4,655	4,882	5,230	5,473	5,706	5,720	5,940	6,033				
Water heat exchanger	Type	Plate heat exchanger																			
	Water flow rate	Cooling	Nom.	l/s		8.9	10.6	11.8	13.0	14.0	15.1	16.2	17.7	20.0	21.6	23.7	26.5	28.7	30.6		
	Water pressure drop	Cooling	Total	kPa		20	23	18	20	18	21	34	41	30	35	26	39	44	50		
	Water volume	l		24	26	39		50		170		270		255							
Air heat exchanger	Type	High efficiency fin and tube type																			
Compressor	Type	Inverter driven single screw compressor																			
	Quantity	1								2											
Fan	Type	Direct propeller																			
	Quantity	6				8				10				12				14			
	Air flow rate	Cooling	Nom.	l/s		20,172	19,284	26,896		25,712		33,621	32,140	40,345	38,568		47,069	44,996			
	Speed	rpm		600																	
Sound power level (PS)	Cooling	Nom.	96				97				99				100						
Sound power level (PR)	Cooling	Nom.	87				88				89				90						
Sound pressure level (PS)	Cooling	Nom.	77		76		77		79				78		79						
Sound pressure level (PR)	Cooling	Nom.	67		68		67		68		69										
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~-51															
	Water side	Cooling	Min.~Max.	°CDB		-8~-15															
Refrigerant	Type / GWP	R-134a / 1,430																			
	Circuits	Quantity		1								2									
Refrigerant charge	Per circuit	kg/TCO ₂ Eq		32.0/45.8	38.0/54.3	42.0/60.1	46.0/65.8	50.0/71.5	54.0/77.2	29.0/41.5	31.5/45.0	35.5/50.8	38.5/55.1	42.0/60.1	47.0/67.2	51.0/72.9	54.5/77.9				
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm								139.7mm				168.3mm							
	Unit	Starting current	Max		A																
		Running current	Cooling	Nom.	A		87	105	113	125	137	153	168	180	201	215	238	269	290	321	
		Max		A		115	135	151	164	177	193	209	230	249	271	299	325	352	384		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																	

Air cooled mini inverter heat pump

- › Inverter technology to ensure low sound values and leader-of-class ESEER
- › Wide operating range
- › Easy Plug & Play installation
- › Single phase power supply and low starting currents make the unit ideal for residential applications
- › Built-in hydronic module: no buffer tank required and a standard pump and main switch are included



Heating & Cooling		EWYQ-ADVP			005	006	007	
Cooling capacity	Nom.				kW	5.3 (1)	6.1 (1)	7.2 (1)
Heating capacity	Nom.				kW	6.02 (2) / 5.57 (3)	6.72 (2) / 6.27 (3)	8.18 (2) / 7.67(3)
Power input	Cooling	Nom.			kW	1.94 (1)	2.40 (1)	3.00 (1)
	Heating	Nom.			kW	1.65 (2) / 2.02 (3)	1.89 (2) / 2.29 (3)	2.41 (2) / 2.88(3)
Capacity control	Method				Inverter controlled			
EER					2.72 (1)	2.53 (1)	2.39 (1)	
COP					3.65 (2) / 2.76 (3)	3.58 (2) / 2.74 (3)	3.39 (2) / 2.66 (3)	
Space heating	Average climate water outlet 35°C	General	η _s (Seasonal space heating efficiency)	%	133			
					SCOP	3.39	3.40	3.41
						Seasonal space heating eff. class		
Dimensions	Unit	Height				mm	805	
		Width				mm	1,190	
		Depth				mm	360	
Weight	Unit				kg	100		
		Operation weight			kg	104		
Water heat exchanger	Type				Brazed plate			
	Water flow rate	Cooling	Nom.	l/min	15	17	20	
Heating		Nom.	l/min	18	20	24		
Air heat exchanger	Type				Tube type			
Hydraulic components	Expansion vessel	Volume			l			
					6			
Compressor	Type				Hermetically sealed swing compressor			
	Quantity				1			
Fan	Type				Propeller fan			
	Quantity				1			
Sound power level	Cooling	Nom.			dBA	62	63	
Sound pressure level	Cooling	Nom.			dBA	48	50	
		Heating	Nom.			dBA	48	49
Operation range	Air side		Cooling	Min.~Max.	°CDB	10~43		
		Heating	Min.~Max.	°CDB	-15~25			
	Water side	Cooling	Min.~Max.	°CDB	5~20			
		Heating	Min.~Max.	°CDB	25~50			
Refrigerant	Type / GWP				R-410A / 2,087.5			
	Circuits	Quantity			1			
	Control				Inverter			
Refrigerant charge	Per circuit			kg/TCO,Eq	1.7 / 3.5			
Water circuit	Piping connections diameter				inch	1" MBSP		
Piping connections	Water heat exchanger drain				5/16 SAE flare			
Unit	Running current	Max			A	19.0		
Power supply	Phase/Frequency/Voltage				Hz/V	1~/50/230		

(1) Tamb 35°C - LWE 7°C (DT=5°C) (2) DB/WB 7°C/6°C - LWC 35°C (DT=5°C) (3) DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)

Air cooled mini inverter heat pump

- › Inverter technology to ensure low sound values and leader-of-class ESEER
- › Wide operating range
- › Built-in hydronic module: no buffer tank required and a standard pump and main switch are included
- › Easy Plug & Play installation
- › Single phase power supply for residential applications, three phase power supply model available for light commercial applications



Heating & Cooling					EWYQ	009ACV3	010ACV3	011ACV3	009ACW1	011ACW1	013ACW1	
Cooling capacity	Nom.			kW	12.2 (1)/ 8.60 (2)	13.6 (1)/ 9.60 (2)	15.7 (1)/ 11.1 (2)	12.9 (1)/ 9.10 (2)	15.7 (1)/ 11.1 (2)	17.0 (1)/ 13.3 (2)		
Heating capacity	Nom.			kW	10.2 (1)/ 9.90 (2)	11.7 (1)/ 11.4 (2)	13.8 (1)/ 12.9 (2)	11.20 (1)/ 10.90 (2)	13.2 (1)/ 12.4 (2)	14.8 (1)/ 13.9 (2)		
Power input	Cooling	Nom.		kW	2.85 (1)/ 2.83 (2)	3.41 (1)/ 3.28 (2)	4.13 (1)/ 3.90 (2)	3.08 (1)/ 3.05 (2)	4.13 (1)/ 3.90 (2)	5.52 (1)/ 5.18 (2)		
	Heating	Nom.		kW	2.43 (1)/ 2.99 (2)	2.81 (1)/ 3.46 (2)	3.20 (1)/ 3.94 (2)	2.69 (1)/ 3.31 (2)	3.07 (1)/ 3.78 (2)	3.47 (1)/ 4.27 (2)		
Capacity control	Method		Inverter controlled									
EER					4.27 (1)/ 3.05 (2)	4.00 (1)/ 2.93 (2)	3.79 (1)/ 2.85 (2)	4.19 (1)/ 2.99 (2)	3.79 (1)/ 2.85 (2)	3.08 (1)/ 2.57 (2)		
ESEER					4.31	4.30	4.33	4.43	4.44	4.36		
COP					4.19 (1)/ 3.30 (2)	4.17 / (1) 3.29 (2)	4.30 (1)/ 3.27 (2)	4.17 (1)/ 3.28 (2)	4.31 (1)/ 3.27 (2)	4.28 (1)/ 3.25 (2)		
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	Inverter controlled							
					126	131	134	126	134	130		
					SCOP	3.22	3.34	3.41	3.22	3.41	3.30	
			Seasonal space heating eff. class	A+								
Dimensions	Unit	Height	mm		1,435							
			mm		1,420							
			mm		382							
Weight	Unit			kg								
Water heat exchanger	Type		Brazed plate									
	Quantity		1									
	Water flow rate	Heating	Nom.	l/min	28.3	32.6	36.9	31.2	35.5	39.8		
	Water volume				l							
					1.01							
Air heat exchanger	Type		Hi-XSS									
Pump Standard	Nominal ESP unit	Cooling		kPa	60.5	57.8	53.2	59.2	53.2	40.9 / 45.6		
		Heating		kPa	57.1	52.5	47.3	54.1	49.1	36.6 / 43.5		
Hydraulic components	Expansion vessel	Volume		l								
Compressor	Type		Hermetically sealed scroll compressor									
	Quantity		1									
Fan	Type		Propeller fan									
	Quantity		2									
	Air flow rate	Cooling	Nom.	m³/min	96.0	100	97.0					
		Heating	Nom.	m³/min		90.0						
Fan motor	Speed	Cooling	Nom.	rpm	780							
		Heating	Nom.	rpm	760							
		Steps		8								
Sound power level	Cooling	Nom.	dBA		64				64		66	
	Heating	Nom.	dBA		60	64	60	60				
Sound pressure level	Cooling	Nom.	dBA		50							
	Heating	Nom.	dBA		50							
	Night quiet mode	Cooling	dBA		45				45		46	
		Heating	dBA		42				42		43	
Operation range	Air side	Cooling	Min.-Max.	°CDB	10~46							
		Heating	Min.-Max.	°CDB	-15~35							
	Water side	Cooling	Min.-Max.	°CDB	5~20							
		Heating	Min.-Max.	°CDB	30~50							
Refrigerant	Type/GWP		R-410A/2,087.5									
	Circuits	Quantity		1								
	Control		Electronic expansion valve									
Refrigerant charge	Per circuit		kg/TCO,Eq		2.95 / 6.16							
Water circuit	Piping		inch		5/4"							
	Piping connections diameter		inch		G 5/4" (female)							
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/230				3N~/50/400			

(1) Underfloor program: cooling Ta 35°C - LWE 18°C (Dt: 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (Dt: 5°C) (2) Fan coil program: cooling Ta 35°C - LWE 7°C (Dt: 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (Dt: 5°C)

Air cooled scroll inverter heat pump

- › High efficiency with **leader-of-class ESEER**
- › Minimal starting currents and short payback times
- › No buffertank required for standard applications
- › **Large operation range** (ambient temperature up to 43°C)
- › A modbus gateway (RTD-W) can be installed per unit in order allow the control and monitoring by a Daikin controller or a third-party BMS, which will increase further the efficiency of the system
- › All systems that are connected with RTD-W can be controlled and **monitored centrally** with the master/slave control kit: the sequencing controller EKCC-W



Heating & Cooling					EWYQ-BAWN/BAWP	016	021	025	032	040	050	064							
Cooling capacity	Nom.			kW	17.4(1)/16.6(2)	21.7(1)/20.7(2)	25.8(1)/24.7(2)	32.3(1)/30.9(2)	43.4(1)/41.5(2)	51.8(1)/49.7(2)	64.5(1)/62.3(2)								
Heating capacity	Nom.			kW	16.2(1)/17.00(2)	20.3(1)/21.30(2)	24.6(1)/25.70(2)	30.7(1)/32.10(2)	40.6(1)/42.50(2)	49.0(1)/51.10(2)	61.5(1)/63.70(2)								
Power input	Cooling	Nom.		kW	5.60(1)/5.80(2)	7.25(1)/7.59(2)	9.29(1)/9.74(2)	13.0(1)/13.5(2)	14.7(1)/15.4(2)	18.8(1)/19.7(2)	26.4(1)/27.4(2)								
	Heating	Nom.		kW	5.53(1)/5.73(2)	7.10(1)/7.44(2)	8.91(1)/9.36(2)	10.6(1)/11.1(2)	14.0(1)/14.7(2)	17.6(1)/18.5(2)	20.7(1)/21.7(2)								
Capacity control	Method				Inverter controlled														
	Minimum capacity			%	25														
EER					3.11(1)/2.86(2)	2.99(1)/2.73(2)	2.78(1)/2.54(2)	2.48(1)/2.29(2)	2.95(1)/2.69(2)	2.76(1)/2.52(2)	2.44(1)/2.27(2)								
ESEER					4.33(1)/4.21(2)	4.08(1)/4.18(2)	3.85(1)/4.04(2)	3.39(1)/3.62(2)	4.19(1)/4.24(2)	3.96(1)/4.12(2)	3.64(1)/3.78(2)								
COP					2.93(1)/2.97(2)	2.86(1)/2.86(2)	2.76(1)/2.75(2)	2.90(1)/2.89(2)		2.78(1)/2.76(2)	2.97(1)/2.94(2)								
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	130(1)/133(2)														
					126(1)/126(2)														
					130(1)/121(2)														
SCOP	Seasonal space heating eff. class				3.33(1)/3.39(2)		3.22(1)/3.22(2)		3.32(1)/3.09(2)		3.08(1)/3.06(2)								
					A+(1)/A+(2)		A+(1)/A(2)		A(1)/A(2)		A+(1)/A+(2)		A+(1)/A(2)						
					A(1)/A(2)		A(1)/A(2)		A(1)/A(2)		A(1)/A(2)		A(1)/A(2)						
Dimensions	Unit	Height	Width	Depth	mm														
					1,684														
					1,370														
Weight	Unit	Operation weight	kg																
			774																
			320																
Water heat exchanger	Type	Braze plate																	
		Water flow rate	Cooling	Nom.	l/min	50.0		62.0		74.0		93.0		124		148		185	
						Heating	Nom.	l/min	46.0		58.0		71.0		88.0		116		140
		Water pressure drop	Cooling	Total	kPa				20		30		42		30		42		30
						Water volume		l	1.90							2.90		3.80	
Hi-XSS																			
Air heat exchanger	Type	Hermetically sealed scroll compressor																	
		Quantity	1		2		3		4		6								
Fan	Type		Axial																
		Quantity	1							2		4							
			Air flow rate	Cooling	Nom.	m³/min	171		185		233		370		466				
Heating	Nom.						m³/min	171		185		233		370		466			
		Sound power level	Cooling	Nom.	dB(A)	78.0							80.0		81.0		83.0		
Operation range	Air side					Cooling	Min.~Max.	°CDB	-5~43							-15~35			
									Heating	Min.~Max.	°CDB								-10~20
Water side	Cooling					Min.~Max.	°CDB												
		Heating	Min.~Max.	°CDB															
Refrigerant	Type / GWP				R-410A / 2,087.5														
		Circuits	Quantity	1															
				Electronic expansion valve															
Refrigerant charge	Per circuit			kg / TCO ₂ eq	7.6 / 15.9		9.6 / 20.0		15.2 / 31.7		19.2 / 40.1								
Water circuit	Piping	inch																	
		1-1/4"																	
Unit	Piping connections diameter	inch																	
		1-1/4" (female)																	
Starting current	Max	A	0.00		77.7		78.7		88.7		99.8		121						
			22.2		25.3		26.4		35.2		47.4		67.2						
Running current	Max	A	Hz/V																
			3N~/50/400																

(1) EWYQ-BAWN: Version without pump (2) EWYQ-BAWP: Version with pump

Air cooled scroll inverter heat pump, split version

- › **Hydronic module for indoor installation** eliminating the need for glycol
- › **Ideal for colder climates** as the lack of glycol will allow for high efficiencies
- › Compact dimensions and limited pipework allow for **installation in very restricted spaces**
- › Easy transportation as separate units will fit in an elevator



Heating & Cooling					SEHVX20AAW/ SERHQ20AAW1	SEHVX32AAW/ SERHQ32AAW1	SEHVX40AAW/ SERHQ20AAW1+SERHQ20AAW1	SEHVX64AAW/ SERHQ32AAW1+SERHQ32AAW1	
Cooling capacity	Nom.			kW	20.7	30.9	41.5	62.3	
Heating capacity	Nom.			kW	21.3 (1)/ 21.3 (2)	32.1 (1)/ 32.1 (2)	42.5 (1)/ 42.5 (2)	63.7 (1)/ 63.7(2)	
Power input	Cooling	Nom.		kW	7.59	13.5	15.4	27.4	
	Heating	Nom.		kW	6.12 (1)/ 7.44 (2)	8.72 (1)/ 11.1 (2)	12.0 (1)/ 14.7 (2)	16.9 (1)/ 21.7 (2)	
EER					2.73	2.29	2.69	2.27	
COP					3.48 (1)/2.86 (2)	3.68 (1)/ 2.89 (2)	3.54 (1)/ 2.89 (2)	3.77 (1)/ 2.94 (2)	
Space heating	Average climate water outlet 35°C	General	SCOP	%	3.22	3.06	3.22	3.05	
			ηs (Seasonal space heating efficiency)	%	126	119	126	120	
			Seasonal space heating eff. class		A+	A	A+	A	
Unit for indoor installation					SEHVX-AAW	SEHVX20AAW	SEHVX32AAW	SEHVX40AAW	SEHVX64AAW
Dimensions	Unit	Height			mm	1,573			
		Width			mm	766			
		Depth			mm	396			
Weight	Unit			kg	60	62	64	66	
	Packed unit			kg	70	72	74	76	
Sound power level	Nom.			dBA	63				
Operation range	Heating	Ambient	Min.~Max.	°C~°CDB	-15~35				
		Water side	Min.~Max.	°C	25~50				
	Indoor installation	Ambient	Min.	°CDB	5				
			Max.	°CDB	35				
	Cooling	Ambient	Min.~Max.	°CDB	-5~43				
Water side		Min.~Max.	°C	5~20					
Refrigerant	Type / GWP				R-410A / 2,087.5				
	Circuits	Quantity			1				
	Control				Electronic expansion valve				
Water circuit	Piping connections diameter				inch	G 1"1/4 (female)		G 2" (female)	
	Piping				inch	1-1/4"		1-1/2"	
	Water pressure drop	Cooling	Nom.	kPa	176	151	231	141	
		Heating	Nom.	kPa	174	149	229	139	
Total water volume				l	3.2	4.2	5.8	7.7	
Water side Heat exchanger	Type				Brazed plate				
	Water volume				l	1.9	2.9	3.8	5.7
	Water flow rate	Heating	Nom.	l/min	61	92	122	183	
Cooling		Nom.	l/min	59	89	119	179		
Current	Maximum running current	Cooling	A	5.54	5.64		7.24		
		Heating	A	5.54	5.64		7.24		
Power supply	Phase/Frequency/Voltage				Hz/V	3N~/50/400			
Outdoor Unit					SERHQ-AAW1	SERHQ20AAW1	SERHQ32AAW1		
Dimensions	Unit	Height			mm	1,680			
		Width			mm	930			
		Depth			mm	765			
Weight	Unit			kg	240.00				
	Packed unit			kg	273.00				
Compressor	Quantity					2			
	Type					Hermetically sealed scroll compressor			
Fan	Type					Propeller fan			
	Quantity					1			
Air flow rate	Cooling	Nom.	m³/min	185		233			
		Heating	Nom.	m³/min	185		233		

(1) Heating Ta DB/WB 7/6°C - LWC 35°C (DT=5°C) (2) Heating Ta DB/WB 7/6°C - LWC 45°C



Air cooled multi-scroll heat pump

High efficiency
Standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Compact design to allow easy indoor installation or retrofit operations
- › Partial and total heat recovery option available
- › Stainless steel plate heat exchanger

Heating & Cooling		EWYQ-G-XS		075	085	100	110	120	140	160		
Cooling capacity	Nom.	kW		77.8	88.1	101	117	127	147	165		
Heating capacity	Nom.	kW		82.2	91.2	110	127	138	156	170		
Power input	Cooling	Nom.	kW		27.0	31.5	36.0	39.5	44.7	50.2	57.8	
	Heating	Nom.	kW		26	29	34	39	43	50	54	
Capacity control	Method		Step									
	Minimum capacity		%		50	44	50	44	50	43	50	
EER				2.88	2.80	2.81	2.97	2.84	2.92	2.85		
ESEER				3.90	3.94	3.97	4.03	3.92	3.96			
COP				3.14	3.12	3.24	3.25	3.20	3.11	3.13		
Space heating 	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency) SCOP	%		131	129	142	140	142	138	140
						3.35	3.31	3.62	3.58	3.63	3.53	3.58
Dimensions	Unit	Height		mm		1,800						
		Width		mm		1,195						
		Depth		mm		2,826		3,426		4,026		
Weight	Unit	kg		850	912	1,077	1,183	1,213	1,333	1,394		
		Operation weight		kg		858	921	1,088	1,194	1,224	1,344	1,411
Water heat exchanger	Type		Brazen plate									
	Water flow rate	Cooling	Nom.	l/s		3.7	4.2	4.8	5.6	6.1	7.0	7.9
		Heating	Nom.	l/s		4.0	4.4	5.3	6.1	6.7	7.5	8.2
	Water pressure drop	Cooling	Nom.	kPa		8.40	8.30	8.70	11.6	13.7	18.2	19.9
		Heating	Nom.	kPa		9.50	9.10	11.20	14.40	17.20	21.70	22.50
Water volume		l		8.10	9.40	10.8				16.7		
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler									
Compressor	Type		Scroll compressor									
	Quantity		2									
Fan	Type		Direct propeller									
	Quantity		6		8		10					
	Air flow rate	Nom.	l/s		10,042	9,861	13,148		16,435			
Speed		rpm		1,360								
Sound power level	Cooling	Nom.	dBA		84	85	87	89				
Sound pressure level	Cooling	Nom.	dBA		66	68	70	71				
Operation range	Air side	Cooling	Min.~Max.	°CDB		-10~45						
	Water side	Cooling	Min.~Max.	°CDB		-10~15						
Refrigerant	Type / GWP		R-410A / 2,087.5									
	Circuits		Quantity		1							
Refrigerant charge	Per circuit		kg/TCO,Eq		15.0 / 31.3	18.0 / 37.6	23.0 / 48.0		30.0 / 62.6			
Piping connections	Evaporator water inlet/outlet (OD)		2" 1/2									
Unit	Starting current		Max		A	210	261	267	316	323	363	377
	Running current	Cooling	Nom.	A		52	56	60	69	76	88	95
		Max		A		66	72	78	87	95	111	125
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400							

Air cooled multi-scroll heat pump

High efficiency

Reduced sound



Heating & Cooling					EWYQ-G-XR	075	085	100	110	120	140	160
Cooling capacity	Nom.			kW	75.2	84.5	95.0	111	120	139	155	
Heating capacity	Nom.			kW	82.2	91.2	110	127	138	156	170	
Power input	Cooling	Nom.		kW	27.7	32.7	38.6	41.5	47.4	52.8	61.5	
	Heating	Nom.		kW	26	29	34	39	43	50	54	
Capacity control	Method				Step							
	Minimum capacity			%	50	44	50	44	50	43	50	
EER					2.71	2.59	2.46	2.68	2.52	2.64	2.51	
ESEER					3.85	3.90	3.79	3.92	3.76	3.86	3.79	
COP					3.14	3.12	3.24	3.25	3.20	3.11	3.13	
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	131	129	142	140	142	138	140	
					SCOP	3.35	3.31	3.62	3.58	3.63	3.53	3.58
Dimensions	Unit	Height	mm		1,800							
		Width	mm		1,195							
		Depth	mm		2,826		3,426		4,026			
Weight	Unit	Operation weight		kg	880	942	1,107	1,213	1,243	1,363	1,424	
				kg	888	951	1,118	1,224	1,254	1,374	1,441	
Water heat exchanger	Type			Braze plate								
	Water flow rate	Cooling	Nom.	l/s	3.6	4.0	4.5	5.3	5.7	6.7	7.4	
		Heating	Nom.	l/s	4.0	4.4	5.3	6.1	6.7	7.5	8.2	
	Water pressure drop	Cooling	Nom.	kPa	7.90	7.70	7.60	10.5	12.1	16.4	17.5	
		Heating	Nom.	kPa	9.50	9.10	11.2	14.4	17.2	21.7	22.5	
Water volume				l	8.10	9.40	10.8					16.7
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler								
Compressor	Type			Scroll compressor								
	Quantity			2								
Fan	Type			Direct propeller								
	Quantity			6			8			10		
	Air flow rate	Nom.		l/s	7,859		7,101	9,468		11,835		
Speed				rpm	1,108							
Sound power level	Cooling	Nom.		dB(A)	80	82	84	86			67	
Sound pressure level	Cooling	Nom.		dB(A)	62	65	66	68			67	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-10~45							
	Water side	Cooling	Min.~Max.	°CDB	-10~15							
Refrigerant	Type / GWP			R-410A / 2,087.5								
	Circuits			Quantity	1							
Refrigerant charge	Per circuit			kg/TCO _{Eq}	15 / 31.3		18 / 37.6	15 / 48.0		15 / 62.6		
Unit	Starting current		Max	A	210	261	267	316	323.0	363	377	
	Running current	Cooling	Nom.	A	54	60	65	71	80	90	103	
		Max		A	66	72	78	87	95	111	125	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400							

Air cooled multi-scroll heat pump

High efficiency

Standard/low sound

› **Class A efficiency in heating mode**

- › Extended operation range: ambient temperatures from -10°C up to +46°C in cooling mode and down to -17°C in heating mode
- › 2 truly independent refrigerant circuits
- › Reduced footprint thanks to the **V-shaped frame** (EWYQ160-230F-XS/XL & EWYQ160-220F-XR)
- › Reliable and efficient scroll compressors with **high EER values**
- › Chiller series design entirely based on new European directives (EN14511, EN14825)
- › Top serviceability level thanks to reduced weight, compact footprint and optimized components accessibility

- › The unit can be equipped with a hydraulic module optimizing installation time, space and cost
- › Wide range of available options and accessories
- › Inverter fans management for enhanced part load efficiencies
- › Nordic kit option to improve the chiller working conditions in heating mode
- › MicroTech III controller with superior control logic and easy interface

Heating & Cooling				EWYQ-F-XS/XL																
Cooling capacity				Nom.	160	190	210	230	310	340	380	400	430	510	570	630				
Heating capacity				Nom.	173	197	227	254	329	362	404	429	463	535	607	674				
Power input				Cooling	Nom.	57.6	63.3	70.3	79.3	102	114	129	138	145	172	195	214			
Heating				Nom.	54.0	61.6	70.5	79.2	101	113	126	133	140	167	190	210				
Capacity control				Method	Step															
Minimum capacity				%	25.0									17.0						
EER					2.84	2.91	2.92		2.99	2.93	2.91	2.90	2.94	2.92	2.90	2.91				
ESEER					3.73	3.89	3.81	3.71	4.07	4.19	3.99	3.96	4.14	4.20	3.98	4.06				
COP					3.20		3.22	3.21	3.24	3.21		3.23	3.30	3.21	3.20	3.21				
Space heating				Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)		SCOP		%	128	134	129		143	147	-			
						3.28	3.42	3.31	3.30	3.64	3.75	-								
Dimensions				Unit	Height	2,270				2,220										
					Width	1,200				2,258										
					Depth	4,370		5,270		4,125		5,025		5,925		6,825				
Weight (XS)				Unit	kg	1,430	1,850	2,300	2,350	2,900	2,910	2,920	3,730	3,750	4,250	4,280	4,670			
					Operation weight	kg	1,470	1,890	2,340	2,390	2,980	2,990	3,000	3,840	3,850	4,370	4,400	4,780		
Weight (XL)				Unit	kg	1,520	1,940	2,400	2,440	3,060	3,070	3,080	3,890	3,900	4,400	4,440	4,820			
					Operation weight	kg	1,570	1,980	2,440	2,480	3,130	3,150	3,160	3,990	4,010	4,520	4,550	4,940		
Water heat exchanger				Type	Plate heat exchanger															
				Water flow rate	Cooling	Nom.	l/s	7.8	8.8	9.8	11.1	14.6	16.0	18.0	19.2	20.4	24.0	27.1	29.9	
					Heating	Nom.	l/s	8.3	9.5	10.9	12.2	15.9	17.5	19.5	20.7	22.3	25.8	29.3	32.5	
				Water pressure drop	Cooling	Nom.	kPa	22	28	36	40	21	27	30	29	34	37	42	56	
					Heating	Nom.	kPa	25	32	43	50	25	31	37	33	40	43	50	66	
				Water volume	l	18				44		60		70						
Air heat exchanger				Type	High efficiency fin and tube type with integral subcooler															
Compressor				Type	Scroll compressor															
				Quantity	4									6						
Fan				Type	Direct propeller															
				Quantity	4			5		8			10		12		14			
				Air flow rate	Nom.	l/s	22,577	21,593	26,992		43,187			55,213	53,983	64,780		75,577		
				Speed	rpm	900														
Sound power level (XS)				Cooling	Nom.	dBa	92	94	95		97		98		99		100			
Sound power level (XL)				Cooling	Nom.	dBa	89	92	93		95			96		97		98		
Sound pressure level (XS)				Cooling	Nom.	dBa	72	74	75	76	77		78		79		80			
Sound pressure level (XL)				Cooling	Nom.	dBa	70	73		74	75			76		77				
Operation range				Air side	Cooling	Min.~Max.	°CDB										-10~-46			
					Heating	Min.~Max.	°CDB										-17~-20			
				Water side	Cooling	Min.~Max.	°CDB										-13~-15			
					Heating	Min.~Max.	°CDB										25~-50			
Refrigerant				Type / GWP	R-410A / 2,087.5															
				Circuits	Quantity	2														
Refrigerant charge				Per circuit	kg/TCO,Eq	16.0/33.4	20.0/41.8		24.0/50.1	35.0/73.1	36.0/75.2	35.0/73.1	46.0/96.0		55.0/114.8	52.5/109.6	68.0/142.0			
Piping connections				Evaporator water inlet/outlet (OD)	2.5"															
				Unit	Starting current	Max	A	282	536	353	560	600	516	637	659	666	648	787	827	
					Running current	Cooling	Nom.	A	115	140	128	162	193	205	235	251	257	307	353	384
						Max	A	138	165	164	196	246	264	295	316	330	396	442	491	
Power supply				Phase/Frequency/Voltage	Hz/V	3~/50/400														

Air cooled multi-scroll heat pump

High efficiency
Reduced sound



EWYQ-F-XS/XL/XR

MicroTech III

Heating & Cooling				EWYQ-F-XR													
				160	180	200	220	300	330	360	390	420	490	550	610		
Cooling capacity	Nom.			kW													
Heating capacity	Nom.			kW													
Power input	Cooling	Nom.	kW														
	Heating	Nom.	kW														
Capacity control	Method	Step															
	Minimum capacity			25.0									17.0				
EER			2.81 2.86 2.92 2.87 3.04 2.93 2.86 2.90 2.93 2.91 2.85 2.89														
ESEER			4.33 4.39 4.38 4.19 4.63 4.68 4.37 4.44 4.60 4.83 4.50 4.62														
COP			3.20 3.22 3.21 3.24 3.21 3.23 3.30 3.21 3.20 3.21														
Space heating	Average climate water outlet 35°C	General	η _s (Seasonal space heating efficiency) SCOP			128 134		129		143 147		-					
						3.28 3.42		3.31 3.30		3.64 3.75		-					
Dimensions	Unit	Height			2,270						2,220						
		Width			1,200						2,258						
		Depth			4,370		5,270		4,125		5,025		5,925		6,825		
Weight	Unit			kg													
	Operation weight			kg													
Water heat exchanger	Type	Plate heat exchanger															
		Water flow rate	Cooling	Nom.	l/s												
			Heating	Nom.	l/s												
		Water pressure drop	Cooling	Nom.	kPa												
			Heating	Nom.	kPa												
Water volume			l														
Air heat exchanger	High efficiency fin and tube type with integral subcooler																
Compressor	Type	Scroll compressor															
	Quantity	4									6						
Fan	Type	Direct propeller															
	Quantity			4		5		8		10		12		14			
	Air flow rate	Nom.	l/s														
	Speed			rpm													
Sound power level	Cooling	Nom.	dBA														
Sound pressure level	Cooling	Nom.	dBA														
Operation range	Air side	Cooling	Min.~Max.	°CDB													
		Heating	Min.~Max.	°CDB													
	Water side	Cooling	Min.~Max.	°CDB													
		Heating	Min.~Max.	°CDB													
Refrigerant	Type / GWP	R-410A / 2,087.5															
	Circuits			Quantity													
Refrigerant charge	Per circuit			kg/TCO ₂ Eq													
Piping connections	Evaporator water inlet/outlet (OD)		2.5"						3"								
Unit	Starting current	Max		A													
	Running current	Cooling	Nom.	A													
		Max		A													
Power supply	Phase/Frequency/Voltage		Hz/V														

Air cooled screw inverter heat pump

Standard efficiency

Standard sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control

Heating & Cooling				EWYD-BZSS												
				250	270	290	320	340	370	380	410	440	460	510	520	580
Cooling capacity	Nom.			kW												
Heating capacity	Nom.			kW												
Power input	Cooling	Nom.		kW												
	Heating	Nom.		kW												
Capacity control	Method			Stepless												
	Minimum capacity			%												
EER				2.77	2.70	2.65	2.75	2.69	2.68	2.63	2.66	2.62	2.79	2.76	2.74	2.67
ESEER				3.93	3.92	3.89	3.95	3.89	3.90	3.82	3.91	3.89	4.18	4.01		3.93
COP				2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	2.99	3.01	2.97
Space heating 	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency) SCOP	%												
				125												
Dimensions	Unit	Height	mm													
		Width	mm													
		Depth	mm													
Weight	Unit	Operation weight			kg											
		Type			Single pass shell & tube											
Water heat exchanger	Water flow rate	Cooling	Nom.	l/s												
		Heating	Nom.	l/s												
	Water pressure drop	Cooling	Nom.	kPa												
		Heating	Nom.	kPa												
	Water volume				l											
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler												
Compressor	Type			Single screw compressor												
Fan	Quantity			2												
	Type			Direct propeller												
	Quantity			6												
	Air flow rate	Nom.		l/s												
	Speed			rpm												
Sound power level	Cooling	Nom.		dB(A)												
Sound pressure level	Cooling	Nom.		dB(A)												
Operation range	Air side	Cooling	Min.~Max.	°CDB												
		Heating	Min.~Max.	°CDB												
	Water side	Cooling	Min.~Max.	°CDB												
		Heating	Min.~Max.	°CDB												
Refrigerant	Type / GWP			R-134a / 1,430												
Refrigerant charge	Circuits		Quantity	2												
	Per circuit			kg/TCO,Eq												
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm												
Unit	Starting current			A												
	Running current	Cooling	Nom.	A												
Power supply	Phase/Frequency/Voltage			Hz/V												
				3~/50/400												


Air cooled screw inverter heat pump

Standard efficiency

Low sound



Heating & Cooling					EWYD-BZSL													
					250	270	290	320	330	360	370	400	430	450	490	510	570	
Cooling capacity	Nom.		kW		247	265	290	315	330	353	370	401	423	446	490	507	565	
Heating capacity	Nom.		kW		271	298	325	334	350	380	412	445	465	477	533	561	618	
Power input	Cooling	Nom.		kW	89.5	99.5	110	115	123	134	144	151	163	158	177	186	216	
		Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	178	186	208
Capacity control	Method			Stepless														
	Minimum capacity			%	13.0						9.0							
EER					2.76	2.66	2.62	2.75	2.68	2.64	2.57	2.66	2.59	2.83	2.77	2.73	2.61	
ESEER					4.06	4.04	4.03	4.17	4.09	4.04	4.01	4.06	4.02	4.18	4.16	4.10	3.98	
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	2.99	3.01	2.97	
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	125						-							
					SCOP			3.21			3.20			3.21			-	
Dimensions	Unit	Height		mm	2,335						2,280							
		Width		mm	2,254													
		Depth		mm	3,547			4,428			5,329			6,659				
Weight	Unit		kg		3,750	3,795	3,840	4,210		4,280	4,350	4,730	5,525	6,005	6,245			
	Operation weight		kg		3,888	3,933	3,978	4,343		4,408	4,478	4,858	5,765	6,234	6,474	6,463		
Water heat exchanger	Type			Single pass shell & tube														
	Water flow rate	Cooling	Nom.		l/s	11.8	12.7	13.9	15.1	15.8	16.9	17.7	19.2	20.3	21.4	23.5	24.3	27.1
			Heating		Nom.		l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0	25.6
	Water pressure drop	Cooling	Nom.		kPa	38	44	42	48	53	57	62	71	77	45	82	87	58
			Heating		Nom.		kPa	30	35	52	37	40	45	51	59	64	42	63
Water volume				l	138			133			128			240		229		
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler														
Compressor	Type			Single screw compressor														
Quantity		2						3										
Fan	Type			Direct propeller														
	Quantity			6			8			10			12					
	Air flow rate	Cooling	Nom.		l/s	24,432	24,264	24,095	32,576		32,628	32,127	40,720	48,863	48,415	47,732	48,191	
Speed			rpm	700														
Sound power level	Cooling	Nom.		dB(A)	94			95						97				
Sound pressure level		Nom.		dB(A)	76						77							
Operation range	Air side	Cooling	Min.~Max.		°CDB	-10~45												
			Heating		Min.~Max.		°CDB	-10~20										
	Water side	Cooling	Min.~Max.		°CDB	-8~15												
			Heating		Min.~Max.		°CDB	35~55										
Refrigerant	Type / GWP			R-134a / 1,430														
Circuits		Quantity			2						3							
Refrigerant charge	Per circuit			kg/TCO _{Eq}	43.0/61.5	44.0/62.9	43.0/61.5	46.0/65.8	46.5/66.5		47.0/67.2	50.0/71.5		47.0/67.2		49.0/70.1		
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm														
Unit	Starting current		Max		A	145	146		176	199			217	231	234	288	311	305
	Running current	Cooling	Nom.		A	134	148	163	171	184	199	212	224	240	238	263	275	319
			Max		A	202	203		243	277			302	322	313	381	415	406
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400													

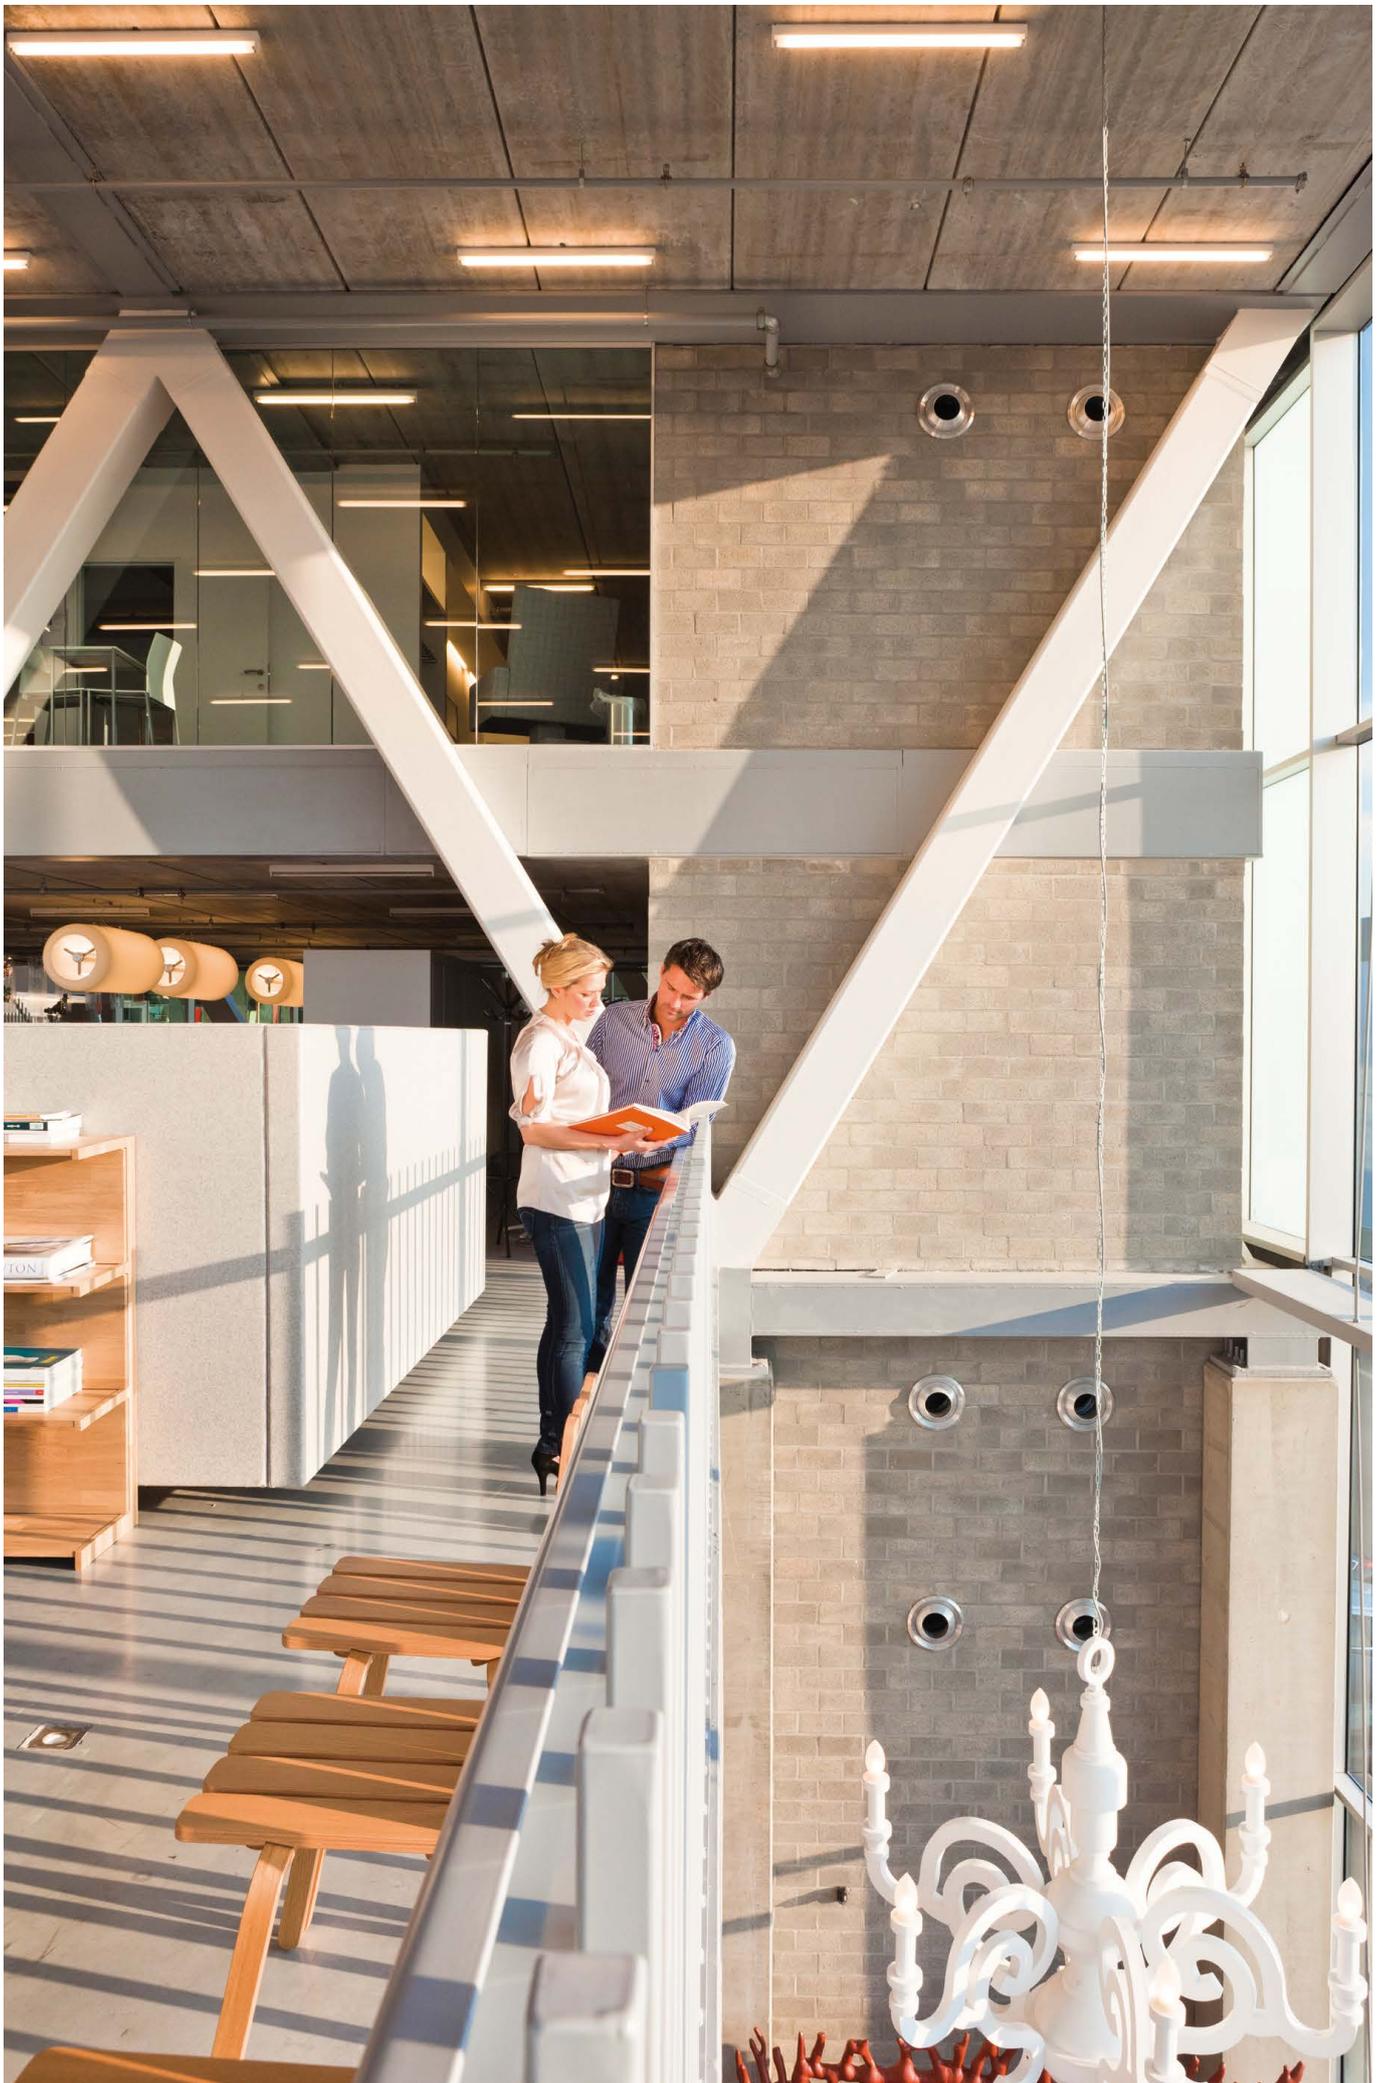

Contents

Condensing Unit

ERAD-E-SS
ERAD-E-SL

82
83

Air cooled screw condensing unit

Standard efficiency

Standard sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)

Cooling only				ERAD-E-SS	120	140	170	200	220	250	310	370	440	490	
Cooling capacity	Nom.		kW		121	144	165	196	219	251	309	370	435	488	
Power input	Cooling	Nom.	kW		42.1	51.2	57.7	65.6	74.2	77.0	93.8	123	148	161	
Capacity control	Method				Stepless										
	Minimum capacity		%		25.0										
EER					2.88	2.82	2.86	2.99	2.95	3.27	3.30	3.02	2.95	3.02	
Dimensions	Unit	Height	mm		2,273						2,223				
		Width	mm		1,292						2,236				
		Depth	mm		2,165		3,065		3,965		3,070				
			mm		1,584		1,741		1,936		2,679				
Weight	Unit		kg		1,584		1,741		1,936		2,679				
	Operation weight		kg		1,617		1,781		1,981		2,756				
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler										
Compressor	Type				Single screw compressor										
	Quantity				1										
Fan	Type				Direct propeller										
	Air flow rate	Nom.	l/s		10,924	10,576	16,386	15,865	21,848	21,153	32,772		31,729		
	Quantity				2		3		4		6				
	Speed	Cooling	Nom.	rpm	900										
Sound power level	Cooling	Nom.	dBA		92			93		94		95			
Sound pressure level	Cooling	Nom.	dBA		74				75				76		
Operation range	Saturated suction temp.		°C		-9~12										
	Condenser inlet temp.		°C		-18~48										
Refrigerant	Type / GWP				R-134a / 1,430										
	Circuits	Quantity			1										
Piping connections	Evaporator water inlet/outlet (OD)				76mm						139.7mm				
Unit	Maximum starting current		A		151		195		288		330		410		
	Nominal running current (RLA)	Cooling	A		72	88	98	110	125	129	158	204	244	266	
	Maximum running current		A		86	103	119	132	157	164	198	242	284	298	
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400										

Air cooled screw condensing unit

Standard efficiency

Low sound



ERAD-E-SS/SL

MicroTech III

Cooling only				ERAD-E-SL	120	140	160	190	210	240	300	350	410	460	
Cooling capacity	Nom.		kW		116	137	159	187	209	243	298	352	409	462	
Power input	Cooling	Nom.	kW		42.4	52.5	57.7	66.3	73.9	78.1	91.9	122	150	167	
Capacity control	Method				Stepless										
	Minimum capacity		%		25.0										
EER					2.74	2.61	2.75	2.83	3.11	3.24	2.88	2.73	2.76		
Dimensions	Unit	Height	mm		2,273						2,223				
		Width	mm		1,292						2,236				
		Depth	mm		2,165		3,065		3,965		3,070				
			kg		1,684		1,841		2,036		2,789				
Weight	Unit		kg		1,684		1,841		2,036		2,789				
	Operation weight		kg		1,717		1,881		2,081		2,886				
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler											
Compressor	Type			Single screw compressor											
	Quantity			1											
Fan	Type			Direct propeller											
	Air flow rate	Nom.	l/s	8,373	8,144	12,560	12,216	16,747	16,288	25,120	24,432				
	Quantity			2		3		4		6					
	Speed	Cooling	Nom.		700										
Sound power level	Cooling	Nom.	dBA	89		90		91		92		93			
Sound pressure level	Cooling	Nom.	dBA	71				73				74			
Operation range	Saturated suction temp		°C	-9~12											
	Condenser inlet temp		°C	-18~48											
Refrigerant	Type / GWP			R-134a / 1,430											
	Circuits	Quantity		1											
Piping connections	Evaporator water inlet/outlet (OD)			76mm						139.7mm					
Unit	Maximum starting current		A	151		195		288		330		410			
	Nominal running current (RLA)	Cooling	A	73	90	98	112	125	131	155	204	249	275		
	Maximum running current		A	83	100	115	128	151	158	189	234	276	290		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											



Daikin's efficient, flexible and maintenance-friendly water cooled chillers are especially suitable for critical industrial applications where a temperature control accuracy of $\pm 0.5^{\circ}\text{C}$ is required. Water cooled chillers are available with different compressor types:

Water cooled scroll chillers

These units are among the most efficient, quiet and reliable chillers available today. Units can be easily integrated with the HVAC system of your choice.

Water cooled screw chillers

The Daikin water cooled screw chillers provide the ideal solution for sound sensitive environments. Applications range from comfort cooling to ice making.

Water cooled centrifugal chillers (oil free)

Small footprint, quiet compressor, easy integration with existing HVAC system... This technology offers a good return on investment and provides an ideal solution for large cooling applications.

Choose a Daikin water cooled chiller

Large product line-up

Thanks to an extensive product line-up in medium- to large-scale facilities (from 13 kW up to 10,900 kW), you can select the optimum model for your application.

Application versatility

Daikin delivers energy efficiency to a wide range of process and comfort climate applications, for all conditions and cooling or heating requirements. These chillers generate cold and hot water, which can be used for chilling, heating or even both at the same time.

Outstanding durability

The latest technology for magnetic bearings is used in the compressor, the heart of the centrifugal chiller. Result? Outstanding durability for lower maintenance costs.

Installation flexibility

Water cooled chillers can be installed indoors and require limited space in a machine room.

Contents

Water cooled

Cooling only	
EWVQ-B-SS	86
EWVQ-B-XS	87
Cooling & Heating only	
EWVW-KBW1N	88
EWVW-G-SS	90
EWVW-G-XS	91
NEW EWVW-G-SS	92
NEW EWVQ-G-SS	93
NEW EWVQ-L-SS	94
EWVW-I-SS	96
EWVW-I-XS	97
EWVW-J-SS	98
EWVW-H-XS	99
Oil-free Centrifugal chillers	
EWVW-FZX	100

Water cooled screw chiller

Standard efficiency

Standard sound

- › 1 or 2 stepless single-screw compressors
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Shell and tube heat exchanger
- › Standard electronic expansion valve
- › Compact design
- › Partial heat recovery available
- › MicroTech III controller with superior control logic and easy interface

Cooling only		EWWQ-B-SS		380	460	560	640	730	800	860	870	960	C10	C11	C12	C13	C14	C15	C16	C17	C19	C20			
Cooling capacity	Nom.	kW		379	462	560	635	724	793	859	868	956	1,003	1,050	1,181	1,251	1,320	1,452	1,595	1,754	1,896	2,055			
Power input	Cooling	Nom.		kW		89.2	109	133	150	170	179	207	199	218	247	243	268	285	303	337	373	407	441	477	
Capacity control	Method			Stepless																					
	Minimum capacity	%		12.5					25.0	12.5	25.0	12.5										25.0			
EER				4.24	4.21	4.22	4.25	4.42	4.15	4.36	4.38	4.07	4.32	4.41	4.38	4.35	4.31	4.28	4.31	4.30	4.31	4.30	4.31		
ESEER				4.64	4.69	4.70	4.46	5.08	4.35	5.07	5.03	4.28	5.04	5.05	5.06	5.00	4.66	4.76	4.61	4.63	4.54				
Dimensions	Unit	Height	mm	1,849		2,001		1,848		2,158		1,848		2,158		1,851		2,378		2,455		2,495			
				Width	mm	1,140		1,276		1,314		1,350		1,327		1,350		1,314		1,350					
						Depth	mm	3,373		3,454		3,535		5,020		3,535		5,020		3,535		4,894		5,070	
Weight	Unit	kg		1,933	1,967			2,283	2,332	2,407	3,921	2,427	3,949	3,988	2,457	4,344	4,529	4,536	4,607	4,988	4,999	5,053	5,204	5,289	
		Operation weight		kg		2,135	2,169	2,543	2,628	2,777	4,422	2,795	4,463	4,496	2,812	4,780	5,186	5,200	5,280	5,602	5,615	5,670	5,881	5,970	
Water heat exchanger - evaporator	Type	Single pass shell and tube																							
		Water volume	l	124	118	176	170	274	344	266	344	325	251	325	538			505			495	539	527		
				Water flow rate	Nom.	l/s		18.1	22.1	26.8	30.4	34.7	38.0	41.1	41.6	45.8	48.0	50.3	56.5	59.9	63.2	69.5	76.5	84.1	91.0
Water pressure drop	Cooling	Nom.		kPa		48	63	44	47	54	53	49	62	58	56	69	45	49	54	59	69	88	97	120	
Water heat exchanger - condenser	Type	Single pass shell and tube																							
		Water flow rate	Nom.	l/s		22.4	27.4	33.2	37.7	43.1	23.3	51.3	23.3	28.2	60.1	28.2	34.7	34.8	38.9	43.0	43.4	52.0	52.3	60.9	
		Water flow rate 2	Nom.	l/s						23.3		-	27.9	28.2	-	33.8	34.7	38.9		43.0	51.3	52.0	60.1	60.9	
		Water pressure drop	Cooling	Nom.		kPa		59	63	67	65	16	64	20	64	67	26	67	73		69	16	17	15	
Water pressure drop 2	Cooling	Nom.		kPa				64		-	66	67	-	69	73	69		16	19	17	14	15			
Compressor	Type	Single screw compressor																							
		Quantity	1		2		1	2		1		2		1		2		1		2		1			
Sound power level	Cooling	Nom.		dBA		100	101	102		105	102	105		103	105		107		106		107		108		
Sound pressure level	Cooling	Nom.		dBA		82	83	84		83	84	85		86		87		86		87		88			
Operation range	Evaporator	Cooling	Min.~Max.		°CDB		-4~10																		
	Condenser	Cooling	Min.~Max.		°CDB		25~45																		
Refrigerant	Type / GWP	R-410A / 2,087.5																							
	Circuits	Quantity		1					2	1	2	1	2					1					2		
Refrigerant charge	Per circuit	kg/TCO ₂ Eq		1200/2505	1000/2088	1750/3653	900/1879	800/1670	850/1774	900/1879	450/939	850/1774	1000/2088	1600/3340	1000/2088	1500/3131			1300/2714			1500/3131	1600/3340	1300/2714	
Piping connections	Evaporator water inlet/outlet	mm		152.4		203.2										254									
	Condenser water inlet/outlet	inch		5		6		5					6					5							
Unit	Maximum starting current	A		455		656		599	656	626		656	663		690		902		954		988				
	Nominal running current (RLA)	Cooling	A		149	175	211	237	269	299	329	325	352	391	387	423	449	476	539	596	650	702	755		
	Maximum running current	A		179	214	259	294	308	358	372	393	427	434	473	519	553	587	615	679	744	771	830			
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																					

Water cooled screw chiller

High efficiency

Standard sound



EWWQ-B-SS/XS

MicroTech III

Cooling only				EWWQ-B-XS																	
				420	520	640	730	800	970	C10	C11	C12	C13	C14	C15	C16	C17	C19	C20	C21	
Cooling capacity	Nom.	kW		420	513	636	722	798	969	1,033	1,111	1,153	1,265	1,363	1,442	1,580	1,740	1,870	2,025	2,156	
Power input	Cooling	Nom. kW		88.7	107	131	149	166	201	213	239	238	262	281	299	324	361	397	436	474	
Capacity control	Method	Stepless																			
	Minimum capacity	%		12.5						25.0	12.5	25.0									
EER				4.74	4.79	4.84	4.83	4.81		4.86	4.64	4.85	4.83	4.85	4.83	4.88	4.81	4.71	4.64	4.55	
ESEER				5.27	5.29	5.37	5.36	5.30	5.09	5.56	4.99	5.52		5.65	5.61	5.26	5.18	4.98	4.91	4.75	
Dimensions	Unit	Height	mm	2,001						2,003	2,001	2,454	2,003	2,454				2,495			
				Width	mm	1,276		1,268	1,314	1,446	1,350	1,446					1,350				
						Depth	mm	3,863		3,878		3,920	5,219	3,919	5,219				4,829		4,865
Weight	Unit	Operation weight	kg	2,322	2,403			2,464	2,738	2,407	2,427	4,775	2,457	4,831	4,873	4,919	4,969	5,117	5,388	5,408	5,414
				2,594	2,685	2,745	3,158	2,815	3,056	5,431	3,086	5,479	5,512	5,546	5,606	5,794	5,843	6,110	6,118	6,124	
Water heat exchanger - evaporator	Type	Single pass shell and tube																			
		Water volume	l	220	213	200	334	325	538	587	538	575	563	551		495	484	535	527		
				Water flow rate	Nom. l/s	20.1	24.6	30.5	34.6	38.2	46.4	49.5	53.2	55.2	60.6	65.3	69.1	75.7	83.5	89.7	97.2
Water pressure drop	Cooling	Nom. kPa	55	68	71	64	57	53		68	64	55	67	74	69	88	90	111	124		
Water heat exchanger - condenser	Type	Single pass shell and tube																			
		Water flow rate	Nom. l/s	24.4	29.8	36.8	41.8	46.3	56.2	29.9	64.7	30.2	36.7	37.2	41.8	45.7	46.2	54.4	55.1	63.1	
				Water flow rate 2	Nom. l/s	-						29.9	-	36.6	36.7	41.8		45.7	54.7	54.4	63.0
		Water pressure drop	Cooling	Nom. kPa	50	39	42	47	59	64	40	82	36	48	49	46	44	45	60	61	78
Water pressure drop 2	Cooling	Nom. kPa	-						40	-	47	48	46		44	60		78			
Compressor	Type	Single screw compressor																			
		Quantity	1						2	1	2										
Sound power level	Cooling	Nom. dBA	101	102	103	102	103	105	104	106		107		106		107		108			
Sound pressure level	Cooling	Nom. dBA	82	83	84	83	84	86	85	86		87		86		87		88			
Operation range	Evaporator	Cooling	Min.~Max. °CDB	-4~10																	
	Condenser	Cooling	Min.~Max. °CDB	25~45																	
Refrigerant	Type / GWP	R-410A / 2,087.5																			
		Circuits	1						2	1	2										
Refrigerant charge	Per circuit	kg/TCO _{Eq}	1200/250.5	1300/271.4	95.0/198.3	135.0/281.8	110.0/229.6	150.0/313.1	120.0/250.5	130.0/271.4	120.0/250.5	150.0/313.1	120.0/250.5	150.0/313.1	130.0/271.4		150.0/313.1				
Piping connections	Evaporator water inlet/outlet	mm	152.4			203.2		254	203.2	254	203.2				254						
	Condenser water inlet/outlet	inch	8			6		6	6	5	6		8								
Unit	Maximum starting current	A	455						656		656	663	690		902	954		988	998		
	Nominal running current (RLA)	Cooling A	149	173	208	235	258	313	346	370	381	417	443	469	511	567	621	678	734		
	Maximum running current	A	179	214	259	294	308	372	427	434	473	519	553	587	615	679	744	771	830		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																		

Water cooled scroll heat pump


- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Low refrigerant volume
- › Stainless steel plate heat exchanger
- › Extension possible to 195kW
- › Easy installation and maintenance
- › Remote cooling or heating selection
- › Water/water heat pump, with water reversibility
- › Compatible with hydraulic module EPMC
- › Advanced μC^2SE controller for direct connection to a Modbus based BMS or to a remote user interface
- › Standard integrated: main switch, water filter, flow switch, air purge, pressure ports
- › Advanced pCO^3 controller for assembly of 2 or 3 modules



Heating only & Cooling only				EWWP-KBW1N																	
				014	022	028	035	045	055	065	090	100	110	120	130	145	155	165	175	185	195
Cooling capacity	Nom.			kW																	
Heating capacity	Nom.			kW																	
Power input	Cooling	Nom.																			
	Heating	Nom.	kW																		
EER				3.44 3.49 3.54 3.51 3.48 3.55 3.54 3.52 3.51 3.56 3.59 3.51 3.50 3.53 3.56 3.59																	
COP				4.45 4.49 4.54 4.55 4.51 4.48 4.56 4.55 4.54 4.48 4.56 4.59 4.53 4.51 4.54 4.56 4.60																	
Space heating	Average climate water outlet 55°C	General	η_s (Seasonal space heating efficiency)	%																	
			SCOP																		
	Average climate water outlet 35°C	General	η_s (Seasonal space heating efficiency)	%																	
			SCOP																		
Dimensions	Unit	Height	mm																		
		Width	mm																		
		Depth	mm																		
Weight	Unit				kg																
Water heat exchanger - evaporator	Type	Minimum water volume in the system			l																
		Water flow rate	Min.	l/min																	
			Nom.	l/min																	
			Max.	l/min																	
Water heat exchanger - condenser	Type	Minimum water volume in the system			l																
		Water flow rate	Min.	l/min																	
			Nom.	l/min																	
			Max.	l/min																	
Compressor	Type	Hermetically sealed scroll compressor																			
	Quantity	1 2 4 2 4 2 4 2 6 4 6																			
Compressor 2	Quantity	-																			
Sound power level	Cooling	Nom.	dB(A)																		
Operation range	Evaporator	Cooling	Min.~Max.	°CDB																	
	Condenser	Cooling	Min.~Max.	°CDB																	
Refrigerant	Type / GWP	R-407C / 1,773.9																			
	Control	Thermostatic expansion valve																			
	Circuits	Quantity	1 2 4 6																		
Refrigerant charge	Per circuit	kg/TCO,Eq																			
Piping connections	Evaporator water inlet/outlet (OD)			FBSP 25mm FBSP 40mm 2 x 2 x FBSP 38mm 3 x 2 x FBSP 38mm																	
	Evaporator water drain			Field installation																	
	Condenser water inlet/outlet (OD)			FBSP 25mm FBSP 40mm 2 x 2 x FBSP 38mm 3 x 2 x FBSP 38mm																	
Unit	Starting current	Max	A																		
	Running current	Cooling	Nom.	A																	
		Max	A																		
Power supply	Phase/Frequency/Voltage			Hz/V																	

Water cooled scroll chiller

Combination table

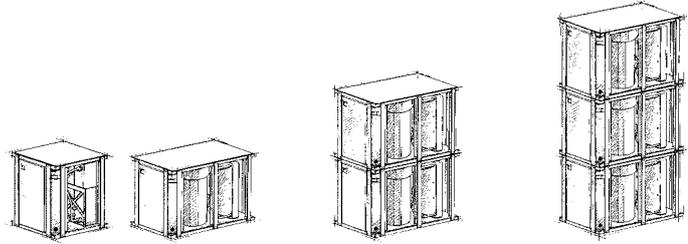


Selection table		1 Module (KB-series)						2 Modules (KB-series)						3 Modules (KB-series)					
Capacity index		014	022	028	035	045	055	065	090	100	110	120	130	145	155	165	175	185	195
Cooling capacity (kW)		12.9	21.4	27.8	32.3	42.8	55.7	64.7	85.7	98.6	112	121	130	141	154	167	176	185	194
Heating capacity (kW)		16.7	27.5	35.6	41.5	55.0	71.7	83.0	110	127	143	155	166	182	198	215	226	237	249
Unit + Control (Factory mounted)	EWWP014KBW1N	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	EWWP022KBW1N	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	EWWP028KBW1N	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	EWWP035KBW1N	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	EWWP045KBW1N	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	EWWP055KBW1N	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-
Modular units (Controller available as accessory)	EWWP065KBW1N	-	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-
	EWWP045KAW1M	-	-	-	-	-	-	-	2	1	-	-	-	2	1	-	-	-	-
	EWWP055KAW1M	-	-	-	-	-	-	-	-	1	2	1	-	1	2	3	2	1	-
Control (Kit)	EWWP065KAW1M	-	-	-	-	-	-	-	-	-	1	2	-	-	-	1	2	3	
	ECB2MUAW	-	-	-	-	-	-	-	1	1	1	1	1	-	-	-	-	-	-
	ECB3MUAW	-	-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1

For example: for a 121 kW HP system, select : EWWP055KBW1N + EWWP065KBW1N

EHMC

Hydraulic Module

- › Accessory for EWWP-KBW1N chillers
- › 3 models available
- › 100 litre tank for all sizes
- › Freeze up protection
- › High static pump (option)
- › Standard drain kit (for indoor use)
- › Standard dual pressure ports (Pump suction and discharge)

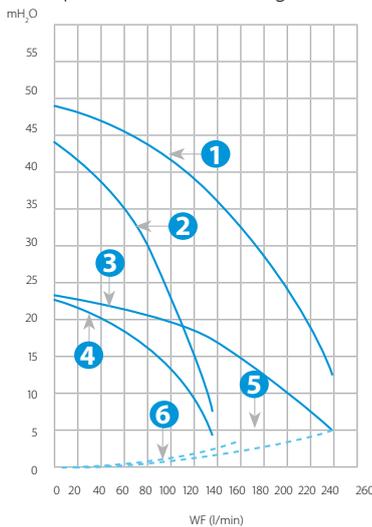

- Legends**
Pump characteristics
1. EHMC30AV1080
 2. EHMC10AV1080 & EHMC15AV1080
 3. EHMC30AV1010
 4. EHMC10AV1010 & EHMC15AV1010
- Hydraulic module + filter pressures losses
5. EHMC15/30AV1010 & EHMC15/30AV1080
 6. EHMC10AV1010 & EHMC10AV1080



EHMC-AV		10		15		30	
		1010	1080	1010	1080	1010	1080
Nominal flow	l/min	62		88		187	
Nominal ESP	mH ₂ O	17	34	15	27	10	27
Nominal input	W	630	1,050	650	1,070	1,070	2,090
Dimensions (HxWxD)	mm	1,284x635x688		1,284x635x688		1,284x635x688	
Machine weight	kg	99	101	102	104	105	111
Sound power	dB(A)	63		63		63	
Sound pressure	dB(A)	52		52		52	
Power supply	V1	1~/230V/50Hz					
Operation range	Water side	-10°C ~ 55°C					
	Air side	-10°C ~ 43°C					
Piping connections	Water inlet/outlet	1" BSPF		2" BSPF		2-1/2" BSPF	
	Drain connection	1/2"					

Water cooled screw chiller

Standard efficiency

Standard sound

- › Stepless single-screw compressor
- › 1-2 truly independent refrigerant circuits
- › Standard electronic expansion valve
- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Partial and total heat recovery option available
- › MicroTech III controller with superior control logic and easy interface

Heating only & Cooling only				EWWD-G-SS	170	210	260	300	320	380	420	460	500	600	
Cooling capacity	Nom.			kW	165	200	252	279	332	370	401	446	492	554	
Heating capacity	Nom.			kW	209	253	319	357	420	467	506	566	626	710	
Power input	Cooling	Nom.		kW	43.8	52.6	67.4	78.5	87.5	96.4	105	119	134	157	
	Heating	Nom.		kW	43.8	52.6	67.4	78.5	87.5	96.4	105	119	134	157	
Capacity control	Method				Stepless										
	Minimum capacity			%	25.0					12.5					
EER					3.77	3.80	3.74	3.55	3.80	3.84	3.80	3.74	3.68	3.53	
ESEER					4.50	4.54	4.46	4.25	4.75	4.80	4.76	4.67	4.59	4.44	
COP					4.77	4.80	4.74	4.55	4.80	4.84	4.80	4.74	4.68	4.53	
Space heating 	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	165	164		159		-					
					SCOP	4.20	4.17	4.18	4.06	-					
Dimensions	Unit	Height		mm	1,860					1,880					
		Width		mm	920					860					
		Depth		mm	3,435					4,305					
Weight	Unit			kg	1,393	1,410	1,503		2,687	2,697	2,702	2,757	2,762		
	Operation weight			kg	1,470	1,480	1,650		2,840	2,850	2,860	2,970			
Water heat exchanger - evaporator	Type				Single pass shell and tube										
	Water volume			l	60	56	123		118	113		173	168		
	Water flow rate	Nom.		l/s	7.9	9.6	12.1	13.4	15.9	17.7	19.2	21.4	23.6	26.5	
Water heat exchanger - condenser	Water pressure drop	Cooling	Total	kPa	45	61	41	49	58	57	66	50		59	
	Type				Single pass shell and tube										
Compressor	Water flow rate	Nom.		l/s	10.0	12.1	15.3	17.1	10.1	10.2	12.2	12.4	15.0	17.0	
	Water flow rate 2	Nom.		l/s		-			10.1	12.2		14.8	15.0	17.0	
	Water pressure drop	Cooling	Nom.	kPa	38	39	60	73	37	38	39	41	57	70	
	Water pressure drop 2	Cooling	Nom.	kPa		-			37	39		56	57	70	
Refrigerant	Type / GWP				R-134a / 1,430										
	Circuits	Quantity			1					2					
Refrigerant charge	Per circuit			kg/TCO_Eq	60.0 / 85.8					55.0 / 78.7					
Piping connections	Evaporator water inlet/outlet (OD)				88.9			114.3			139.7mm				
	Condenser water inlet/outlet (OD)				5"										
Unit	Starting current	Max		A	288					380	397		420		438
	Running current	Cooling	Nom.	A	75	85	105	122	149	160	171	190	209	242	
		Max		A	114	136	165	186	229	250	272	301	330	373	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

Water cooled screw chiller

High efficiency

Standard sound



EWWD-G-SS/XS

MicroTech III

Heating only & Cooling only		EWWD-G-XS		190	230	280	320	380	400	460	500	550	650			
Cooling capacity	Nom.			kW	185	222	276	306	365	407	443	495	539	602		
Heating capacity	Nom.			kW	226	272	337	379	446	496	540	602	657	743		
Power input	Cooling	Min.			kW	40.6	49.4	61.0	73.4	81.1	89.0	107	117	141		
		Heating	Nom.			kW	40.6	49.4	61.0	73.4	81.1	89.0	107	117	141	
Capacity control	Method		Stepless													
	Minimum capacity				%	25.0				12.5						
EER						4.57	4.50	4.53	4.17	4.50	4.58	4.57	4.61	4.59	4.26	
ESEER						5.37	5.31	5.33	4.91	5.54	5.62	5.61	5.68	5.67	5.27	
COP						5.57	5.50	5.53	5.17	5.50	5.58	5.6	5.61	5.59	5.26	
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	-											
					SCOP	4.75	4.68	4.69	4.44	-						
Dimensions	Unit	Height			mm	1,860				1,880						
		Width			mm	920				860						
		Depth			mm	3,435				4,305						
Weight	Unit			kg	1,650	1,665	1,680	2,800	2,945	2,955	2,975	2,990				
	Operation weight			kg	1,800	1,810	1,820	3,020	3,280	3,290	3,315	3,340				
Water heat exchanger - evaporator	Type		Single pass shell and tube													
	Water volume			l	125	120	110	170	285		280					
	Water flow rate	Nom.			l/s	8.9	10.6	13.2	14.6	17.5	19.5	21.2	23.7	25.8	28.8	
Water heat exchanger - condenser	Water pressure drop	Cooling	Total	kPa	23	31	30	37	28	21	24	33	39	47		
					-											
Water heat exchanger - condenser	Type		Single pass shell and tube													
	Water flow rate	Nom.			l/s	10.9	13.1	16.2	18.2	10.7	10.9	13.0	13.2	15.8	17.9	
	Water flow rate 2	Nom.			l/s	-				10.7	13.0		15.8		17.9	
	Water pressure drop	Cooling	Nom.			kPa	16	18	22	27	15			14	17	
Compressor	Water pressure drop 2	Cooling	Nom.	kPa	-											
					15											
Compressor	Type		Single screw compressor													
	Quantity				1				2							
Sound power level	Cooling	Nom.			dB(A)	88				90						
Sound pressure level	Cooling	Nom.			dB(A)	70				72						
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-8~15											
	Condenser	Cooling	Min.~Max.	°CDB	20~55											
Refrigerant	Type / GWP		R-134a / 1,430													
	Circuits	Quantity				1				2						
Refrigerant charge	Per circuit			kg/TCO_Eq	60.0 / 85.8			65.0 / 93.0		60.0 / 85.8	65.0 / 93.0	60.0 / 85.8				
Piping connections	Evaporator water inlet/outlet (OD)					114.3			139.7		168.3mm					
	Condenser water inlet/outlet (OD)					5"										
Unit	Starting current	Max			A	288				380		397		420		438
	Running current	Cooling	Nom.			A	71	81	96	109	142	152	161	174	186	210
		Max			A	114	136	165	186	229	250	272	301	330	373	
Power supply	Phase/Frequency/Voltage				Hz/V	3~/50/400										

Water cooled multi-scroll heat pump reversing on refrigerant side

Standard efficiency
Standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version with reversibility on refrigerant side available, ideal for geothermal applications
- › Compact design to allow easy indoor installation or retrofit operations
- › Designed for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa head) available for evaporator and condenser



Heating & Cooling				EWHQ-G-SS		100	120	130	150	160	190	210	240	270	340	400
Cooling capacity	Nom.		kW			87.3	100.0	111	127	141	160	181	208	232	291	352
Heating capacity	Nom.		kW			112	128	144	162	179	205	233	266	299	375	454
Power input	Cooling	Nom.	kW			22.4	25.3	28.5	32.0	35.6	41.1	46.0	53.3	59.1	73.7	88.4
		Heating	Nom.	kW		27.0	30.9	35.2	39.3	43.6	50.4	56.6	64.7	72.2	90.3	109
Capacity control	Method					Step										
	Minimum capacity			%		50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0
EER						3.90	3.95	3.91	3.96	3.95	3.90	3.93	3.90	3.92	3.95	3.98
ESEER						4.70	4.84	4.65	4.86	4.80	4.89	4.86	4.83	4.79	4.90	4.83
COP						4.15	4.16	4.09	4.12	4.11	4.07	4.11	4.10	4.14	4.16	4.18
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%		160		163	167	166			172	171	163	-
					SCOP	4.08		4.14	4.24	4.23			4.22	4.37	4.35	4.16
Dimensions	Unit	Height		mm	1,066											
		Width		mm	928					1,186						
		Depth		mm	2,432		2,264			2,432						
Weight	Unit	Operation weight		kg	519	608	728	770	808	838	880	930	941	1,090	1,203	
		kg		558	654	782	830	873	908	995	1,019	1,031	1,202	1,334		
Water heat exchanger - evaporator	Type				Plate heat exchanger											
	Water volume			l	6	8		10	12	13	15	17		27	34	
	Water flow rate	Cooling	Nom.	l/s	4.2	4.8	5.3	6.1	6.7	7.7	8.7	10.0	11.1	13.9	16.9	
			Heating	Nom.	l/s	4.1	4.7	5.2	5.9	6.5	7.4	8.5	9.6	10.9	13.7	16.6
	Water pressure drop	Cooling	Nom.	kPa	44		35	30	29	31	33	31	38	42	43	
Heating			Nom.	kPa	42		33	28	27	29	32	29	37	41	42	
Water heat exchanger - condenser	Type				Plate heat exchanger											
	Water volume			l	6	8		10	12	13	15	17		27	34	
	Water flow rate	Cooling	Nom.	l/s	5.2	6.0	6.7	7.7	8.5	9.7	10.9	13.7	13.9	17.4	21.1	
			Heating	Nom.	l/s	5.4	6.2	7.0	7.8	8.7	9.9	11.2	12.5	14.3	18.0	21.8
	Water pressure drop	Cooling	Nom.	kPa	69		55	49	48	51	54	32	39	66	69	
Heating			Nom.	kPa	73		59	51	50	53	57	33	42	70	73	
Compressor	Type				Scroll compressor											
	Quantity				2											
Sound power level	Cooling	Nom.	dBA	80	83	85	87	88			90	92	93			
		Sound pressure level	Nom.	dBA	64	67	69	70	72			74	76		77	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-8~15											
		Condenser	Cooling	Min.~Max.	°CDB	25~55										
Refrigerant	Type / GWP				R-410A / 2,087.5											
	Circuits			Quantity	1											
Refrigerant charge	Per circuit		kg/TCO ₂ Eq	9.0 / 18.8	10.0 / 20.9		13.0 / 27.1	11.0 / 23.0	13.0 / 27.1	15.0 / 31.3		19.0 / 39.7				
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2	2" 1/2					3"						
	Condenser water inlet/outlet (OD)			1" 1/2	2" 1/2					3"						
Unit	Starting current		Max	A	204	255	261	308	316	354	368	466	481	640	677	
	Running current	Cooling	Nom.	A	43	46	50	56	63	71	78	88	97	123	148	
			Max	A	59	66	72	80	88	102	116	131	145	183	221	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400												

Water cooled multi-scroll chiller

Standard efficiency

Standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › Designed for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa head) available for evaporator and condenser



EWQ-G-SS

Heating only & Cooling only					EWQ-G-SS		090	100	120	130	150	170	190	210	240	300	360			
Cooling capacity	Nom.			kW	93.7	106	119	136	150	172	194	221	246	314	370					
Heating capacity	Nom.			kW	118	133	150	169	187	215	244	276	310.00	396	468					
Power input	Cooling	Nom.			kW	21.3	24.0	26.9	30.5	33.9	38.9	43.8	50.7	56.1	70.2	84.0				
		Nom.			kW	25.7	29.2	32.9	37.2	41.4	47.6	53.7	61.3	68.3	85.6	103				
Capacity control	Method				Step															
		Minimum capacity			%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0				
EER					4.40		4.42	4.46	4.42		4.35		4.39	4.48	4.41					
ESEER					5.51	5.52	5.51	5.53	5.51	5.53	5.52									
COP					4.58	4.56	4.55		4.53	4.52	4.54	4.50	4.54	4.62	4.56					
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	SCOP															
					168	170	173		172	169	167	171	-							
					4.28	4.33	4.40	4.39	4.40	4.38	4.29	4.25	4.34	-						
Dimensions	Unit	Height			mm	1,066										1,186				
		Width			mm	928														
		Depth			mm	2,432		2,264			2,432									
Weight	Unit				kg	516	606	728	762	795	832	871	921	934	1,083	1,181				
		Operation weight			kg	555	652	782	821	859	901	946	1,010	1,023	1,195	1,311				
Water heat exchanger - evaporator	Type				Plate heat exchanger															
	Water volume				l	6	8		10	12	13	15	17		27	34				
	Water flow rate	Cooling	Nom.	l/s	4.5	5.1	5.7	6.5	7.2	8.2	9.3	10.6	11.8	15.1	17.7					
			Heating	Nom.	l/s	4.4	5.0	5.6	6.3	7.0	8.0	9.1	10.3	11.6	14.9	17.5				
	Water pressure drop	Cooling	Nom.	kPa	49		39	33		35	37	34	42	47						
Heating			Nom.	kPa	47		38	31		33	35	32	41	46						
Water heat exchanger - condenser	Type				Plate heat exchanger															
	Water volume				l	6	8		10	12	13	15	17		27	34				
	Water flow rate	Cooling	Nom.	l/s	5.5	6.2	7.1	8.0	8.9	10.2	11.4	13.0	14.5	18.5	21.8					
			Heating	Nom.	l/s	5.7	6.4	7.3	8.2	9.1	10.4	11.8	13.3	15.0	19.1	22.6				
	Water pressure drop	Cooling	Nom.	kPa	72	73	60	50		52	56	46	57	69	71					
Heating			Nom.	kPa	76	77	63	52		54	59	48	61	74	76					
Compressor	Type				Scroll compressor															
	Quantity				2															
Sound power level	Cooling	Nom.		dBa	80	83	85	87	88		90		92	93						
		Nom.		dBa	64	67	69	70	72		74		76		77					
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~15															
			Condenser	Cooling	Min.~Max.	°CDB	25~55													
Refrigerant	Type / GWP				R-410A / 2,087.5															
	Circuits				1															
Refrigerant charge	Per circuit			kg/TCO _{Eq}	10.0 / 20.9		11.0 / 23.0		12.0 / 25.1		15.0 / 31.3		16.0 / 33.4		17.0 / 35.5		19.0 / 39.7		20.0 / 41.8	
Piping connections	Evaporator water inlet/outlet (OD)				1" 1/2					2" 1/2					3"					
	Condenser water inlet/outlet (OD)				1" 1/2					2" 1/2					3"					
Unit	Starting current	Max		A	204	255	261	308	316	354	368	466	481	640	677					
		Running current	Cooling	Nom.	A	42	45	48	54	61	68	76	86	95	118	143				
				Max	A	59	66	72	80	88	102	116	131	145	183	221				
Power supply	Phase/Frequency/Voltage				Hz/V 3~/50/400															

Water cooled multi-scroll chiller

Standard efficiency

Standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Pump (low 100 kPa and high 200 kPa head) available for evaporator and condenser



Heating only & Cooling only				EWWQ-L-SS															
				180	205	230	260	290	330	380	430	480	540	600	660	720			
Cooling capacity	Nom.	kW		187	215	244	273	303	345	387	430	476	549	611	663	721			
Heating capacity	Nom.	kW		234	269	305	339	377	430	486	537	601	692	773	843	917			
Power input	Cooling	Nom. kW		41.7	47.3	53.1	60.2	67.1	77.1	87.0	97.9	110	124	140	154	167			
	Heating	Nom. kW		50.5	57.5	65.0	73.6	82.0	94.4	107	118	133	150	171	188	204			
Capacity control	Method																		
	Minimum capacity			Step															
EER			25.0	21.0	25.0	22.0	25.0	23.0	25.0	21.0	25.0	22.0	20.0	18.0	25.0				
ESEER			4.49	4.55	4.60	4.53	4.52	4.47	4.45	4.39	4.34	4.44	4.37	4.31	4.32				
COP			5.54	5.52	5.52	5.53	5.54	5.53	5.54	5.52	5.51	5.55	5.51	5.52					
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency) SCOP																
						177	176	178	176	177									
						4.08	4.14	4.24	4.23										
Dimensions	Unit	Height	mm		1,970										2,090	2,210			
		Width	mm		928														
		Depth	mm		2,801														
Weight	Unit	kg		877	1,062	1,285	1,347	1,439	1,498	1,559	1,673	1,722	1,842	1,926	2,105	2,229			
		Operation weight	kg		957	1,156	1,401	1,469	1,575	1,641	1,723	1,851	1,918	2,044	2,145	2,346	2,405		
Water heat exchanger - evaporator	Type		Plate heat exchanger																
	Water volume		l		35	41	53	65	76	92	115								
	Water flow rate	Cooling	Nom.	l/s		9.0	10.3	11.7	13.0	14.5	16.5	18.5	20.6	22.8	26.3	29.3	31.8	34.6	
		Heating	Nom.	l/s		8.8	10.1	11.5	12.7	14.1	16.1	18.2	20.1	22.4	26.0	28.9	31.4	34.2	
	Water pressure drop	Cooling	Nom.	kPa		28	23	28	25	32	33	40	51	50	59	69			
Heating		Nom.	kPa		27	22	27	24	31	39	50	48	58	68					
Water heat exchanger - condenser	Type		Plate heat exchanger																
	Water volume		l		19	22	29	35	41	49	62								
	Water flow rate	Cooling	Nom.	l/s		5.5	6.3	7.2	8.1	9.0	10.2	11.4	12.7	14.0	14.5	18.0	17.9	21.3	
		Heating	Nom.	l/s		11.3	13.0	14.8	16.5	18.3	20.9	23.5	25.9	28.9	33.4	37.2	40.5	44.2	
	Water flow rate 2	Cooling	Nom.	l/s		5.5	6.3	7.2	8.1	9.0	10.2	11.4	12.7	14.0	17.8	18.0	21.3		
		Heating	Nom.	l/s		7.2	7.3	6.1	4.9	5.0	5.1	5.5	4.6	5.7	4.3	6.7	6.8		
	Water pressure drop	Cooling	Nom.	kPa		76	77	64	52	53	59	48	60	70	72	73			
Heating		Nom.	kPa		72	73	61	49	50	51	55	46	57	66	67	68			
Compressor	Type		Scroll compressor																
	Quantity		4																
Sound power level	Cooling	Nom. dBA		83	86	88	90	91	93	95	96								
	Heating	Nom. dBA		65	68	70	72	74	73	76	77	78							
Operation range	Evaporator	Cooling	Min.~Max. °CDB		-10~15														
	Condenser	Cooling	Min.~Max. °CDB		25~55														
Refrigerant	Type / GWP		R-410A / 2,087.5																
	Circuits		2																
Refrigerant charge	Per circuit	kg/TCO ₂ Eq		10.0/20.9	11.0/23.0	12.0/25.1	15.0/31.3	16.0/33.4	17.0/35.5	19.0/39.7	20.0/41.8								
Piping connections	Evaporator water inlet/outlet (OD)		3"																
	Condenser water inlet/outlet (OD)		1" 1/2 2" 1/2 3"																
Unit	Starting current		Max A		263	320	333	388	403	456	484	597	626	785	822	860	898		
	Running current	Cooling	Nom. A		83	89	96	109	121	137	151	171	189	210	236	260	284		
		Heating	Max A		118	131	144	160	175	205	232	262	290	328	366	403	441		
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400														



Water cooled screw chiller

Standard efficiency

Standard sound

- › Stepless single-screw compressor
- › **One, two or three** truly independent **refrigerant circuits**
- › Standard electronic expansion valve
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Partial and total heat recovery option available
- › MicroTech III controller with superior control logic and easy interface

Heating only & Cooling only				EWWD-I-SS																		
				340	400	460	550	650	700	800	850	900	950	C10	C12	C13	C14	C15	C16	C17	C18	
Cooling capacity	Nom.	kW		332	392	458	536	637	703	779	841	907	982	1,024	1,151	1,200	1,270	1,341	1,395	1,449	1,503	
Heating capacity	Nom.	kW		405	481	562	660	783	863	955	1,032	1,112	1,207	1,267	1,412	1,475	1,560	1,648	1,721	1,793	1,866	
Power input	Cooling	Nom.	kW	73.5	88.6	104	124	146	160	176	191	205	225	243	262	275	290	307	325	344	363	
	Heating	Nom.	kW	73.5	88.6	104	124	146	160	176	191	205	225	243	262	275	290	307	325	344	363	
Capacity control	Method	Stepless																				
	Minimum capacity	%		25.0						12.5						8.3						
EER				4.51	4.43	4.39	4.31	4.37	4.38	4.41	4.40	4.42	4.37	4.22	4.40	4.36	4.38	4.37	4.29	4.21	4.14	
ESEER				4.55	4.46	4.44	4.37	4.99	5.18	5.00	5.13	4.92	5.05	4.82	4.96	5.00	4.99	5.00	4.91	4.79		
COP				5.51	5.43	5.39	5.31	5.37	5.38	5.41	5.40	5.42	5.37	5.22	5.40	5.36	5.38	5.37	5.29	5.21	5.14	
Dimensions	Unit	Height	mm	1,821						2,103						2,323						
		Width	mm	1,466						1,350						2,130						
		Depth	mm	3,298						4,116						4,439						
Weight	Unit	kg		2,150	2,160	2,179	2,224	3,909	3,927	3,945	3,971	3,996	4,080	4,092	6,079	6,097	6,136	6,174	6,192	6,210	6,228	
	Operation weight	kg		2,380	2,396	2,410	2,457	4,217	4,228	4,243	4,262	4,288	4,369	4,386	6,628	6,646	6,670	6,699	6,717	6,735	6,761	
Water heat exchanger - evaporator	Type	Single pass shell and tube																				
	Water volume	l		193	183	172	271	263	256	248	241	233	472	504	489	472						
	Water flow rate	Nom.	l/s	15.9	18.8	21.9	25.7	30.5	33.6	37.3	40.3	43.4	47.0	49.0	55.1	57.4	60.8	64.2	66.8	69.4	72.0	
	Water pressure drop	Cooling	Nom.	kPa	37	50	54	62	55	44	57	53	44	54	39	52	55	46	57	62	66	71
Heating		Nom.	kPa	37	50	54	62	55	44	57	53	44	54	39	52	55	46	57	62	66	71	
Water heat exchanger - condenser	Type	Single pass shell and tube																				
	Water flow rate	Nom.	l/s	19.5	23.1	27.0	31.7	18.8	19.1	23.0	23.2	26.8	27.2	30.5	22.6	22.9	26.4		29.9			
	Water flow rate 2	Nom.	l/s	-			18.8	22.4	23.0	26.5	26.8	30.8	30.5	22.6	26.1	26.4		29.9				
	Water flow rate 3	Nom.	l/s	-																		
	Water pressure drop	Cooling	Nom.	kPa	26	28	30	26	25	27	28	26	22	23	24	25	24		23			
		Heating	Nom.	kPa	26	28	30	26	25	26	27	28	26	23	24	25	24		23			
	Water pressure drop 2	Cooling	Nom.	kPa	-			25	26	27	26		23		24	23	24		23			
Heating		Nom.	kPa	-			25	26	27	26		23		24	23	24		23				
Compressor	Type	Single screw compressor																				
	Quantity	1 2 3																				
	Sound power level	Cooling	Nom.	dBa	94	97			98	99	100			101	103							
Sound pressure level	Cooling	Nom.	dBa	75	76	78			79	80	81			80	81	83						
Operation range	Evaporator	Cooling	Min.~Max.	-8~15																		
	Condenser	Cooling	Min.~Max.	20~55																		
Refrigerant	Type / GWP	R-134a / 1,430																				
	Circuits	Quantity	1						2						3							
Refrigerant charge	Per circuit	kg/TCO ₂ Eq	540/772	520/744	600/858	550/787	600/858	750/1073	550/787	500/787	520/744	517/739	513/734	510/729	507/725	503/720	580/829					
Piping connections	Evaporator water inlet/outlet (OD)	168.3mm																				
	Condenser water inlet/outlet (OD)	5"																				
Unit	Maximum starting current	A	330	464			493	627	650	681	703			836	867	898	920	942				
	Nominal running current (RLA)	Cooling	A	119	145	166	196	236	262	288	310	329	355	382	431	450	470	493	520	547	574	
	Maximum running current	A	204	233	271	299	407	436	465	504	542	570	597	698	737	775	814	841	868	896		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																			

Water cooled screw chiller

High efficiency

Standard sound



EWWD-I-SS/XS

MicroTech III

Heating only & Cooling only				EWWD-I-XS												
				360	440	500	600	750	800	850	950	C10	C11	C12		
Cooling capacity	Nom.			kW	360	431	504	570	717	791	863	929	971	1,035	1,130	
Heating capacity	Nom.			kW	435	520	608	697	865	995	1,040	1,122	1,180	1,263	1,380	
Power input	Cooling	Nom.		kW	74.5	89.5	104	127	148	163	178	193	208	228	250	
		Heating	Nom.		kW	74.5	89.5	104	127	148	163	178	193	208	228	250
Capacity control	Method			Stepless												
	Minimum capacity			%	25.0						12.5					
EER					4.83	4.82		4.50	4.85	4.84	4.85	4.81	4.66	4.53	4.51	
ESEER					4.81	4.74	4.70	4.60	5.52	5.68	5.41	5.53	5.31	5.45	5.10	
COP					5.83	5.82		5.50	5.85	5.84	5.85	5.81	5.66	5.53	5.51	
Dimensions	Unit	Height		mm	1,883						2,245					
		Width		mm	1,430						1,350					
		Depth		mm	4,012						4,782					
Weight	Unit	Operation weight		kg	2,594	2,667	2,704	4,964	4,997	5,049	5,073	5,097	5,132			
				kg	2,998	3,078	3,116	5,582	5,615	5,671	5,695	5,729	5,741			
Water heat exchanger - evaporator	Type			Single pass shell and tube												
	Water volume			l	326	317	308	539			528			504		
	Water flow rate	Nom.		l/s	17.3	20.7	24.1	27.3	34.4	37.9	41.3	44.5	46.6	49.5	54.1	
		Water pressure drop	Cooling	Nom.	kPa	64		54	68	58	68	56	64	72	46	52
Heating	Nom.		kPa	64		54	68	58	68	56	64	72	46	52		
Water heat exchanger - condenser	Type			Single pass shell and tube												
	Water flow rate	Nom.		l/s	20.9	25.0	29.2	33.4	20.8	21.0	25.0		28.3			33.1
		Water flow rate 2		Nom.	l/s	-			20.8	24.9	25.0	28.8	28.3	32.3	33.1	
	Water pressure drop	Cooling	Nom.	kPa	48	47	51	66	48		47		50	51	65	
		Heating	Nom.	kPa	48	47	51	66	48		47		50	65		
Water pressure drop 2	Cooling	Nom.	kPa	-			48	47		50		65				
Compressor	Type			Single screw compressor												
	Quantity			1						2						
Sound power level	Cooling	Nom.		dBA	94	97			98	99	100					
Sound pressure level		Nom.		dBA	75	76	78			79	80	81				
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-8~15											
	Condenser	Cooling	Min.~Max.	°CDB	20~55											
Refrigerant	Type / GWP			R-134a / 1,430												
	Circuits	Quantity			1						2					
Refrigerant charge	Per circuit			kg/TCO ₂ Eq	100.0/143.0	87.0/124.4	130.0/185.9	105.0/150.2	90.0/128.7	88.5/126.6	87.0/124.4	86.0/123.0	85.0/121.6			
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm						219.1mm						
	Condenser water inlet/outlet (OD)			5"												
Unit	Maximum starting current			A	330	464			493	627	650	681		703		
	Nominal running current (RLA)	Cooling		A	117	144	164	194	235	261	287	307	327	358	388	
		Maximum running current		A	204	233	271	299	407	436	465	504	542	570	597	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

Water cooled screw chiller

Standard efficiency

Standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech III controller with superior control logic and easy interface



Heating only & Cooling only				EWWD-J-SS																																																																
				120	140	150	180	210	250	280	310	330	360	380	400	450	500	530	560																																																	
Cooling capacity	Nom.			kW	120	146	154	177	207	255	284	309	333	356	385	415	463	512	540	568																																																
Heating capacity	Nom.			kW	148	180	194	223	258	315	354	388	417	446	486	515	573	631	669	709																																																
Power input	Cooling	Nom.		kW	28.0	34.0	39.5	45.3	50.4	59.9	70.0	78.8	84.6	90.3	101	110	120	130	140																																																	
		Heating	Nom.	kW	28.0	34.0	39.5	45.3	50.4	59.9	70.0	78.8	84.6	90.3	101	110	120	130	140																																																	
Capacity control	Method				Stepless																																																															
		Minimum capacity				25.0								12.5																																																						
EER				4.28	4.29	3.90	3.91	4.11	4.26	4.06	3.92	3.94	3.82	4.12	4.20	4.28	4.16	4.05																																																		
ESEER				4.51	4.20		4.28	4.68	4.01	4.32	4.35	4.50	4.31	4.65	4.74	4.83	4.73	4.33																																																		
COP				5.28	5.29	4.90	4.91	5.11	5.26	5.06	4.92	4.94	4.82	5.12	5.20	5.28	5.16	5.05																																																		
Space heating	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%	173				171				163				167				175				165				159				-																																			
					SCOP	4.40	4.34	4.14	4.15	4.24	4.46	4.21	4.04	-																																																						
Dimensions	Unit	Height				1,020								913								2,000																																														
		Width				2,684																																																														
		Depth				2,684																																																														
Weight	Unit				1,177				1,233				1,334				1,366				1,416				1,600				1,607				2,668				2,700				2,732				2,782				2,832				3,016				3,200				3,207				3,215			
		Operation weight				1,211				1,276				1,378				1,415				1,473				1,663				1,675				2,755				2,792				2,830				2,888				2,946				3,136				3,327				3,338				3,350		
Water heat exchanger - evaporator	Type				Plate heat exchanger																																																															
		Water volume				14				18				14				17				20				26				29				31				33				37				41				46				52														
		Water flow rate	Nom.		l/s	5.7	7.0	7.4	8.5	9.9	12.2	13.6	14.8	15.9	17.0	18.4	19.8	22.1	24.5	25.8	27.2																																															
		Water pressure drop	Cooling	Nom.	kPa	15	14	43	40	35	28	34	43	40	37	35	31	28	31	34																																																
Water heat exchanger - condenser	Type				Single pass shell and tube																																																															
		Water volume				20				23				25				29				32				45				48				51				54				57				61				64																		
		Water flow rate	Nom.		l/s	7.1	8.6	9.3	10.7	12.4	15.2	17.0	9.3	10.7	11.0	12.4	15.2	16.9	17.0																																																	
		Water pressure drop	Cooling	Nom.	kPa	19	12	11	16	26	9.3	10.7	12	11	16	26																																																				
Compressor	Type				Single screw compressor																																																															
		Quantity				1								2																																																						
Sound power level	Cooling	Nom.		89				94																																																												
Sound pressure level	Cooling	Nom.		79				82																																																												
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~15																																																															
	Condenser	Cooling	Min.~Max.	°CDB	23~60																																																															
Refrigerant	Type / GWP				R-134a / 1,430																																																															
		Circuits				1								2																																																						
Refrigerant charge	Per circuit				180/257				350/50.1				340/48.6				370/52.9				380/54.3				330/47.2				335/47.9				340/48.6				350/50.1				360/51.5				370/52.9				380/54.3																			
Piping connections	Evaporator water inlet/outlet				76.2																																																															
		Condenser water inlet/outlet (OD)				2" 1/2								4"																																																						
Unit	Starting current	Max				151				195				288				281				293				310				403				422				440																														
			Running current	Cooling	Nom.	A	48	57	67	74	83	97	109	134	141	149	157	165	180	195	206	218																																														
				Max	A	76	97	107	122	143	167	189	215	230	245	265	286	311	335	357	378																																															
Power supply	Phase/Frequency/Voltage				3~/50/400																																																															

Water cooled screw chiller

High efficiency

Standard sound

- › High energy efficient units: **full range Eurovent Class A**
- › **Heat pump version** available
- › **Flooded type heat exchangers**
- › MicroTech III controller with superior control logic and easy interface



Heating only & Cooling only				EWWD-H-XS	370	450	530	610	750	830	930	980	C10	C11	C12	
Cooling capacity	Nom.	kW		368	444	520	606	745	825	930	975	1,047	1,130	1,212		
Heating capacity	Nom.	kW		432	520	608	709	873	965	1,083	1,141	1,224	1,321	1,416		
Power input	Cooling	Nom.	kW	65.2	77.8	89.8	104	130	143	156	168	179	193	207		
	Heating	Nom.	kW	64.0	76.7	88.4	103	128	140	154	166	177	191	204		
Capacity control	Method			Stepless												
	Minimum capacity			25.0						12.5						
EER				5.64	5.70	5.78	5.81	5.74	5.79	5.95	5.80	5.84		5.85		
ESEER				5.80	5.82	5.90	5.91	6.44	6.51	6.59	6.63	6.66	6.69	6.68		
COP				6.75	6.79	6.88	6.89	6.84	6.87	7.06	6.89	6.93		6.94		
Dimensions	Unit	Height	mm	2,121			2,048			2,161						
		Width	mm	1,353			1,384	1,689			1,711					
		Depth	mm	3,341		3,419	3,417	3,609			3,509					
Weight	Unit	kg		3,089	3,370	3,603	3,781	5,289	5,375	5,654	5,707	6,066	6,105	6,156		
	Operation weight		kg	3,250	3,588	3,870	4,163	5,694	5,835	6,174	6,262	6,709	6,773	6,859		
Water heat exchanger - evaporator	Type			Single pass shell and tube												
	Water volume		l	78	107	134	160	172	201	261	272	295	310	327		
	Water flow rate	Nom.	l/s	17.6	21.2	24.9	29.0	35.7	39.5	44.5	46.7	50.1	54.1	58.0		
	Water pressure drop	Cooling	Nom.	kPa	40	33		40	47	38	35	36	33	32		
Heating		Nom.	kPa	40	33		40	47	38	35	36	33	32			
Water heat exchanger - condenser	Type			Single pass shell and tube												
	Water flow rate		Nom.	l/s	20.8	25.1	29.3	34.2	42.1	46.5	52.2	55.0	59.0	63.7	68.3	
	Water pressure drop	Cooling	Nom.	kPa	31	26	28	23	30	28	33	31	29	30		
		Heating	Nom.	kPa	31	26	28	23	30	28	33	31	29	30		
Compressor	Type			Single screw compressor												
	Quantity			1						2						
Sound power level	Cooling	Nom.	dB(A)	97	98	99		100	101		102		103			
Sound pressure level	Cooling	Nom.	dB(A)	78	79	80		81	82		83		84			
Operation range	Evaporator	Cooling	Min.-Max. °CDB	-8~15												
	Condenser	Cooling	Min.-Max. °CDB	18~60												
Refrigerant	Type / GWP			R-134a / 1,430												
	Circuits			1												
Refrigerant charge	Per circuit	kg/TCO _{Eq}		180.0/257.4	210.0/300.3	230.0/328.9	250.0/357.5	270.0/386.1				300.0/429.0		320.0/457.6		
Piping connections	Evaporator water inlet/outlet			168.3			219.1									
	Condenser water inlet/outlet			6			8									
Unit	Maximum starting current			A			330	464	448	471		492		626	646	
	Nominal running current (RLA)	Cooling	A	107	124	141	166	213	231	249	266	283	307	330		
			A	148	176	202	228	296	323	351	378	404	430	456		
Power supply	Phase/Frequency/Voltage			3~/50/400												

Water cooled centrifugal chiller

High efficiency
Standard sound

- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › An inverter driven compressor allows the capacity to be adjusted precisely to match variations in room and outside temperatures
- › Onboard digital electronics provide smart controls



EWWD-FZXS

MicroTech II

Cooling only		EWWD-FZXS		320	430	520	640	860	C10	
Cooling capacity	Min.	kW		113	133	170	113	133	169	
	Max.	kW		316	439	520	639	887	1,054	
Power input	Cooling	Min.	kW		20.6	25.5	32.7	20.5	25.5	32.6
		Max.	kW		65.1	90.4	106	129	179	208
Capacity control	Method		Stepless							
EER			4.85	4.86	4.93	4.97	4.95	5.06		
ESEER			8.11	8.39	8.66	8.83	8.52	8.88		
Dimensions	Unit	Height	mm		1,823		1,755	1,748	1,794	
		Width	mm		1,276		1,790	1,853	1,904	
		Depth	mm		3,254	3,419	3,441	3,289	3,401	
Weight	Unit	kg		2,360	2,416	2,546	3,709	4,095	4,765	
	Operation weight	kg		2,520	2,634	2,812	4,074	4,548	5,330	
Water heat exchanger - evaporator	Type		Flooded shell and tube							
	Water volume	l		78	107	134	184	210	302	
	Water flow rate	Nom.	l/s		15.1	21.0	24.9	30.6	42.4	50.4
Water heat exchanger - condenser	Type	Water pressure drop	Cooling	Nom.	kPa		30	32	33	31
		Type		Flooded shell and tube						
		Water flow rate	Nom.	l/s		18.3	25.5	30.1	36.9	51.3
Compressor	Type	Water pressure drop	Cooling	Nom.	kPa		24	26	29	29
		Type		Oil free centrifugal compressor						
		Quantity			1			2		
Sound power level	Cooling	Nom.	dBA		89	90	91	92	94	95
Sound pressure level	Cooling	Nom.	dBA		71	72	73	74	75	76
Operation range	Evaporator	Cooling	Min.~Max.	°CDB		2~15				
	Condenser	Cooling	Min.~Max.	°CDB		18~46				
Refrigerant	Type / GWP		R-134a / 1,430							
	Circuits	Quantity		1						
Refrigerant charge	Per circuit	kg/TCO_Eq		240.0 / 343.2	220.0 / 314.6	180.0 / 257.4	220.0 / 314.6		300.0 / 429.0	
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm			219.1mm		273mm	
	Condenser water inlet/outlet (OD)			168.3mm			219.1mm			
Unit	Maximum starting current		A		2					
	Nominal running current (RLA)	Cooling	A		104	142	168	207	285	335
	Maximum running current		A		135	210	176	270	420	352
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400					

Contents

Condenserless chiller

	EWLP-KBW1N	102
NEW	EWLQ-G-SS	103
NEW	EWLQ-L-SS	104
	EWLD-J-SS	105
	EWLD-G-SS	106
	EWLD-I-SS	107

Condenserless scroll chiller

- › One of the most **compact units** on the market:
 - 600 x 600 x 600mm
- › Daikin scroll compressor
- › Low operating sound level
- › Low energy consumption
- › Low refrigerant volume
- › Easy installation and maintenance
- › Stainless steel plate heat exchanger
- › Compatible with hydraulic module EHMC
- › Standard integrated: main switch, pressure ports, flow switch, filter, shut-off valves and air purge
- › Advanced μC^2SE controller for direct connection to a Modbus based BMS or to a remote user interface



Cooling only		EWLP-KBW1N		012	020	026	030	040	055	065
Cooling capacity	Nom.		kW	12.1	20.0	26.8	31.2	40.0	53.7	62.4
Power input	Cooling	Nom.	kW	4.2	6.6	8.5	10.1	13.4	17.8	20.3
Capacity steps number				1				2		
EER				2.88	3.03	3.15	3.09	2.99	3.02	3.07
Dimensions	Unit	HeightxWidthxDepth	mm	600x600x600				600x600x1,200		
Weight	Unit		kg	108	141	147	151	252	265	274
Water heat exchanger - evaporator	Minimum water volume in the system			62	103	134	155	205	268	311
	Type			Braze plate						
	Water flow rate	Min.	l/min	31	53	65	76	101	131	152
		Nom.	l/min	35	57	77	89	115	154	179
		Max.	l/min	69	115	154	179	229	308	357
	Model	Quantity		1						
Compressor	Type			Hermetically sealed scroll compressor						
	Quantity			1				2		
Sound power level	Cooling	Nom.	dB(A)	64			71	67		74
Operation range	Evaporator	Cooling	Min.-Max. °CDB	-10~20						
	Condenser	Cooling	Min.-Max. °CDB	25~60						
Refrigerant	Type / GWP			R-407C / 1,773.9						
	Control			Thermostatic expansion valve						
	Circuits	Quantity		1				2		
Piping connections	Evaporator water inlet/outlet (OD)			FBSP 25mm				FBSP 40mm		
	Evaporator water drain			Field installation						
Power supply	Phase/Frequency/Voltage		Hz/V	3N~/50/400						

Condenserless multi-scroll chiller

Standard efficiency

Standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



Cooling only		EWLQ-G-SS		090	100	120	130	150	170	190	210	240	300	360	
Cooling capacity	Nom.		kW	86.5	98.4	110	125	139	160	181	206	231	290	346	
Power input	Cooling	Nom.	kW	22.4	25.8	29.2	33.0	36.8	42.0	47.0	54.2	59.9	75.6	91.8	
Capacity control	Method	Step													
	Minimum capacity		%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
EER				3.86	3.81	3.78	3.79	3.80	3.86	3.80	3.85	3.84	3.77		
Dimensions	Unit	Height	mm	1,066											
		Width	mm	928											
		Depth	mm	2,743											
Weight	Unit		kg	494	578	686	714	742	773	807	838	852	967	1,046	
	Operation weight		kg	525	615	729	760	791	826	863	901	916	1,044	1,134	
Water heat exchanger - evaporator	Water pressure drop	Cooling	Nom.	kPa	44		35	29		31	33	30	38	41	
	Type	Plate heat exchanger													
	Water volume		l	6	8		10	12	13	15	17		27	34	
Compressor	Water flow rate	Nom.	l/s	4.2	4.7	5.3	6.0	6.7	7.7	8.7	9.8	11.1	13.9	16.6	
	Type	Scroll compressor													
Sound power level	Quantity	2													
	Cooling	Nom.	dB(A)	80	83	85	87	88		90	92	93			
Sound pressure level	Cooling	Nom.	dB(A)	64	67	69	70	72		74	76		77		
	Evaporator	Cooling	Min.~Max.	°CDB	-10~15										
Operation range	Condenser	Cooling	Min.~Max.	°CDB	30~60										
	Type / GWP	R-410A / 2,087.5													
Refrigerant	Circuits	Quantity		1											
	Evaporator water inlet/outlet (OD)				1" 1/2					2" 1/2				3"	
Piping connections	Starting current	Max	A	204	255	261	308	316	354	368	466	481.0	640	677	
	Running current	Cooling	Nom.	A	39	42	45	51	57	64	70	81	88	111	135
		Max	A	59	66	72	80	88	102	116	131	145	183	221	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400											

Condenserless multi-scroll chiller

Standard efficiency

Standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



EWLQ-L-SS

Cooling only				EWLQ-L-SS	180	205	230	260	290	330	380	430	480	540	600	660	720
Cooling capacity	Nom.		kW	173	197	224	249	279	317	361	409	459	511	571	624	676	
Power input	Cooling	Nom.	kW	44.3	51.1	57.9	65.6	73.2	83.8	93.5	108	119	135	152	168	184	
Capacity control	Method			Step													
	Minimum capacity		%	25.0	21.0	25.0	22.0	25.0	23.0	25.0	21.0	25.0	22.0	20.0	18.0	25.0	
EER				3.91	3.86	3.87	3.79	3.81	3.78	3.86	3.79	3.84	3.78	3.76	3.71	3.67	
Dimensions	Unit	Height	mm	1,970													
		Width	mm	928													
		Depth	mm	2,801													
Weight	Unit		kg	832	1,007	1,202	1,252	1,333	1,380	1,432	1,511	1,560	1,609	1,694	1,833	1,957	
	Operation weight		kg	894	1,081	1,292	1,345	1,436	1,486	1,547	1,638	1,690	1,741	1,844	1,990	2,120	
Water heat exchanger - evaporator	Water pressure drop	Cooling	Nom.	kPa	25		20	25	22	29		36	45	44	52	62	
	Type				Plate heat exchanger												
	Water volume		l	19	22	29		35		41	49		62				
Compressor	Water flow rate	Nom.	l/s	8.3	9.5	10.7	11.9	13.4	15.2	17.3	19.6	21.9	24.5	27.3	29.9	32.4	
	Type			Scroll compressor													
Sound power level	Quantity			4													
	Cooling	Nom.	dB(A)	83	86	88	90	91		93	95		96				
Sound pressure level	Cooling	Nom.	dB(A)	65	68	70	72	74		73	76	77		78			
	Evaporator	Cooling	Min.~Max.	°CDB	-10~15												
Operation range	Condenser	Cooling	Min.~Max.	°CDB	30~60												
	Type / GWP			R-410A / 2,087.5													
Refrigerant	Circuits	Quantity		2													
	Evaporator water inlet/outlet (OD)			3"													
Piping connections	Starting current	Max	A	263	320	333	388	403	456	484	597	626	785	822	860	898	
	Running current	Cooling	Nom.	A	78	84	90	102	114	128	141	161	176	199	223	246	269
		Max	A	118	131	144	160	175	205	232	262	290	328	366	403	441	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400													

Condenserless screw chiller

Standard efficiency

Standard sound

- › Compact design to allow **easy indoor installation or retrofit operations**
- › Daikin semi-hermetic single screw stepless compressor
- › **High energy efficiency both at full and part load conditions**
- › Chilled water temperatures **down to -10°C** on standard unit
- › MicroTech III controller with superior control logic and easy interface



EWLD-J-SS

MicroTech III

		EWLD-J-SS	110	130	145	165	235	195	265	290	310	330	360	390	430	470	500	530		
Cooling capacity	Nom.	kW	110	128	142	163	236	191	264	285	306	327	355	382	428	473	501	529		
Power input	Cooling	Nom.	kW	31.2	38.4	43.8	50.4	66.0	56.0	75.3	87.4	94.0	100	106	111	122	132	141	150	
Capacity control	Method		Stepless																	
	Minimum capacity	%	25.0												12.5					
EER			3.51	3.33	3.25	3.24	3.58	3.42	3.51	3.26	3.25	3.35	3.43	3.52	3.59	3.55	3.52			
Dimensions	Unit	Height	1,020						913						2,000					
		Width	2,684																	
		Depth	2,684																	
Weight	Unit	kg	1,124	1,141	1,237	1,263	1,489	1,305	1,489	2,474	2,500	2,526	2,568	2,611	2,795	2,979				
	Operation weight	kg	1,138	1,159	1,253	1,281	1,518	1,327	1,518	2,505	2,533	2,562	2,608	2,655	2,845	3,036				
Water heat exchanger - evaporator	Type	Plate heat exchanger																		
	Water volume	l	14	18	14	17	26	20	26	29	31	33	37	41	46	52				
	Water flow rate	Nom.	l/s	5.2	6.1	6.8	7.8	11.3	9.2	12.6	13.6	14.6	15.6	17.0	18.3	20.5	22.6	24.0	25.3	
	Water pressure drop	Cooling	Nom.	kPa	14	13	39	37	26	33	32	39	37	34	33	29	26	29	32	
Compressor	Type	Single screw compressor																		
	Quantity		1												2					
Sound power level	Cooling	Nom.	dB(A)	89												94				96
Sound pressure level	Cooling	Nom.	dB(A)	79												82				83
Operation range	Evaporator	Cooling	Min.~Max.	-10~15																
	Condenser	Cooling	Min.~Max.	25~60																
Refrigerant	Type / GWP	R-134a / 1,430																		
	Circuits	Quantity	1									2								
Piping connections	Evaporator water inlet/outlet (OD)	76.2 mm																		
Unit	Maximum starting current	A	151	195			288	195	288	281	293		310	403	422	440				
	Nominal running current (RLA)	Cooling	A	52	62	72	81	107	91	120	145	153	162	171	181	197	214	227	241	
	Maximum running current	A	76	97	107	122	167	143	189	215	230	245	265	286	311	335	357	378		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																	

Condenserless screw chiller

Standard efficiency

Standard sound

- › Stepless single-screw compressor
- › **1-2 truly independent refrigerant circuits**
- › Standard electronic expansion valve
- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Partial heat recovery available
- › MicroTech III controller with superior control logic and easy interface



Cooling only		EWLD-G-SS		160	190	240	280	320	360	380	420	480	550	
Cooling capacity	Nom.		kW	160	188	243	269	315	350	379	426	474	524	
Power input	Cooling	Nom.	kW	46.2	55.3	66.9	75.7	92.3	101	110	122	133	151	
Capacity control	Method	Stepless												
	Minimum capacity		%	25.0				12.5						
EER				3.47	3.40	3.64	3.55	3.41	3.46	3.43	3.51	3.56	3.48	
Dimensions	Unit	Height	mm	1,860			1,880		1,942					
			Width	1,000			1,100							
			Depth	3,700			4,400							
Weight	Unit	Operation weight	kg	1,280		1,398		2,442	2,446		2,501	2,506		
			kg	1,337		1,516		2,560				2,670		
Water heat exchanger - evaporator	Type		Single pass shell and tube											
	Water volume		l	60	56	123		118	113		173	168		
	Water flow rate	Nom.	l/s	7.7	9.0	11.6	12.9	15.1	16.8	18.2	20.4	22.7	25.1	
	Water pressure drop	Cooling	Nom.	kPa	42	58	40	49	55	54	63	48	49	59
Compressor	Type		Single screw compressor											
	Quantity			1				2						
Sound power level	Cooling	Nom.	dB(A)	88				90						
Sound pressure level	Cooling	Nom.	dB(A)	70				72						
Operation range	Evaporator	Cooling	Min.-Max.	-8~15										
	Condenser	Cooling	Min.-Max.	25~60										
Refrigerant	Type / GWP		R-134a / 1,430											
	Circuits	Quantity		1				2						
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm			114.3mm			139.7mm				
Unit	Maximum starting current		A	288				380		397		420		438
	Nominal running current (RLA)	Cooling	A	79	90	107	120	157	169	181	197	213	240	
	Maximum running current		A	114	136	165	186	229	250	272	301	330	373	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										

Condenserless screw chiller


Standard efficiency

Standard sound

- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Stepless single-screw compressor
- › Standard electronic expansion valve



Cooling only		EWLD-I-SS		320	400	420	500	600	650	750	800	850	900	950	C10	C11	C12	C13	C14	C15	C16	C17		
Cooling capacity	Nom.	kW		315	374	437	509	607	670	740	802	865	935	975	1,029	1,097	1,144	1,210	1,278	1,330	1,381	1,433		
Power input	Cooling	Nom.	kW		80.3	96.0	113	134	160	175	192	208	224	246	264	283	286	302	318	336	356	375	395	
Capacity control	Method	Stepless																						
	Minimum capacity	%		25.0						12.5						8.3								
EER					3.93	3.89	3.88	3.79	3.80	3.82	3.86		3.81	3.69	3.64	3.83	3.79	3.80		3.74	3.68	3.63		
Dimensions	Unit	Height	mm		1,899						2,325						2,415							
		Width	mm		1,464												2,135							
		Depth	mm		3,114						4,391						4,426							
Weight	Unit	kg		1,861	1,869	1,884	3,331	3,339	3,347	3,356	3,364	3,412		5,146	5,167		5,188		5,208					
	Operation weight	kg		2,054	2,052	2,056	3,602	3,603	3,604	3,605	3,645		5,667	5,671		5,677		5,680						
Water heat exchanger - evaporator	Type	Single pass shell and tube																						
	Water volume	l		193	183	172	271	263	256	248	241	233		504		489	472	504		489	472			
	Water flow rate	Nom.	l/s		15.1	17.9	20.9	24.4	29.1	32.1	35.4	38.4	41.4	44.8	46.7	49.3	52.5	54.8	57.9	61.2	63.7	66.1	68.6	
Compressor	Type	Cooling	Total	kPa		34	46	49	56	50	40	52	49	40	49	36	54	47	51	43	53	57	61	65
				Quantity	1						2						3							
Sound power level	Cooling	Nom.	dBA		94	97				98	99	100				101		103						
Sound pressure level	Cooling	Nom.	dBA		75	76	78				79	80	81				80	81	83					
Operation range	Evaporator	Cooling	Min.~Max.	°CDB		-8~15																		
	Condenser	Cooling	Min.~Max.	°CDB		25~60																		
Refrigerant	Type / GWP	R-134a / 1,430																						
	Circuits	Quantity	1						2						3									
Piping connections	Evaporator water inlet/outlet (OD)	42mm																						
Unit	Maximum starting current	A		330	464				493	627	650	681	703		836	867	898	920	942					
	Nominal running current (RLA)	Cooling	A		131	157	181	214	260	287	313	338	361	391	420	448	470	493	517	542	571	601	631	
	Maximum running current	A		204	233	271	299	407	436	465	504	542	570	597	670	698	737	775	814	841	868	896		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																				

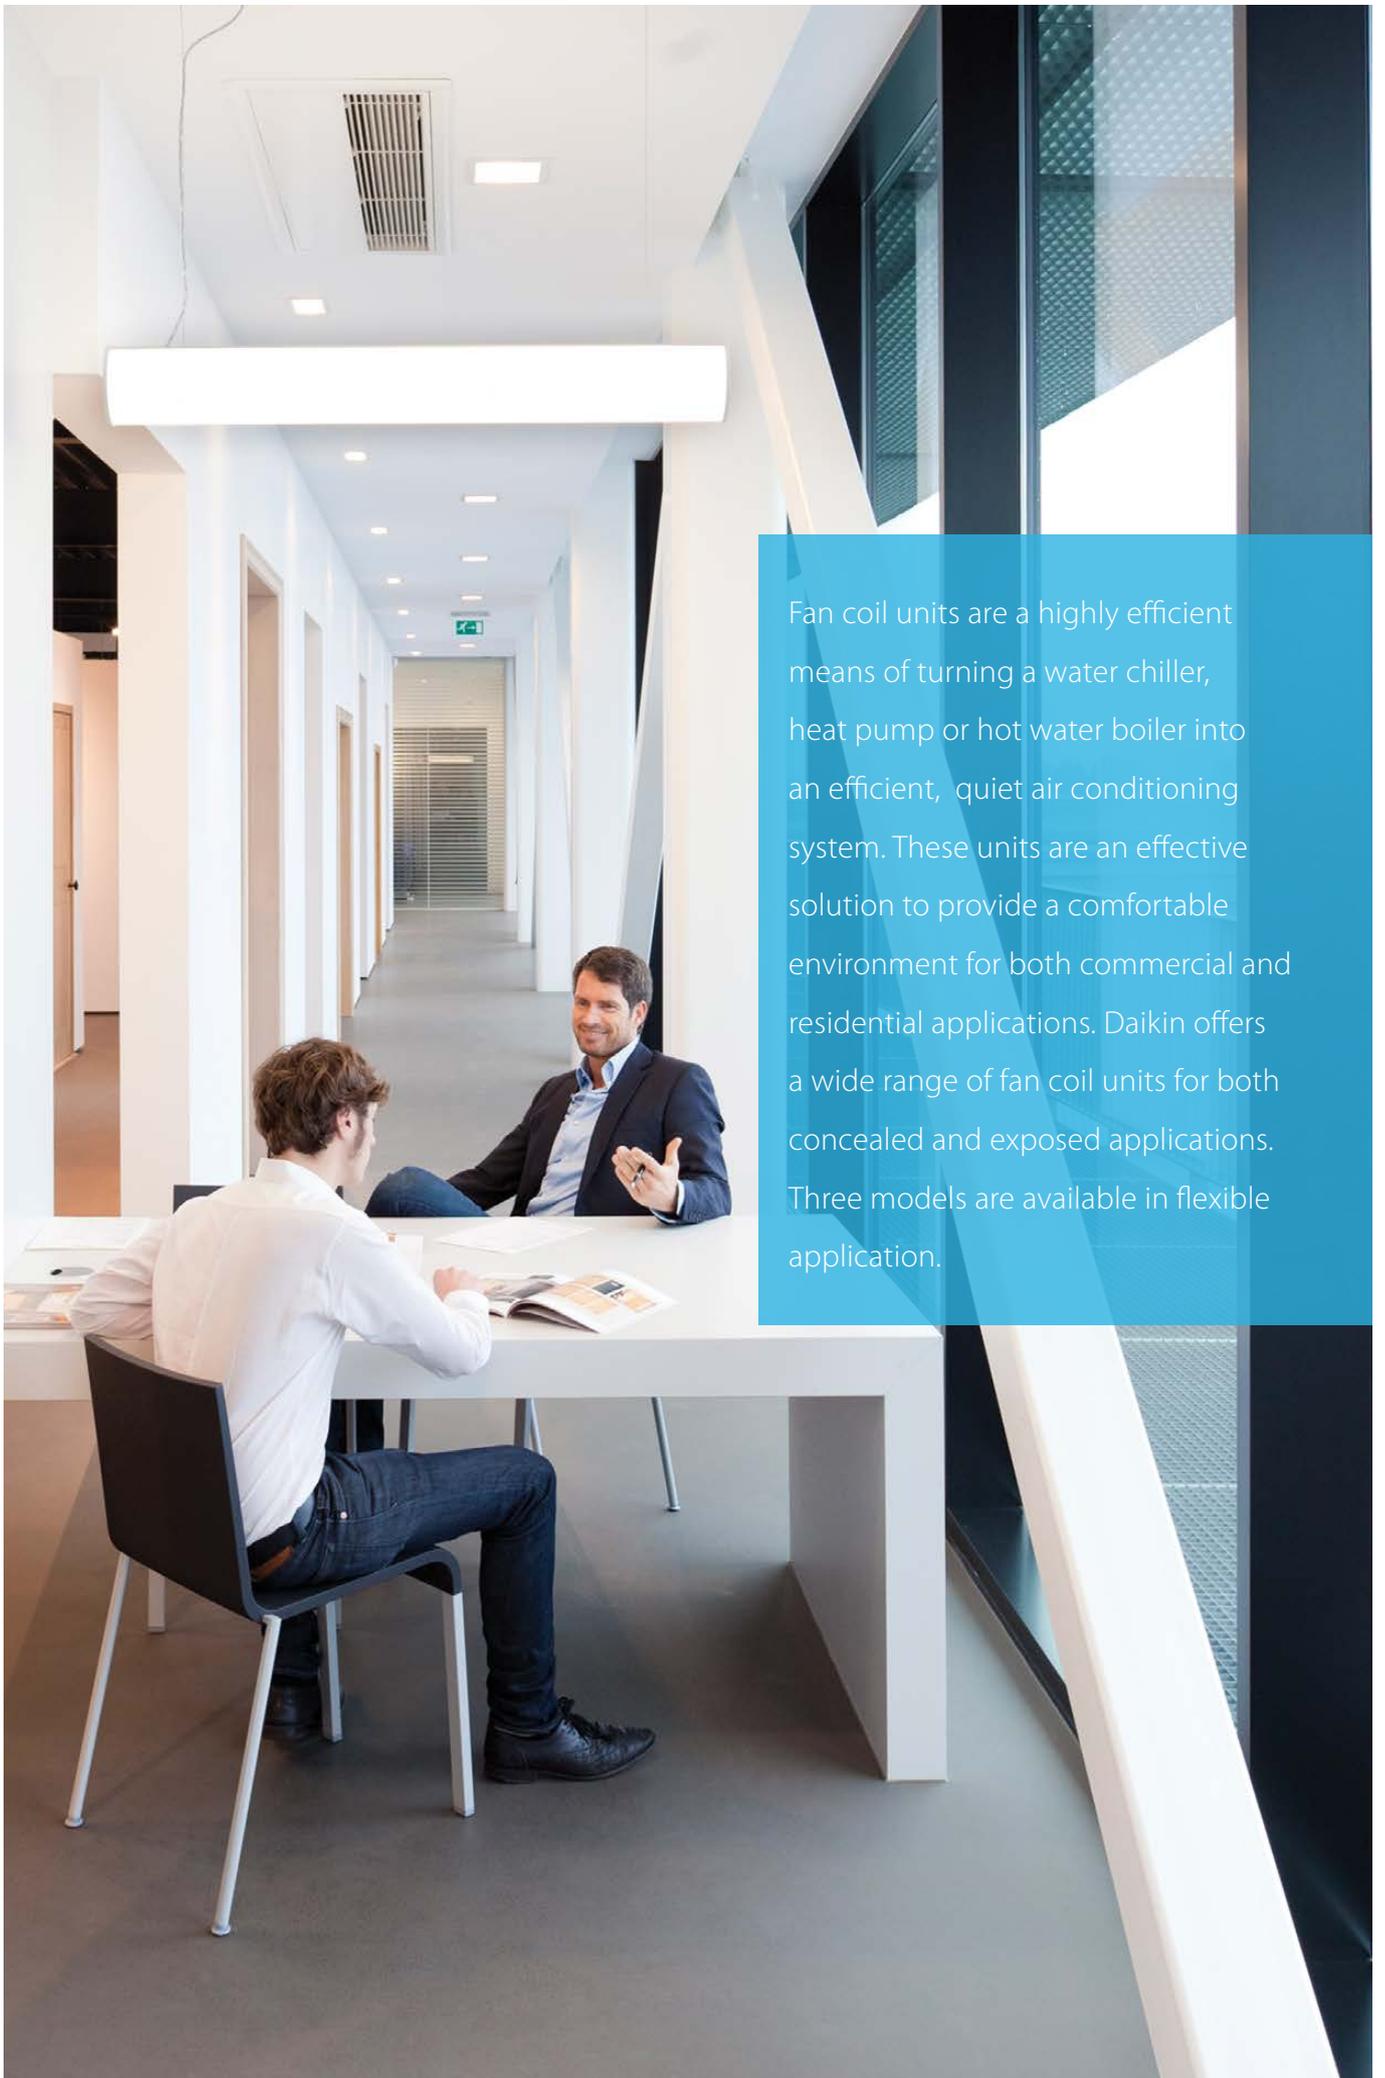

Fan coil units are a highly efficient means of turning a water chiller, heat pump or hot water boiler into an efficient, quiet air conditioning system. These units are an effective solution to provide a comfortable environment for both commercial and residential applications. Daikin offers a wide range of fan coil units for both concealed and exposed applications. Three models are available in flexible application.

Contents

Fan coil units

[Choose Daikin BLDC fan coil units](#) 110

[Products overview fan coil units](#) 114

Cassette units

FWC-BT/BF 116

FWF-BT/BF 117

Floor standing unit

FWZ-AT/AF 118

FWV-DAT/DAF 119

Flexi type units

FWR-AT/AF 120

FWL-DAT/DAF 121

FWS-AT/AF 122

FWM-DAT/DAF 123

Wall mounted unit

FWT-CT 124

Concealed ceiling units

FWP-AT 126 medium ESP

FWB-BT 127 medium ESP

FWD-AT/AF 128 high ESP



Fan coil units with BLDC motor

Designed for tomorrow, available today

As more buildings undergo renovation, the need to be able to deliver high indoor air quality in a specific space in an **economic and cost-effective way** without having to do a radical re-fit of the entire HVAC system has made fan coil technology an obvious solution.

Daikin has a full capacity range of **aesthetically pleasing** fan coil units with advanced controls that reliably deliver **excellent comfort levels**. And by using a refined range of advanced DC fan motors, we are able to offer flexibility while maintaining very low noise levels.

Choose Daikin fan coil units

- The new brushless DC ranges reflect Daikin's commitment to developing highly efficient fan coil units that help to reduce energy consumption, without compromising on reliability and performance.
- Our various factory mounted options or kits provide sufficient flexibility to suit your project needs

Benefits for the installer

- › Reduced amount of sizes: less stock space needed
 - › Modular designs for multiple configurations
 - › Easy integration in BMS system via modbus protocol*
- * except for FWG-AT/AF range

Benefits for the consultant

- › Best solution in the market in order to have top efficiency, best comfort and lowest sound levels

Benefits for the end user

- › High comfort level
- › Up to 70% savings on running costs
- › Controller with timer programmed operating mode

Higher efficiency than AC (alternating current) motor

- › Up to 70% energy savings
- › No heat generation
- › No power losses
- › Higher efficiency than AC motors to reach set point

High comfort level

- › Less fluctuation of air temperature and relative humidity
- › More consistent output level
- › Stepless speed change for gradual air output
- › More accurate adjustments to reach set point

Low sound levels

- › Lower minimum rotation speed
- › No start-stop sequence
- › Gradual air output

High flexibility level

- › Multiple configurations: cassettes, floorstanding units, flexi type units with or without cabinet and ducted units
- › Wide capacity range in heating and cooling
- › Different piping topologies and connection valves



FWR-AT/AF



FWS-AT/AF



FWC-BT/BF






FWP-AT



FWZ-AT/AF

Fan coil units

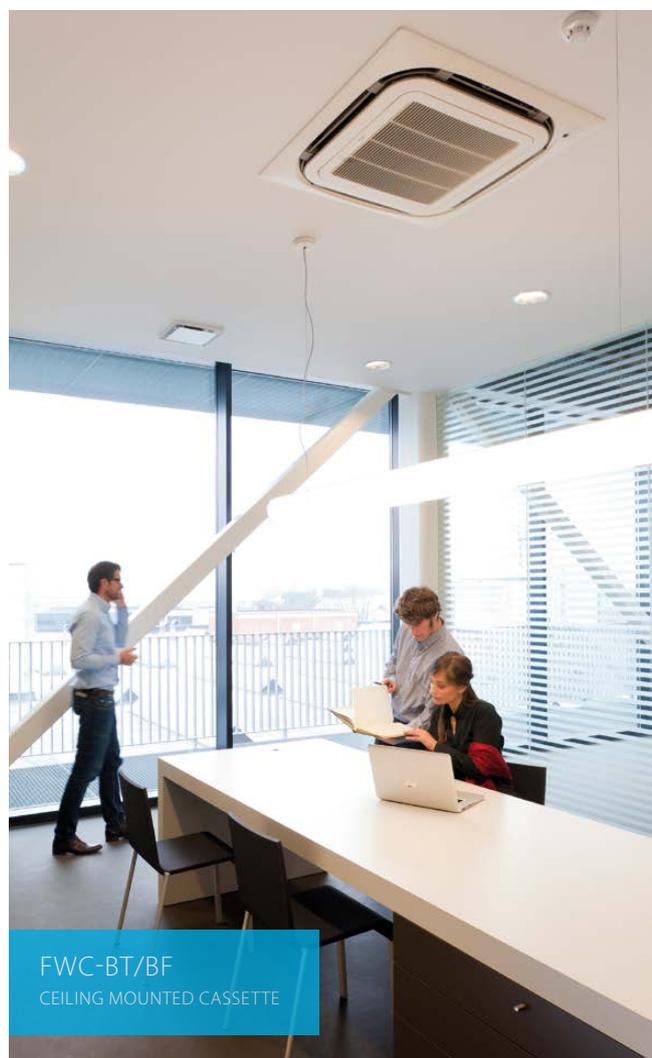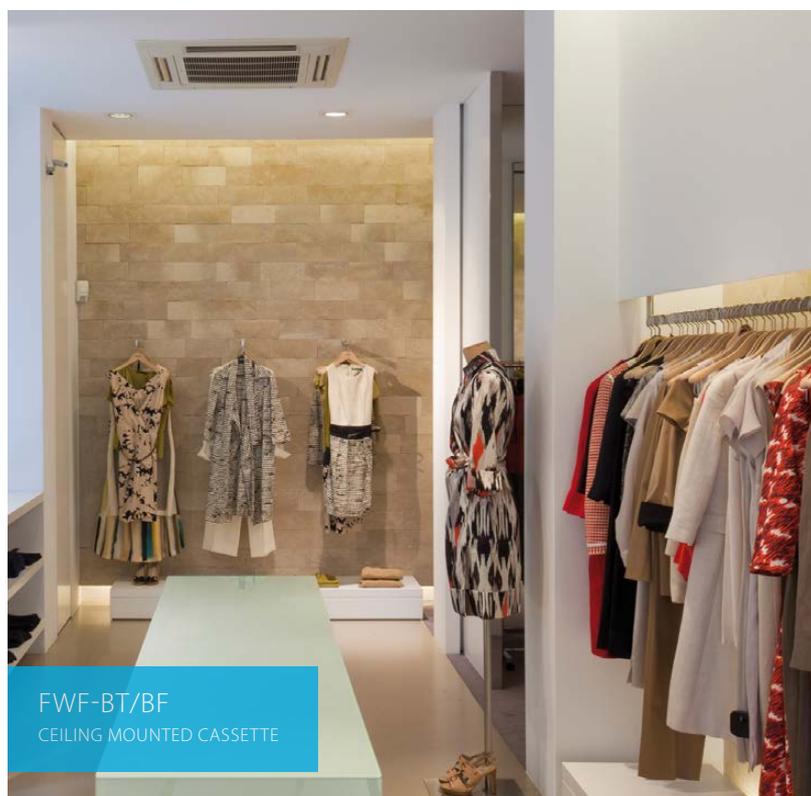

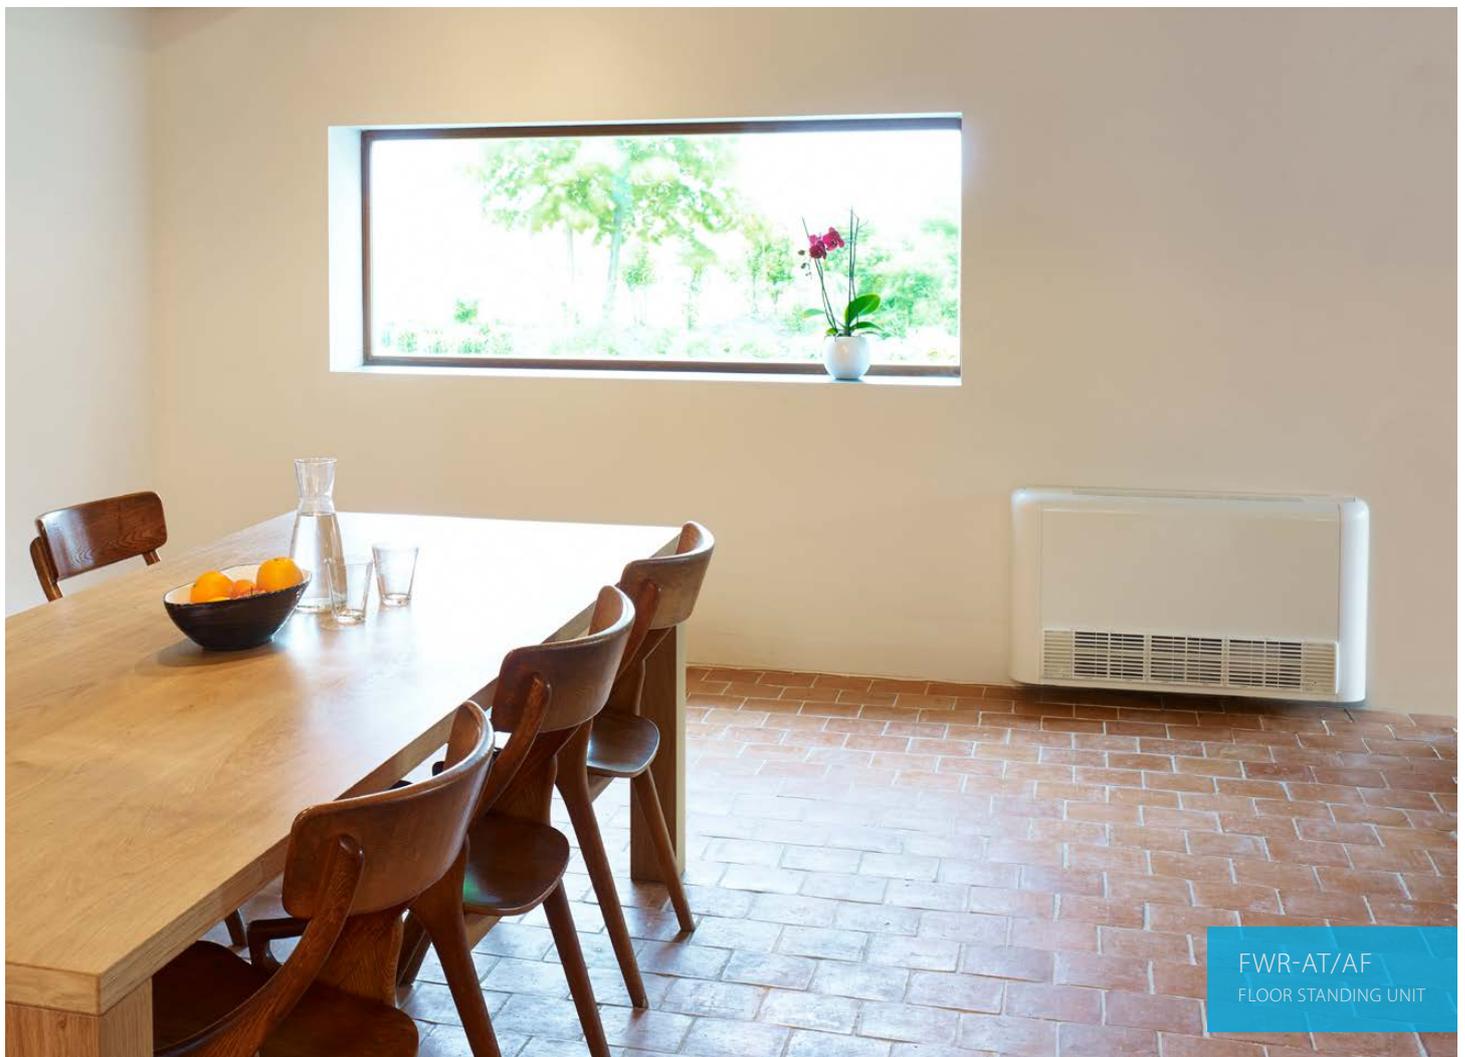

Product overview

Type	Model	Product name	Fan motor type
Ceiling mounted cassette	<p>Round flow cassette</p> <ul style="list-style-type: none"> - Brushless DC fan motor unit for ceiling mounting - 360° air discharge ensures uniform air flow - Integrated fresh air intake - Easy installation in corners - Standard drain pump with 850 mm head 	FWC-BT/BF	BLDC
	<p>4-way blow ceiling mounted cassette</p> <ul style="list-style-type: none"> - AC fan motor unit for ceiling mounting - Integrated fresh air intake - Horizontal auto swing - Easy installation in corners - Standard drain pump with 750 mm head 	FWF-BT/BF	AC
Floor standing unit	<p>Floor standing unit</p> <ul style="list-style-type: none"> - Brushless DC fan motor for vertical mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels 	FWZ-AT/AF	BLDC
	<p>Floor standing unit</p> <ul style="list-style-type: none"> - AC fan motor unit for horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance 	FWW-DAT/DAF	AC
Flexi type unit	<p>Flexi type unit</p> <ul style="list-style-type: none"> - Brushless DC fan motor unit for horizontal or vertical mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels 	FWR-AT/AF	BLDC
	<p>Flexi type unit</p> <ul style="list-style-type: none"> - AC fan motor unit for horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance 	FWL-DAT/DAF	AC
	<p>Concealed flexi type unit</p> <ul style="list-style-type: none"> - Brushless DC fan motor unit for horizontal or vertical concealed mounting - Continuous air flow regulation and fan speed modulation - Up to 70% energy savings - Low sound levels 	FWS-AT/AF	BLDC
	<p>Concealed flexi type unit</p> <ul style="list-style-type: none"> - AC fan motor unit for horizontal or vertical concealed mounting - Insulated valve packages, no extra drain pan required - Fast-on connections for electrical options: no tools needed - Easy maintenance 	FWM-DAT/DAF	AC
Wall mounted unit	<p>Wall mounted unit</p> <ul style="list-style-type: none"> - AC fan motor unit for wall mounting - High aesthetic cabinet design - Optimum air distribution - Easy installation - 3-speed fan motor 	FWT-CT	AC
Concealed ceiling unit	<p>Concealed ceiling unit with medium ESP</p> <ul style="list-style-type: none"> - Brushless DC fan motor unit for horizontal concealed mounting - Instant adjustment to temperature and relative humidity changes - Available static pressure up to 80 Pa - Low sound levels 	FWP-AT	BLDC
	<p>Concealed ceiling unit with medium ESP</p> <ul style="list-style-type: none"> - AC fan motor unit for horizontal concealed mounting - Available static pressure up to 80 Pa - 7-speed electrical motors (thermal protection on windings) - Easy maintenance 	FWB-BT	AC
	<p>Concealed ceiling unit with high ESP</p> <ul style="list-style-type: none"> - AC fan motor unit for horizontal or vertical concealed mounting - Available static pressure up to 120 Pa - Easy maintenance 	FWD-AT/AF	AC


Capacity	1	2	3	4	5	6	7	8	9	10	11	12~	18
Cooling: 2.0 - 5.2 kW Heating: 2.9 - 6.7 kW						•	•	•	•				
Cooling: 2.49 - 4.54 kW Heating: 3.52 - 5.28 kW		•	•	•	•								
Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW		•	•			•		•					
Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW	•	•	•	•			•		•		•		
Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW		•	•			•		•					
Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW	•	•	•	•		•		•		•			
Cooling: 2.64 - 10.08 kW Heating: 2.46 - 11.18 kW		•	•			•		•					
Cooling: 1.46 - 8.02 kW Heating: 1.90 - 10.03 kW	•	•	•	•		•		•		•			
Cooling: 2.43 - 5.28 kW Heating: 3.22 - 7.33 kW		•	•	•	•	•							
Cooling: 2.61 - 6.47 kW Heating: 5.47 - 12.28 kW		•	•	•	•	•	•						
Cooling: 2.61 - 10.34 kW Heating: 5.47 - 18.78 kW		•	•	•	•	•	•	•	•	•			
Cooling: 3.90 - 18.30 kW Heating: 4.05 - 21.92 kW				•		•		•		•		•	•




Round flow cassette

BLDC fan motor unit for ceiling mounting. 360° air discharge

- › 360° air discharge ensures **uniform air flow** and temperature distribution
- › Modern style decoration panel in white (RAL9010)
- › **Fresh air intake integrated** in the same system thus reducing installation cost as no additional ventilation is required
- › Comfortable horizontal air discharge ensures **draught free operation** and prevents ceiling soiling
- › Possibility to shut 1 or 2 flaps for **easy installation in corners**

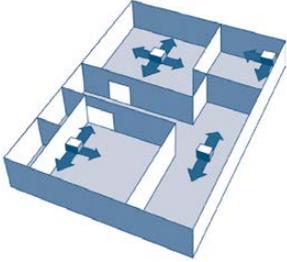

- › Standard drain pump with **850mm head** increases flexibility and installation speed

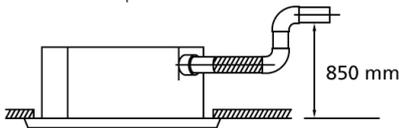


FWC-BT/BF				06	07	08	09	06	07	08	09
				2-pipe				4-pipe			
Cooling capacity	Total capacity	Super high	kW	5.8	6.8	7.7	8.7	5.8	6.6	7.6	8.7
		High	kW	5.0	5.6	6.3	7.2	4.9	5.6	6.3	7.2
		Low	kW	4.1	4.7	4.9	5.7	4.0	4.6	4.8	5.7
	Sensible capacity	Super high	kW	4.1	4.7	5.6	6.5	4.1	4.7	5.6	6.5
		High	kW	3.4	4.0	4.5	5.3	3.4	3.9	4.4	5.2
		Low	kW	2.8	3.3	3.5	4.1	2.7	3.2	3.4	4.0
Heating capacity	2-Pipe	Super high	kW	8.0	8.9	10.6	12.1	-			
		High	kW	6.3	7.1	8.3	9.5	-			
		Low	kW	5.5	5.9	6.9	7.8	-			
	4-Pipe	Super high	kW	-				7.5	8.4	9.7	11.0
		High	kW	-				6.2	6.8	7.8	8.8
		Low	kW	-				5.5	5.9	6.7	7.8
Power input	Super high	W	45	54	77	107	46	55	77	107	
	High	W	40	46	58	76	41	47	59	77	
	Low	W	34	37	39	45	35	38	40	46	
Dimensions	Unit	Height	mm	288							
		Width	mm	840							
		Depth	mm	840							
Weight	Unit	kg	26				29				
Fan	Type	Turbo fan									
	Quantity	1									
	Air flow rate	High	m³/h	1,062	1,236	1,518	1,776	1,032	1,200	1,476	1,746
Low		m³/h	720	840	888	1,044	684	804	852	1,014	
Sound power level	Super high	dB(A)	43	47	53	57	43	47	53	57	
	High	dB(A)	36	39	44	49	36	39	44	49	
Sound pressure level	Super high	dB(A)	29	33	39	43	29	33	39	43	
	High	dB(A)	24	28	32	37	24	28	32	37	
Piping connections	Drain	OD	VP25 (External dia.32 / internal dia. 25)								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240								
Control systems	Infrared remote control	BRC7E532F / BRC7E533F									
	Wired remote control	BRC315D7									

4-way blow ceiling mounted cassette

AC fan motor unit for ceiling mounting. Possibility to shut 1 or 2 flaps

- › Modern style decoration panel in white (RAL9010)
- › Compact casing enables unit to fit flush into ceilings and match standard architectural modules
- › Comfortable horizontal auto swing ensures **draught free operation** and prevents ceiling soiling
- › **Fresh air intake integrated** in the same system thus reducing installation cost as no additional ventilation is required
- › Standard drain pump with **750mm head**

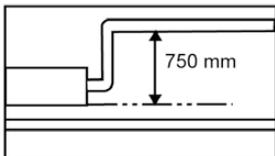

FWF-BT/BF				02	03	04	05	02	03	04	05
				2-pipe				4-pipe			
Cooling capacity	Total capacity	Super high	kW	2.0	3.2	4.2	5.2	2.0	2.7	3.5	4.5
		High	kW	1.7	2.8	3.3	4.0	1.7	2.3	2.8	3.5
		Low	kW	1.5	2.5	2.9	2.9	1.4	1.8	2.6	2.6
	Sensible capacity	Super high	kW	1.5	2.0	2.8	3.5	1.5	1.7	2.4	3.3
		High	kW	1.3	1.7	2.1	2.7	1.3	1.7	2.3	2.3
		Low	kW	1.1	1.4	1.8	1.8	1.1	1.0	1.5	1.5
Heating capacity	2-Pipe	Super high	kW	2.9	4.0	5.4	6.7	-	-	-	-
		High	kW	2.6	3.4	4.1	5.3	-	-	-	-
		Low	kW	2.3	2.8	3.6	3.6	-	-	-	-
	4-Pipe	Super high	kW	-	-	-	-	3.9	3.8	4.9	6.1
		High	kW	-	-	-	-	3.1	3.3	3.9	4.8
		Low	kW	-	-	-	-	2.3	2.8	3.5	3.5
Power input	Super high	W	74	90	118	118	74	94	121	121	
	High	W	67	70	89	89	67	62	74	93	
	Low	W	60	55	62	62	60	55	66	66	
Dimensions	Unit	Height	mm	285							
		Width	mm	575							
		Depth	mm	575							
Weight	Unit	kg	19				20				
Fan	Type	Turbo fan									
	Quantity	1									
	Air flow rate	High	m³/h	468	660	876	876	468	438	618	822
Low		m³/h	318	420	420	318	300	390	390		
Sound power level	Super high	dB(A)	44	50	55	44	46	52	57		
	High	dB(A)	40	44	49	40	42	46	51		
Sound pressure level	Super high	dB(A)	31	40	45	31	33	42	47		
	High	dB(A)	27	33	39	27	29	35	41		
Piping connections	Drain	OD	VP20 (External dia.26 / Internal dia. 20)								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-440								
Control systems	Infrared remote control	BRC7E530 / BRC7E531									
	Wired remote control	BRC315D7									

Floor standing unit

BLDC fan motor unit for vertical mounting. Continuous air flow regulation and fan speed modulation

- › Up to 70% **energy savings** with brushless DC motor technology compared to traditional technology
- › **Instant adjustment** to temperature and relative humidity changes
- › **Low operating sound level**
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Requires **very little installation space**



FWZ-AT/AF				02	03	06	08	02	03	06	08
				2-pipe				4-pipe			
Cooling capacity	Total capacity	Min.	kW	0.61	0.88	1.19	1.79	0.60	0.88	1.19	1.79
		Max.	kW	2.64	4.96	6.32	10.08	2.64	4.96	6.32	10.08
	Sensible capacity	Min.	kW	0.41	0.58	0.79	1.20	0.40	0.58	0.79	1.20
		Max.	kW	1.95	3.60	4.80	7.43	1.95	3.60	4.80	7.43
Heating capacity	2-Pipe	Min.	kW	0.69	0.95	1.29	1.92	-			
		Max.	kW	3.47	6.40	7.51	11.18	-			
	4-Pipe	Min.	kW	-				0.82	1.18	1.76	2.83
		Max.	kW	-				2.46	4.19	6.45	10.06
Power input	Min.	W	2.2		3.4	4.2	2.2		3.24	4.2	
	Max.	W	57.4	82.7	101.4	147	57.4	82.7	101.4	147	
Dimensions	Unit	Height	mm	564							
		Width	mm	774	987	1,194	1,404	774	987	1,194	1,404
		Depth	mm	226				251			
Weight	Unit	kg	20	25	31	41	21	26	33	44	
Heat exchanger	Water volume	l	0.7	1	1.4	2.1	0.7	1	1.4	2.1	
Additional heat exchanger	Water volume	l	-				0.2	0.3	0.4	0.6	
Water flow	Cooling	l/h	454	853	1,084	1,728	454	853	1,084	1,728	
	Heating	l/h	454	853	1,084	1,728	216	367	565	882	
Fan	Type	Centrifugal multi-blade, double suction									
	Quantity	1		2		1		2			
	Air flow rate	Max.	m ³ /h	560	900	1,200	1,660	560	900	1,200	1,660
Min.		m ³ /h	70	95	130	200	70	95	130	200	
Sound power level	Max.	dB(A)	62	70	64	71	62	70	64	71	
Piping connections	Drain	OD	16								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230								
Current input	Max.	A	0.50	0.72	0.88	1.27	0.50	0.72	0.88	1.27	
	Min.	A	0.05		0.07	0.09	0.05		0.07	0.09	
Control systems	Wired remote control	FWEC3A / FWEC3A									

Floor standing unit

AC fan motor unit for vertical mounting

- › **Pre-assembled 3-way/4-port on/off valves** are available
- › **High efficiency** heat exchanger
- › Valve packages are **insulated**, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › **Washable air filter**, easily removable for maintenance
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



FWV-DAT/DAF				01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10												
				2-pipe										4-pipe																					
Cooling capacity	Total capacity	High	kW	1.54	1.74	1.96	2.42	2.93	3.51	4.33	4.77	6.71	8.02	1.46	1.69	1.79	2.38	2.87	3.46	4.26	4.67	6.64	7.88												
		Low	kW	1.04	1.26	1.36	1.60	1.76	1.98	2.51	3.17	3.97	4.11	0.99	1.24	1.26	1.58	1.73	1.96	2.48	3.11	3.93	4.07												
	Sensible capacity	High	kW	1.20	1.30	1.42	1.88	2.11	2.72	3.15	3.65	4.91	5.96	1.14	1.27	1.46	1.85	2.07	2.71	3.09	3.57	4.85	5.85												
		Low	kW	0.79	0.95	1.00	1.18	1.26	1.45	1.80	2.32	2.84	3.05	0.75	0.93	0.98	1.17	1.24	1.44	1.78	2.28	2.82	3.02												
Heating capacity	2-Pipe	High	kW	2.14	2.20	2.57	3.20	3.81	4.78	5.10	5.95	7.83	10.03																						
		Low	kW	1.43	1.71	1.79	2.07	2.28	2.81	2.98	3.96	4.77	5.24																						
	4-Pipe	High	kW											1.90	2.02	2.01	2.92	3.08	4.80	5.05	5.30	7.91	8.35												
		Low	kW											1.50	1.56	2.06	2.18	3.21	3.60	4.04	5.69	5.50													
Power input	High	W	37	53	57	56	98	182	244	37	53	57	56	98	182	244	21	25	24	29	37	38	47	86	109										
	Low	W	21	25	24	29	37	38	47	86	109	21	25	24	29	37	38	47	86	109															
Dimensions	Unit	Height	mm	564																															
		Width	mm	774				987				1,194				1,404				774				987				1,194				1,404			
		Depth	mm					226								251								226								251			
Weight	Unit	kg	19	20	25	30	31	41	20	21	26	32	33	44																					
Heat exchanger	Water volume	l	0.5	0.7	1	1.4	2.1	0.5	0.7	1	1.4	2.1																							
	Additional heat exchanger	Water volume	l											0.2	0.3	0.4	0.6																		
Water flow	Cooling	l/h	264	298	337	415	504	602	743	818	1,152	1,376	250	291	176	409	494	594	730	803	1,138	1,362													
	Heating	l/h	264	298	337	415	504	602	743	818	1,152	1,376	167	177	182	257	270	421	443	465	694	733													
Fan	Type	Centrifugal multi-blade, double suction																																	
	Quantity	1				2				1				2																					
	Air flow rate	High	m³/h	319	344	442	640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362														
Sound power level	High	dB(A)	47	49	50	48	52	53	56	61	67	45	49	50	48	47	51	56	59	60	66														
	Low	dB(A)	178	211	241	320	361	470	570	642	174	205	238	316	356	460	565	636																	
Piping connections	Drain	OD	mm	16																															
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																																
Current input	High	A	0.17	0.24	0.26	0.25	0.44	0.43	0.82	1.10	0.17	0.24	0.26	0.25	0.44	0.43	0.82	1.10																	
	Medium	A	0.13	0.16	0.21	0.20	0.29	0.31	0.57	0.76	0.13	0.16	0.21	0.20	0.29	0.31	0.57	0.76																	
	Low	A	0.10	0.12	0.11	0.14	0.19	0.22	0.39	0.50	0.10	0.12	0.11	0.14	0.19	0.22	0.39	0.50																	
Control systems	Wired remote control	FWEC1A / FWEC2A / FWEC3A / FWEC3A / ECFWMB6																																	

Flexi type unit with cabinet

BLDC fan motor unit for horizontal or vertical mounting.
Continuous air flow regulation and fan speed modulation

- › Up to 70% **energy savings** with brushless DC motor technology compared to traditional technology
- › **Instant adjustment** to temperature and relative humidity changes
- › **Low operating sound level**
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves
- › Requires very **little installation space**



FWR-AT/AF			02				03				06				08			
			2-pipe				4-pipe											
Cooling capacity	Total capacity	Min.	kW	0.61	0.88	1.19	1.79	0.60	0.88	1.19	1.79							
		Max.	kW	2.64	4.96	6.32	10.08	2.64	4.96	6.32	10.08							
	Sensible capacity	Min.	kW	0.41	0.58	0.79	1.20	0.40	0.58	0.79	1.20							
Max.		kW	1.95	3.60	4.80	7.43	1.95	3.60	4.80	7.43								
Heating capacity	2-Pipe	Min.	kW	0.69	0.95	1.29	1.92	-										
		Max.	kW	3.47	6.40	7.51	11.18	-										
	4-Pipe	Min.	kW	-				0.82	1.18	1.76	2.83							
		Max.	kW	-				2.46	4.19	6.45	10.06							
Power input	Min.	W	2.2				2.2											
	Max.	W	57.4	82.7	101.4	147	57.4	82.7	101.4	147								
Dimensions	Unit	Height	mm	564														
		Width	mm	774	987	1,194	1,404	774	987	1,194	1,404							
		Depth	mm	251														
Weight	Unit	kg	21	27	33	44	22	28	35	46								
Heat exchanger	Water volume	l	0.7	1	1.4	2.1	0.7	1	1.4	2.1								
Additional heat exchanger	Water volume	l	-				0.2	0.3	0.4	0.6								
Water flow	Cooling	l/h	454	853	1,084	1,728	454	853	1,084	1,728								
	Heating	l/h	454	853	1,084	1,728	216	367	565	882								
Fan	Type		Centrifugal multi-blade, double suction															
	Quantity		1	2				1	2									
	Air flow rate	Max.	m ³ /h	560	900	1,200	1,660	560	900	1,200	1,660							
Min.		m ³ /h	70	95	130	200	70	95	130	200								
Sound power level	Max.	dB(A)	62	70	64	71	62	70	64	71								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230															
Current input	Max.	A	0.50	0.72	0.88	1.27	0.50	0.72	0.88	1.27								
	Min.	A	0.05		0.07		0.09		0.05									
Control systems	Wired remote control		FWEC3A / FWEC3A															

Flexi type unit with cabinet

AC fan motor unit for horizontal or vertical mounting

- › **Pre-assembled 3-way/4-port on/off valves** are available
- › **High efficiency** heat exchanger
- › Valve packages are **insulated**, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › **Washable air filter**, easily removable for maintenance
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



			FWL-DAT/DAF																										
			01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10							
			2-pipe										4-pipe																
Cooling capacity	Total capacity	High	kW										kW																
		Low	kW										kW																
	Sensible capacity	High	kW										kW																
		Low	kW										kW																
Heating capacity	2-Pipe	High	kW										-																
		Low	kW										-																
	4-Pipe	High	kW										1.90 2.02 2.01 2.92 3.08 4.80 5.05 5.30 7.91 8.35																
		Low	kW										1.50 1.56 2.06 2.18 3.21 3.60 4.04 5.69 5.50																
Power input	High	W		37 53		57 56		98		182 244		W		37 53		57 56		98		182 244									
	Low	W		21 25 24		29		37 38 47		86 109		W		21 25 24		29		37 38 47		86 109									
Dimensions	Unit	Height	mm										564																
		Width	mm			774			987			1,194			1,404			774			987			1,194			1,404		
		Depth	mm										226																
Weight	Unit	kg		20 21		27		32 33		44		21 22		28		24 34 35		46											
Heat exchanger	Water volume	l		0.5 0.7		1		1.4		2.1		0.5 0.7		1		1.4		2.1											
Additional heat exchanger	Water volume	l		-		-		-		-		0.2 0.3		0.4		0.6													
Water flow	Cooling	l/h		264 298 337 415 504 602 743 818 1,152 1,376		250 291 176 409 494 594 730 803 1,138 1,362																							
	Heating	l/h		264 298 337 415 504 602 743 818 1,152 1,376		167 177 182 257 270 421 443 465 694 733																							
Fan	Type	Centrifugal multi-blade, double suction																											
	Quantity	1					2					1					2												
	Air flow rate	High	m³/h		319 344		442 640		706 785 1,011 1,393		307 330 327 432 431 628 690 763 998 1,362																		
	Low	m³/h		178 211		241 320 361 470 570 642 174 205		257 238 316 356 460 565 636																					
Sound power level	High	dBA		47 49 50		48 52 53 56 61 67		45 49 50 48 47 51 56 59 60 66																					
Power supply	Phase/Frequency/Voltage	Hz/V																											
Current input	High	A		0.17 0.24		0.26 0.25		0.44 0.43 0.82 1.10 0.17 0.24		0.26 0.25 0.44 0.43 0.82 1.10																			
	Medium	A		0.13 0.16		0.21 0.20		0.29 0.31 0.57 0.76		0.13 0.16 0.21 0.20 0.29 0.31 0.57 0.76																			
	Low	A		0.10 0.12 0.11		0.14		0.19 0.22 0.39 0.50 0.10 0.12 0.11 0.14		0.19 0.22 0.39 0.50																			
Control systems	Wired remote control	FWEC1A / FWEC2A / FWEC3A / FWECSA / ECFWMB6																											

Flexi type unit without cabinet

BLDC fan motor unit for horizontal or vertical concealed mounting. Continuous air flow regulation and fan speed modulation

- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › Up to 70% **energy savings** with brushless DC motor technology compared to traditional technology
- › **Instant adjustment** to temperature and relative humidity changes
- › **Low operating sound level**
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves



FWS-AT/AF				02	03	06	08	02	03	06	08	
				2-pipe				4-pipe				
Cooling capacity	Total capacity	Min.	kW	0.61	0.88	1.19	1.79	0.60	0.88	1.19	1.79	
		Max.	kW	2.64	4.96	6.32	10.08	2.64	4.96	6.32	10.08	
	Sensible capacity	Min.	kW	0.41	0.58	0.79	1.20	0.40	0.58	0.79	1.20	
		Max.	kW	1.95	3.60	4.80	7.43	1.95	3.60	4.80	7.43	
Heating capacity	2-Pipe	Min.	kW	0.69	0.95	1.29	1.92	-				
		Max.	kW	3.47	6.40	7.51	11.18	-				
	4-Pipe	Min.	kW	-				0.82	1.18	1.76	2.83	
		Max.	kW	-				2.46	4.19	6.45	10.06	
Power input	Min.	W	2.2		3.4	4.2	2.2		3.24	4.2		
	Max.	W	57.4	82.7	101.4	147	57.4	82.7	101.4	147		
Dimensions	Unit	Height	mm	535				535				
		Width	mm	584	794	1,004	1,214	584	794	1,004	1,214	
		Depth	mm	224				224				
Weight	Unit	kg	15	19	23	32	16	20	25	34		
Heat exchanger	Water volume	l	0.7	1	1.4	2.1	0.7	1	1.4	2.1		
Additional heat exchanger	Water volume	l	-				0.2	0.3	0.4	0.6		
Water flow	Cooling	l/h	454	853	1,084	1,728	454	853	1,084	1,728		
	Heating	l/h	454	853	1,084	1,728	216	367	565	882		
Fan	Type	Centrifugal multi-blade, double suction										
	Quantity	1		2		1		2		1,660		
	Air flow rate	Max.	m ³ /h	560	900	1,200	1,660	560	900	1,200	1,660	
Sound power level	Max.	Min.	dB(A)	70	95	130	200	70	95	130	200	
		Max.	dB(A)	62	70	64	71	62	70	64	71	
Piping connections	Drain	OD	17									
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230									
Current input	Max.	A	0.50	0.72	0.88	1.27	0.50	0.72	0.88	1.27		
	Min.	A	0.05		0.07	0.09	0.05		0.07	0.09		
Control systems	Wired remote control	FWEC3A / FWEC3A										

Flexi type unit without cabinet

AC fan motor unit for horizontal or vertical concealed mounting

- › **Pre-assembled 3-way/4-port on/off valves** are available
- › **High efficiency** heat exchanger
- › Valve packages are **insulated**, no extra drain pan required
- › Valve packages contain balancing valves and sensor pocket
- › Fast-on connections for electrical options: no tools needed
- › **Washable air filter**, easily removable for maintenance
- › Electric heater: no relay up to 2kW capacity
- › Electric heater: equipped with two overheat cut-out thermostats



FWM-DAT/DAF			01	15	02	25	03	35	04	06	08	10	01	15	02	25	03	35	04	06	08	10			
			2-pipe										4-pipe												
Cooling capacity	Total capacity	High	kW	1.54	1.74	1.96	2.42	2.93	3.51	4.33	4.77	6.71	8.02	1.46	1.69	1.79	2.38	2.87	3.46	4.26	4.67	6.64	7.88		
		Low	kW	1.04	1.26	1.36	1.60	1.76	1.98	2.51	3.17	3.97	4.11	0.99	1.24	1.26	1.58	1.73	1.96	2.48	3.11	3.93	4.07		
	Sensible capacity	High	kW	1.20	1.30	1.42	1.88	2.11	2.72	3.15	3.65	4.91	5.96	1.14	1.27	1.46	1.85	2.07	2.71	3.09	3.57	4.85	5.85		
		Low	kW	0.79	0.95	1.00	1.18	1.26	1.45	1.80	2.32	2.84	3.05	0.75	0.93	0.98	1.17	1.24	1.44	1.78	2.28	2.82	3.02		
Heating capacity	2-Pipe	High	kW	2.14	2.20	2.57	3.20	3.81	4.78	5.10	5.95	7.83	10.03												
		Low	kW	1.43	1.71	1.79	2.07	2.28	2.81	2.98	3.96	4.77	5.24												
	4-Pipe	High	kW											1.90	2.02	2.01	2.92	3.08	4.80	5.05	5.30	7.91	8.35		
		Low	kW											1.50	1.56	2.06	2.18	3.21	3.60	4.04	5.69	5.50			
Power input	High	W	37	53	57	56	98	182	244	37	53	57	56	98	182	244	37	53	57	56	98	182	244		
	Low	W	21	25	24	29	37	38	47	86	109	21	25	24	29	37	38	47	86	109	21	25	24	29	
Dimensions	Unit	Height	mm	535																					
		Width	mm	584					794					1,004					1,214						
		Depth	mm	224										249											
Weight	Unit	kg	14	15	19	23	32	15	16	20	25	34													
Heat exchanger	Water volume	l	0.5	0.7	1	1.4	2.1	0.5	0.7	1	1.4	2.1													
	Additional heat exchanger	l											0.2	0.3	0.4	0.6									
Water flow	Cooling	l/h	264	298	337	415	504	602	743	818	1,152	1,376	250	291	176	409	494	594	730	803	1,138	1,362			
	Heating	l/h	264	298	337	415	504	602	743	818	1,152	1,376	167	177	182	257	270	421	443	465	694	733			
Fan	Type	Centrifugal multi-blade, double suction																							
	Quantity	1					2					1					2								
	Air flow rate	High	m³/h	319	344	442	640	706	785	1,011	1,393	307	330	327	432	431	628	690	763	998	1,362				
Low		m³/h	178	211	241	320	361	470	570	642	174	205	238	316	356	460	565	636							
Sound power level	High	dB(A)	47	49	50	48	52	53	56	61	67	45	49	50	48	47	51	56	59	60	66				
Piping connections	Drain	OD	17																						
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/230																						
Current input	High	A	0.17	0.24	0.26	0.25	0.44	0.43	0.82	1.10	0.17	0.24	0.26	0.25	0.44	0.43	0.82	1.10							
	Medium	A	0.13	0.16	0.21	0.20	0.29	0.31	0.57	0.76	0.13	0.16	0.21	0.20	0.29	0.31	0.57	0.76							
	Low	A	0.10	0.12	0.11	0.14	0.19	0.22	0.39	0.50	0.10	0.12	0.11	0.14	0.19	0.22	0.39	0.50							
Control systems	Wired remote control	FWEC1A / FWEC2A / FWEC3A / FWECSA																							

Wall mounted unit

AC fan motor unit for wall mounting

- › High **aesthetic cabinet design**
- › **Optimum air distribution**
- › Easy to install
- › 3-speed fan motor
- › **Low operating sound level** thanks to tangential fan
- › Insulated with self-extinguishing class 1 heat insulation
- › Removable washable air filter (self-extinguishing class 1)



FWT-CT				02	03	04	05	06
				2-pipe				
Cooling capacity	Total capacity	High	kW	2.43	2.70	3.31	4.54	5.28
		Low	kW	2.11	2.23	2.78	3.81	4.40
	Sensible capacity	High	kW	1.85	2.02	2.64	3.43	4.10
		Low	kW	1.49	1.61	2.05	2.81	3.28
Heating capacity	2-Pipe	High	kW	3.22	3.52	4.40	6.01	7.33
		Low	kW	2.49	2.70	3.37	4.84	5.86
Power input	High		W	31	32	42	53	72
	Low		W	25	29	33	42	60
Dimensions	Unit	Height	mm	288			310	
		Width	mm	800			1,065	
		Depth	mm	206			224	
Weight	Unit		kg	9			14	
	Operation weight		kg	9.5	9.6		15	
Heat exchanger	Water volume		l	0.52	0.58		0.95	
Water flow	Cooling		l/h	420	460	570	780	910
	Heating		l/h	420	460	570	780	910
Fan	Type			Cross flow fan				
	Quantity			1				
	Air flow rate	High	m ³ /h	442	476	629	866	1,053
Low		m ³ /h	340	374	442	663	782	
Sound power level	High		dBA	45	48	55		59
Sound pressure level	High		dBA	34	35	42		46
Piping connections	Drain	OD	mm	19				
Water connections	Std. heat exchanger		inch	1/2				
Power supply	Phase/Frequency/Voltage		Hz/V	/-/-				
Current input	High		A	0.19	0.20	0.21	0.29	0.34
	Medium		A	0.18	0.20		0.26	0.32
	Low		A	0.17	0.19		0.25	0.31
Control systems	Infrared remote control			WRC-HPC				
	Wired remote control			MERCA / SRC-HPA				



Medium ESP ducted unit

BLDC fan motor unit for horizontal concealed mounting.
Continuous air flow regulation and fan speed modulation

- › **Blends unobtrusively** with any interior décor: only the suction and discharge grills are visible
- › Up to 50% **energy savings** with brushless DC motor technology compared to traditional technology
- › **Instant adjustment** to temperature and relative humidity changes
- › **Low operating sound level**
- › Highly flexible solutions: multiple sizes, piping topologies and connection valves



FWP-AT				02	03	04	05	06	07
				2-pipe					
Cooling capacity	Total capacity	High	kW	2.61	3.14	3.49	5.08	5.45	6.47
		Low	kW	1.34	1.5	1.67	2.12	2.43	2.67
	Sensible capacity	High	kW	1.88	2.16	2.34	3.6	3.87	4.4
		Low	kW	0.95	1.02	1.1	1.52	1.67	1.78
Heating capacity	2-Pipe	High	kW	5.47	6.01	6.47	10.31	11.39	12.28
		Low	kW	2.77	2.91	3.00	4.56	4.77	4.94
	4-Pipe	High	kW		3.14			5.99	
		Low	kW		1.95			3.38	
Power input	High		W		46.4			80	
	Low		W		12.2			17.5	
Dimensions	Unit	Height	mm	239					
		Width	mm	1,039		1,389			
		Depth	mm	609					
Weight	Unit		kg	23	24	26	31	33	35
	Operation weight		kg	24	26	28	33	35	38
Heat exchanger	Water volume		l	1.1	1.5	2.2	1.6	2.1	3.2
Additional heat exchanger	Water volume		l	0.4			0.6		
Water flow	Cooling		l/h	448	539	598	873	936	1,111
	Heating		l/h	480	527	567	904	999	1,077
	Additional heat exchanger		l/h	275			526		
Water pressure drop	Additional heat exchanger		kPa	3			5		
Fan	Type	Centrifugal - forward blades - directly coupled on fan motor							
	Quantity	1							
	Air flow rate	High	m ³ /h	400			800		
		Low	m ³ /h	180			300		
Available pressure	High	Pa	71			65			
Sound power level	High		dB(A)	55.6			60.6		
Sound pressure level	High		dB(A)	44.1			49.1		
Electric heater	Power input		kW	2			2.5		
Piping connections	Drain	OD	mm	16					
Water connections	Std. heat exchanger		inch	3/4					
	Add. heat exchanger		inch	3/4					
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230					
Control systems	Wired remote control			FWEC3A / FWEC3A					

Medium ESP ducted unit

AC fan motor unit for horizontal concealed mounting

- › **Compact dimensions**, can easily be mounted in a narrow ceiling void
- › 3, 4 or 6 stage row cooling coil
- › Drain pan to collect the condensate from: heat exchanger and regulating valves
- › **7-speed electrical motors** (with thermal protection on windings)
- › All 7 speeds **pre-wired in the factory** in the terminal block of the switch box
- › **Washable air filter**, easily removable for maintenance



				FWB-BT	02	03	04	05	06	07	08	09	10	
				2-pipe										
Cooling capacity	Total capacity	High	kW	2.61	3.14	3.49	5.08	5.45	6.47	7.57	8.67	10.34		
		Low	kW	1.34	1.50	1.67	2.12	2.43	2.67	4.18	4.64	5.35		
	Sensible capacity	High	kW	1.88	2.16	2.34	3.6	3.87	4.4	5.23	5.96	6.9		
		Low	kW	0.95	1.02	1.1	1.52	1.67	1.78	2.95	3.21	3.57		
Heating capacity	2-Pipe	High	kW	5.47	6.01	6.47	10.31	11.39	12.28	15.05	16.85	18.78		
		Low	kW	2.77	2.91	3.00	4.56	4.77	4.94	8.63	9.29	9.85		
	4-Pipe	High	kW				3.14				5.99			12.8
		Low	kW				1.95				3.38			7.67
Power input	High	W				79				154			294	
	Low	W				28				64			155	
Dimensions	Unit	Height	mm							239				
		Width	mm							1,389			1,739	
		Depth	mm							609				
Weight	Unit	kg	23	24	26	31	33	35	43	45	48			
	Operation weight	kg	24	26	28	33	35	38	45	48	52			
Heat exchanger	Water volume	l	1.1	1.5	2.2	1.6	2.1	3.2	2.1	2.8	4.2			
	Additional heat exchanger	l	0.4			0.6			1.7					
Water flow	Cooling	l/h	448	539	598	873	936	1,111	1,299	1,488	1,774			
	Heating	l/h	480	527	567	904	999	1,077	1,319	1,479	1,647			
	Additional heat exchanger	l/h	275			526			1,123					
Water pressure drop	Additional heat exchanger	kPa	3			5			8					
Fan	Type	Centrifugal - forward blades - directly coupled on fan motor												
	Quantity	1												
	Air flow rate	High	m³/h	400			800			1,200				
		Low	m³/h	180			300			600				
Available pressure	High	Pa	71			65			59					
Sound power level	High	dB(A)	56			59			69					
Sound pressure level	High	dB(A)	44.5			47.5			57.5					
Electric heater	Power input	kW	2			2.5			3					
Piping connections	Drain	OD	mm			16								
Water connections	Std. heat exchanger	inch				3/4								
	Add. heat exchanger	inch				3/4			1					
Power supply	Phase/Frequency/Voltage	Hz/V				1~/50/230								
Current input	High	A	0.36			0.73			1.28					
	Medium	A	0.21			0.60			0.90					
	Low	A	0.14			0.33			0.70					
Control systems	Wired remote control	FWEC1A / FWEC2A / FWEC3A / FWEC3A												

High ESP ducted unit

AC fan motor unit for horizontal or vertical concealed mounting

- › Straight duct connector mounted to discharge side
- › **Washable air filter**, easily removable for maintenance



FWD-AT/AF			04	06	08	10	12	16	18	04	06	08	10	12	16	18			
			2-pipe						4-pipe										
Cooling capacity	Total capacity	High	kW	3.90	6.20	7.80	8.82	11.90	16.40	18.30	3.90	6.20	7.80	8.82	11.90	16.40	18.30		
	Sensible capacity	High	kW	3.08	4.65	6.52	7.16	9.36	12.80	14.10	3.08	4.65	6.52	7.16	9.36	12.80	14.10		
Heating capacity	2-Pipe	High	kW	4.05	7.71	9.43	10.79	14.45	19.81	21.92	-								
	4-Pipe	High	kW	-						4.49	6.62	9.21	15.86	21.15					
Power input	High		W	234	349	443	714	1,197			234	349	443	714	1,197				
	Low		W	130	247	261	328	704			130	247	261	328	704				
Dimensions	Unit	Height	mm	280				352				280				352			
		Width	mm	754	964	1,174		1,384				754	964	1,174		1,384			
		Depth	mm	559				718				559				718			
Weight	Unit	kg	33	41	47	49	65	77	80	35	43	50	52	71	83	86			
Heat exchanger	Water volume		l	1.06	1.42	1.79	2.38	2.5	4.02	5.03	1.06	1.42	1.79	2.38	2.50	4.02	5.03		
Additional heat exchanger	Water volume		l	-						0.35	0.47	0.59		1.42	1.72				
Water flow	Cooling		l/h	674	1,064	1,339	1,514	2,056	2,833	3,140	674	1,064	1,339	1,514	2,056	2,833	3,140		
	Heating		l/h	674	1,064	1,339	1,514	2,056	2,833	3,140	349	581	808		1,392	1,856			
Fan	Type			Centrifugal multi-blade, double suction															
	Quantity			1	2				1				2						
	Air flow rate	High	m ³ /h	800	1,250	1,600		2,200	3,000		800	1,250	1,600		2,200	3,000			
	Available pressure	High	Pa	66	58	68	64	97	145	134	63	53	63	59	92	138	128		
Sound power level	High	dB(A)	66	69	72		74	78		66	69	72		74	78				
Piping connections	Drain	OD	mm	16															
Water connections	Std. heat exchanger		inch	3/4				1				3/4				1			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/230															
Current input	High		A	0.95	1.58	1.97		3.21	5.37		0.95	1.58	1.97		3.21	5.37			
	Medium		A	0.74	1.39	1.52		2.08	4.38		0.74	1.39	1.52		2.08	4.38			
	Low		A	0.57	1.18	1.20		1.50	3.26		0.57	1.18	1.20		1.50	3.26			
Control systems	Wired remote control			FWEC1A / FWEC2A / FWEC3A / FWEC3A															





Daikin air handling units, with their Plug & Play design and inherent flexibility, can be configured and combined specifically to meet the exact requirements of any building, no matter what it is used for or who is to work there. Our systems are designed to be the most environmentally friendly and the most energy efficient on the market, thus reducing their ecological impact, while, at the same time, keeping costs down through the minimisation of energy consumption. When combined with the small physical footprint of the system, these features make our air handling units ideal for all markets.

Contents

Air handling units

Always choose Daikin air handling units	132
Software and Eurovent certification	136
Modular	137
Fresh air package	138



Daikin air handling units

Always choose Daikin air handling units

- Energy efficiency and indoor air quality
- Wide range of air handling units
- **High quality** in component selection
- **Innovative** technology
- Operation **efficiency** and energy **savings**
- Outstanding **reliability** and **performance**
- Various applications are possible including air conditioning applications, industry-type process cooling, and large-scale district heat source systems.

Benefits for the installer

- › Easy commissioning through pre-programmed DDC controller and external terminal connection avoiding drilling into unit panels
- › Internal electrical wiring saves installation time
- › Flush mounted electrical control panel avoids risk of damage during transportation and installation

Benefits for the consultant

- › In-house developed ASTRA software with improved user interface allowing for a professional report in a few clicks

Benefits for the end user

- › Higher degree of control than ever before, allowing the user to determine a wide range of settings, resulting in excellent operational flexibility
- › Fully integrated electrical panel for units taller than 80cm

Marketing tools

- › Watch the time-lapse video of a Daikin AHU construction on www.youtube.com/daikineurope
- › Brochure on air handling units as a combined solution with refrigeration and chillers on commercial applications



Packaged control solution for Daikin AHU

- › Electrical control panel complete with Direct Digital Control (DDC) controller
- › Internal fitting of all sensors & pressure measurements devices
- › Built-in temperature, humidity and CO₂ sensors
- › Internal electrical wiring for all components

Energy efficient while focusing on maximum comfort

- › Set points can be specified for supply, return or room temperature
- › Control of all AHU components such as mixing dampers, heat recovery wheels, water valves, pressure switches for filters and fans, fan motors and inverters

Plug & Play design

- › Low voltage fast connectors in between AHU sections

Easy start-up and commissioning

- › Pre-programmed and factory-tested controls ensuring all wiring is installed correctly
- › Reduced energy and operating costs




Air handling units





COMMERCIAL AND INDUSTRIAL APPLICATIONS

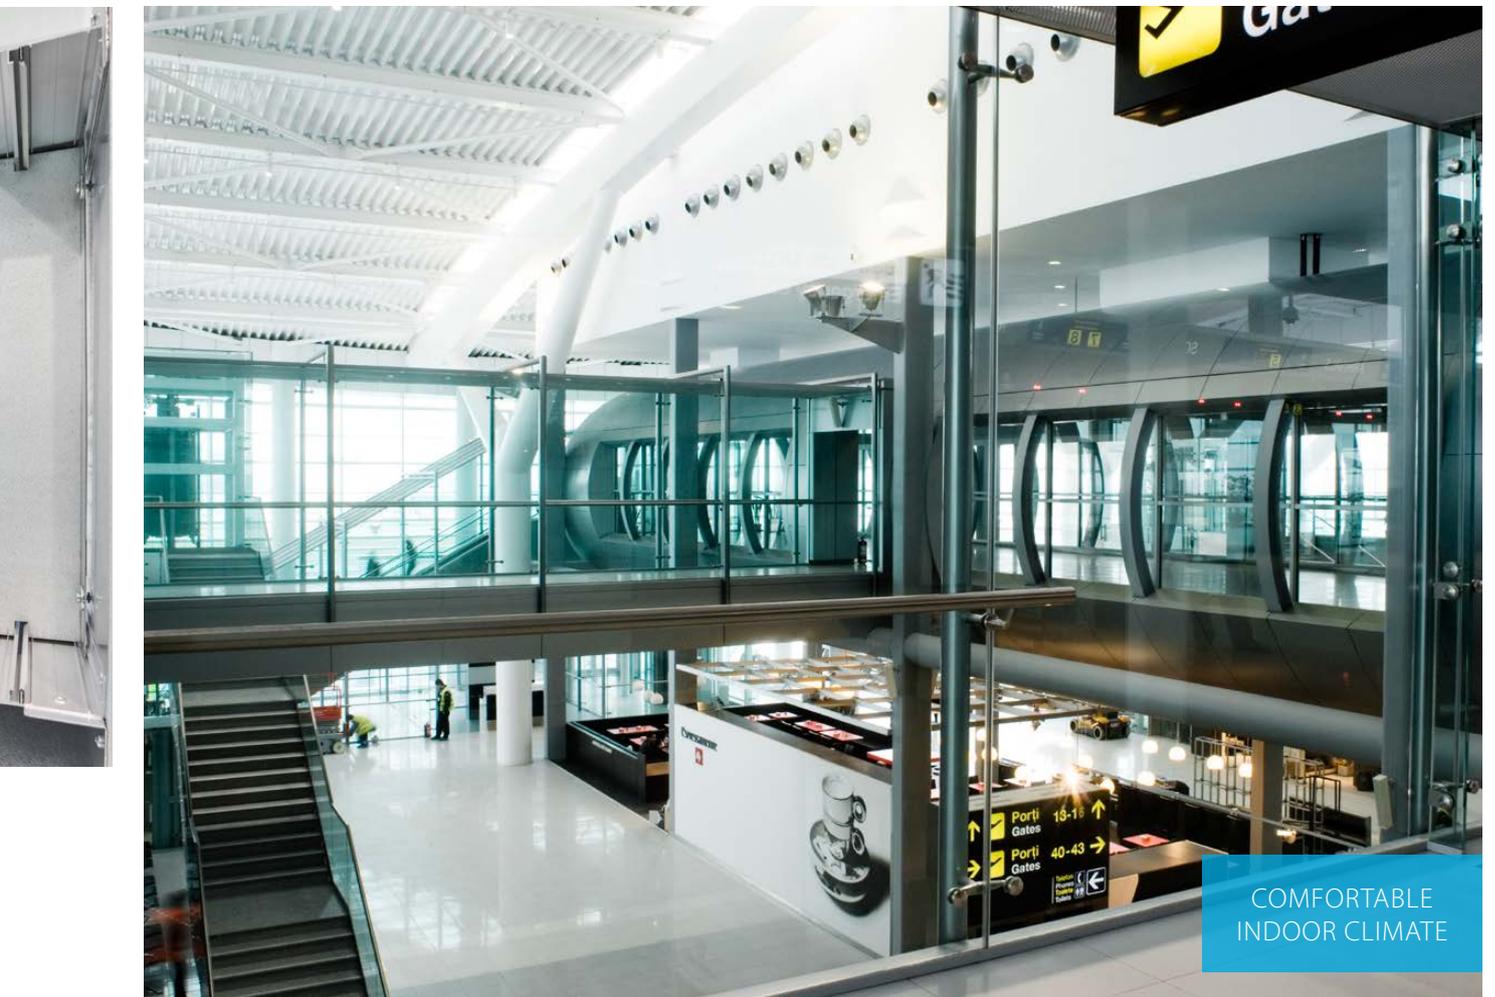

COMFORTABLE INDOOR CLIMATE


Software

ASTRA Pro

ASTRA is the powerful software that Daikin has developed to offer a **quick** and **comprehensive service** for the customer, to facilitate finding the right balance of **performance and cost** in an air handling unit. It is a complete tool that can configure any type of product and respond exactly to the strictest design needs. The result is a comprehensive **economic** offer including all the technical data and drawings, the psychrometric diagram with the relative air treatment and the fans' performance curves. However, Daikin didn't stop there, they went further.

MECCANO is the other powerful software developed and designed to quickly **convert the offer in the executive order**. Technical drawings to be sent and approved by the client, executive drawings for the production, bill of material, code generation for each component used are just a few of the many functions of the instrument.

The ASTRA-MECCANO integration has therefore made possible the complete automated management of the process by **reducing the time of the offer** and of the delivery and improving the service to our customers.

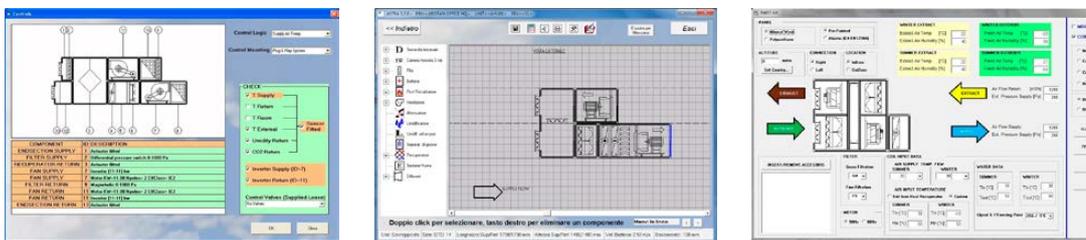

ASTRA Xpress

- › Quick AHU selection that will save you precious time, drastically reducing selection time through the new software interface.
- › Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- › High selection quality, thanks to the huge number of the pre-engineered units embedded within the software.

4 steps to configure an air handler in just 2 minutes

- 1 Select a configuration
- 2 Select coils
- 3 Select other components
- 4 Design conditions ----> Print report

Eurovent certification

Daikin is participating in the Eurovent Certification Programme for Air Handling Units. They are certified under the number 11.05.003 and presented on www.eurovent-certification.com



Daikin air handling units	Result sp65	Eurovent Classification according to EN1886					
Casing mechanical strength	D1	Casing mechanical strength					
		Casing Class	D1	D2	D3		
Casing air leakage Negative pressure -400 Pa	L1	Maximum relative deflection mm x m ⁻¹	4.00	10.00	EXCEEDING10		
		Casing air leakage Negative pressure -400 Pa					
Casing air leakage Positive pressure +700 Pa	L1	Leakage Class	L1	L2	L3		
		Maximum leakage rate (f _{avg}) l x s ⁻¹ x m ²	0.15	0.44	1.32		
Filter bypass leakage	F9	Casing air leakage Positive pressure +700 Pa					
		Leakage Class	L1	L2	L3		
Thermal transmittance	T2	Maximum leakage rate (f _{avg}) l x s ⁻¹ x m ²	0.22	0.63	1.90		
		Filter bypass leakage					
Thermal bridging of the casing	TB2	Filter Class	F9	F8	F7	F6	G1 TO F5
		Maximum filter bypass leakage rate k in % of the volume flow rate	0.50	1	2	4	6
		Thermal transmittance					
		Class	T1	T2	T3	T4	T5
		Thermal transmittance (U) W/m ² x K	U <= 0.5	0.5 < U <= 1	1 < U <= 1.4	1.4 < U <= 2	No requirements
		Thermal Bridging of the casing					
		Class	TB1	TB2	TB3	TB4	TB5
		Thermal bridging facto (kb) W x m ² x K ⁻¹	0.75 < K _b <= 1	0.6 < K _b <= 0.75	0.45 < K _b <= 0.6	0.3 < K _b <= 0.45	No requirements

Modular

High-end solution with heat recovery

Energy efficiency and indoor air quality

- › Predefined sizes
- › IE4 premium efficiency motor
- › High efficiency heat wheel (heat recovery)
- › Compact design
- › Advanced control features
- › Easy installation
- › Indoor air quality compliant with VDI 6022 hygiene guideline
- › Operating limits from -25 °C, -40 °C with electric heaters, up to +46 °C ambient temperature
- › VRV IV and ERQ coupling capability
- › Indoor and outdoor versions
- › Free cooling capability
- › Economy and Night mode operation
- › Monitoring and control through Daikin ITM



EC Fan

- › Air flow or pressure control (Variable Air Volume - Constant Air Volume)
- › Nominal air flow programmed at factory
- › Quiet operation

Simple, quick installation

The Modular series' Plug & Play design is more than just a convenient feature for installers. It offers cost-saving benefits as there is no need for expensive adjustments before the unit is commissioned. Plug & Play makes everyone's life simpler, safer and more economical.

		ADT-F/B	1	2	3	4	5	6	7	8	9	10
Airflow	m ³ /h		1,200	1,700	2,700	4,100	5,500	6,100	7,000	9,100	11,500	15,000
Temp. efficiency winter	%		81.3	81.1	81.2	81.6	80.7	81.2	82.7	81.8	81.5	81.9
External static pressure	Nom. Pa		200	200	200	200	200	200	200	200	200	200
Current	Nom. A		2.66	3.90	6.30	2.98	4.00	4.74	4.76	6.34	8.72	10.2
Power input	Nom. kW		0.62	0.89	1.50	1.98	2.68	2.96	3.30	4.28	5.48	7.04
SFPv	kW/m ³ /s		1.87	1.89	1.99	1.74	1.75	1.75	1.70	1.69	1.72	1.69
Electrical supply	Phase	ph	1	1	1	3+N	3+N	3+N	3+N	3+N	3+N	3+N
	Frequency	Hz	50	50	50	50	50	50	50	50	50	50
	Voltage	V	230	230	230	400	400	400	400	400	400	400
Dimensions unit	Length	mm	1,700	1,700	1,800	1,920	2,080	2,280	2,400	2,450	2,280	2,400
	Depth	mm	720	820	990	1,200	1,400	1,400	1,600	1,940	1,940	2,300
	Height overall	mm	1,320	1,320	1,540	1,740	1,740	1,920	1,920	2,180	2,460	2,570
Weight unit	kg		325	350	475	575	750	790	950	1,330	1,410	1,750
Sound level	Lp dB(A)*		40	42	42	45	46	44	43	43	45	45

* Sound pressure level radiated from unit at 1 meter and according to ISO 3744 (supply outlet ducted)

Air handling unit application

Daikin Fresh Air package


The Daikin fresh air package provides a complete solution, including all unit controls (expansion valve, control box and an AHU controller) and sensors factory mounted and configured. This unique solution allows for Plug & Play connection of our AHU series to Daikin ERQ and VRV condensing units.

High efficiency

Daikin heat pumps are renowned for their high energy efficiency. Integrating the AHU with a heat recovery system is even more effective since an office system can frequently be in cooling mode while the outdoor air is too cold to be brought inside in an unconditioned state. In this case heat from the offices is merely transferred to heat up the cold incoming fresh air.

High comfort levels

Daikin ERQ and VRV units respond rapidly to fluctuations in supply air temperature, resulting in a steady indoor temperature and resultant high comfort levels for the end user. The ultimate is the VRV range which improves comfort even more by offering continuous heating, also during defrost.

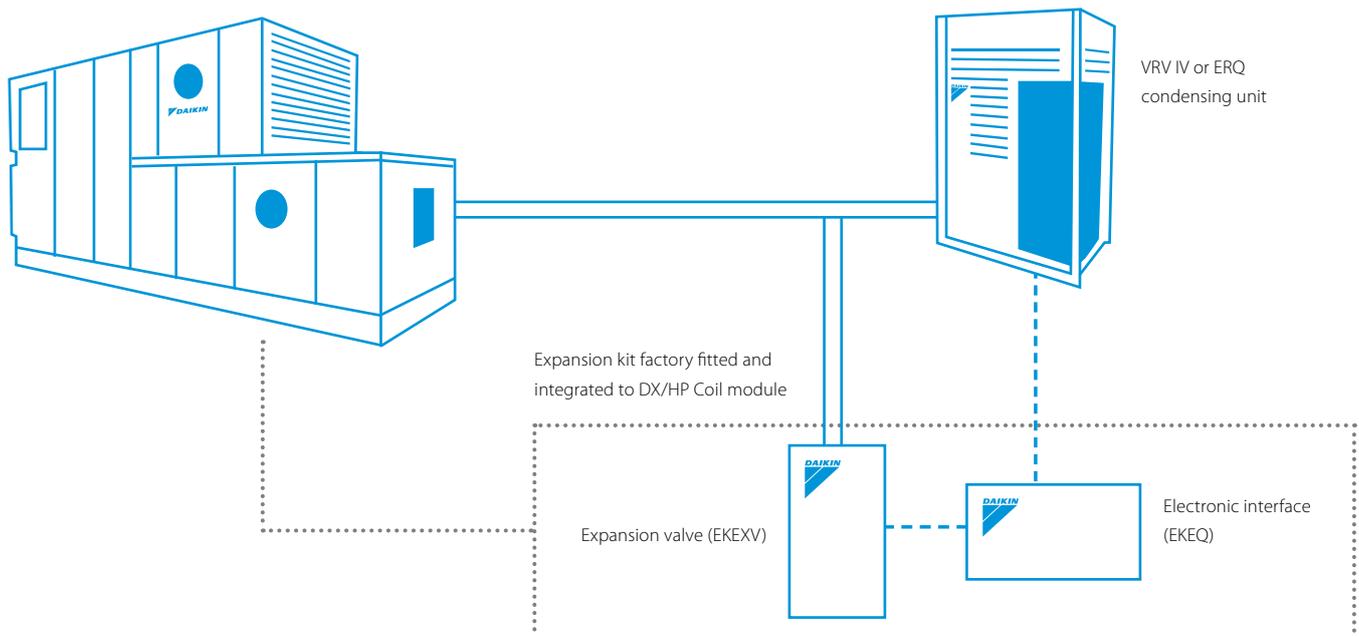


Please refer to our VRVIV and ERQ inverter driven condensing unit ranges which are fully compatible with the Modular AHU




Contents

Control Systems

Mini building management system	
 Intelligent Manager	142
Standard protocol interfaces	
Modbus interface	144
BACnet Interface	148
LonWorks Interface	149

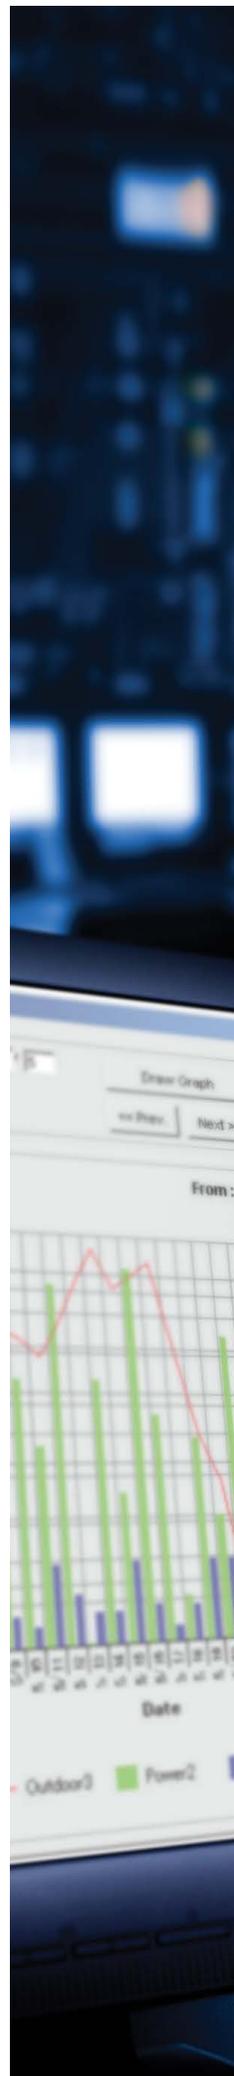

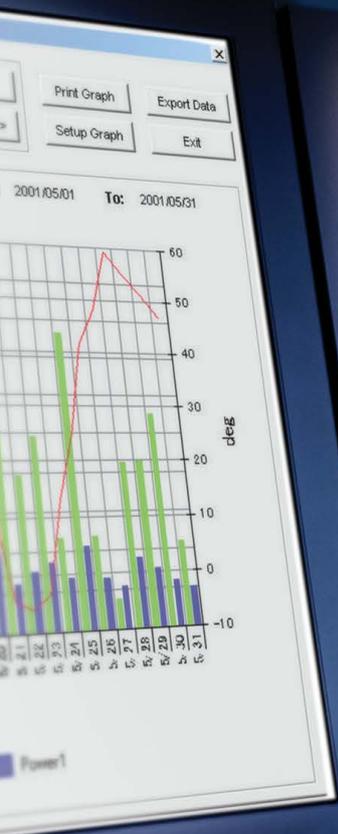

Dalton Altierra Flow 1.0.1 - Central 7.4.6 - Project

Indoor Units Outdoor Units Pipes

Edit Outdoor Unit Selection

System

Name:

Model: EMP2(SA441) Select Options...

PS: 4000 Stages

Combination %: Actual: 80%

Capacity Index: Maximum for model: 520 Actual: 320

Design conditions

Heating: Cooling: Heat load: 36,3kW Cool load:

Available capacities

Heating: 37,9kW Integrated capacity at Tdes

PI heating: 15,4kW Full load PI at Ta 7°C (44,8°F)

Cooling: 40,9kW

Piping

Enter individual piping lengths manually

Equivalent piping length:

First branch to indoor units:


Position of outdoor unit relative to indoor units

Higher Same level Lower

Drag and drop outdoor units from the "Available indoor units" list onto the outdoor unit or a header to connect the units. Or the opposite to disconnect the units. Click the command buttons to insert headers, with a given number of connections.

The outdoor unit is on the same level as the indoor units

All defined outdoor units and indoor units


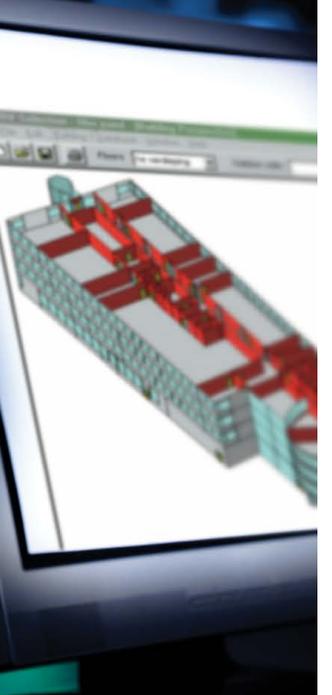


Mini BMS

with full integration across all product pillars

- Price competitive mini BMS
- Cross-pillar integration of Daikin products
- Integration of third party equipment

System overview

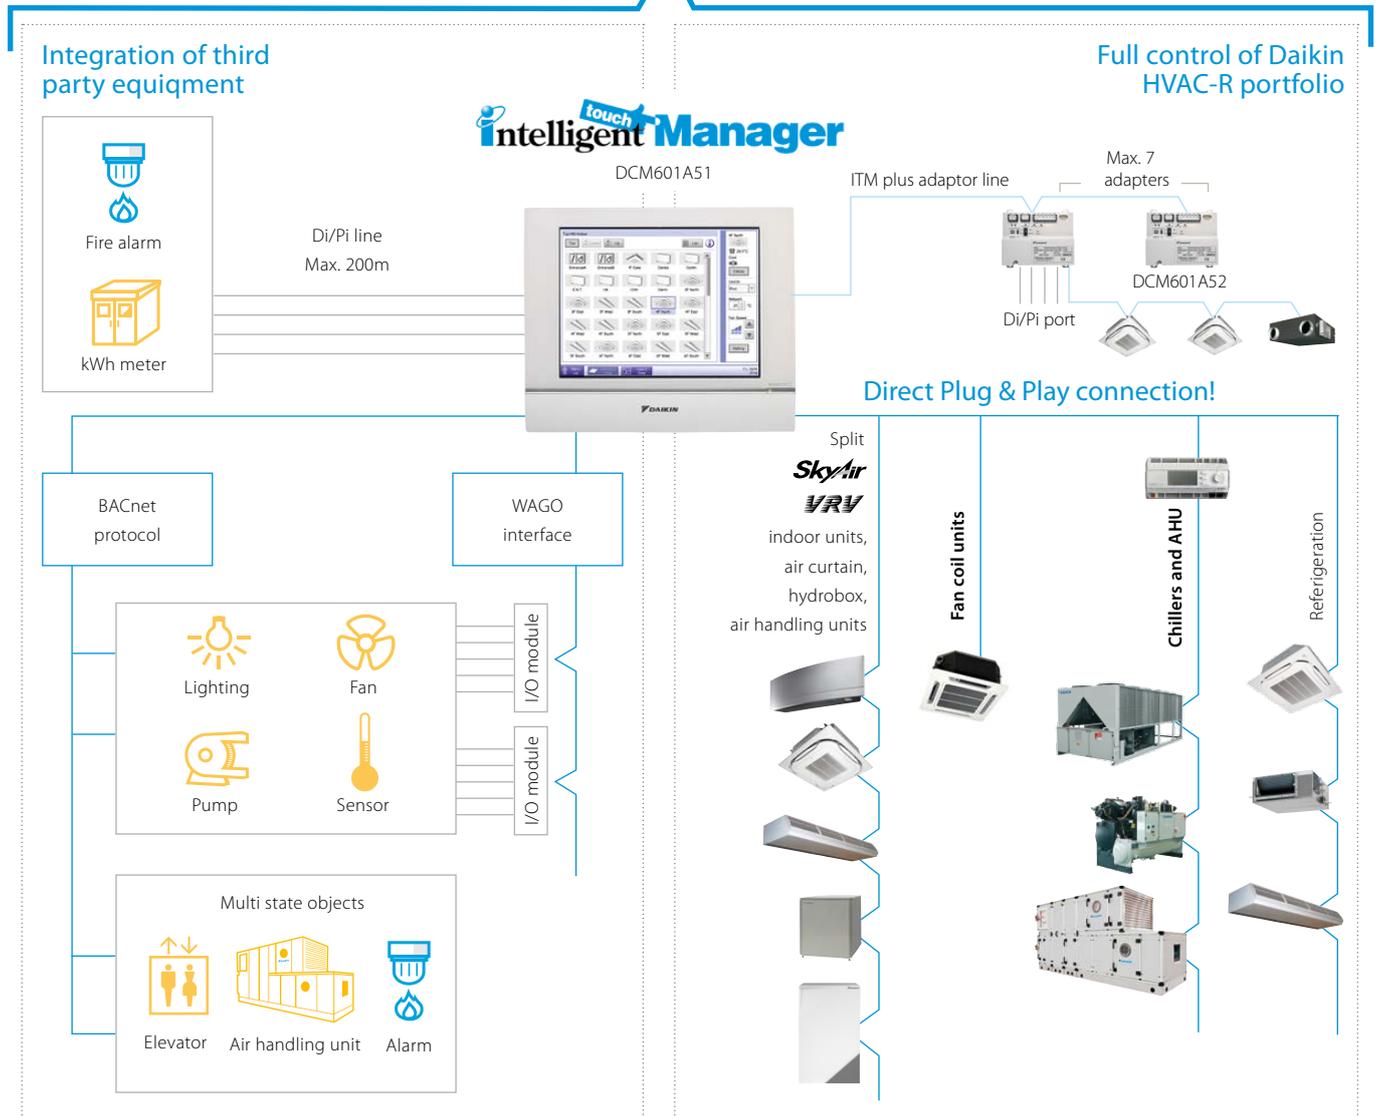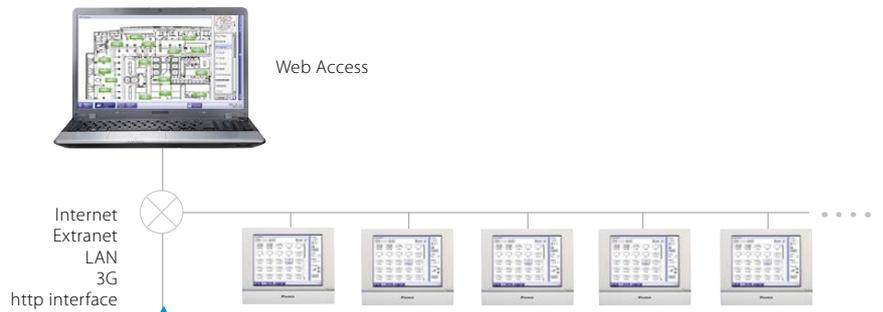



User friendliness

- › Intuitive user interface
- › Visual lay out view and direct access to indoor unit main funtions
- › All functions direct accessible via touch screen or via web interface

Smart energy management


- › Monitoring if energy use is according to plan
- › Helps to detect origins of energy waste
- › Powerful schedules guarantee correct operation throughout the year
- › Save energy by interlocking A/C operation with other equipment such as heating

Flexibility

- NEW** › Cross-pillar integration (heating, air conditioning, applied systems, refrigeration, air handling units)
- NEW** › BACnet protocol for 3rd party products integration
- › I/O for integration of equipment such as lights, pumps... on WAGO modules
- › Modular concept for small to large applications
- › Control up to 2,560 indoor unit groups

Easy servicing and commissioning

- › Remote refrigerant containment check preventing on site visit
- › Simplified troubleshooting
- › Save time on commissioning thanks to the pre-commissioning tool
- › Auto registration of indoor units

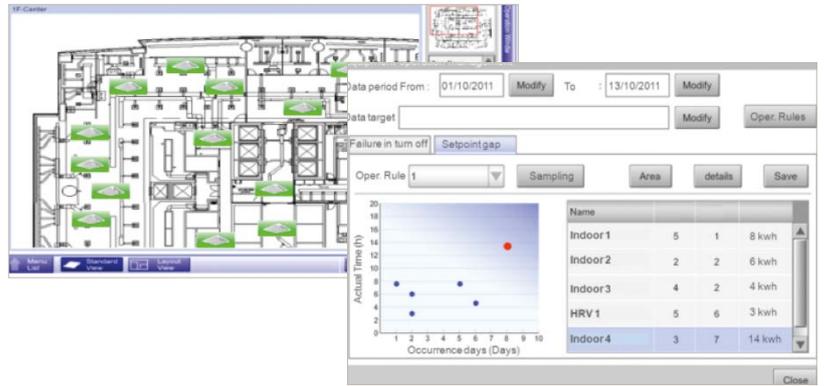

Functions overview



Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

System layout

- › Up to 2,560 unit groups can be controlled (ITM plus Integrator + 7 iPU (incl. iTM adaptor)
- › Ethernet TCP/IP

Management

- › Web access
- › Power Proportional Distribution (option)
- › Operational history (malfunctions, operation hours, ...)
- › Smart energy management
 - monitor if energy use is according to plan
 - detect origins of energy waste
- › Setback function
- › Sliding temperature

Control

- › Individual control (2,560 groups)
- › Schedule setting (Weekly schedule, yearly calendar, seasonal schedule)
- › Interlock control
- › Setpoint limitation
- › Temperature limit

WAGO Interface

- › Modular integration of 3rd party equipment
 - WAGO coupler (interface between WAGO and Modbus)
 - Di module
 - Do module
 - Ai module
 - Thermistor module

Connectable to

- DX Split, Sky Air, VRV
- Chillers (via POL638.70 controller)
- NEW** - Daikin AHU
- Fan coils
- Daikin Altherma Flex type
- LT and HT hydroboxes
- Air curtains
- WAGO I/O
- NEW** - BACnet protocol

Modbus Interface

RTD-W

Modbus interface for monitoring and control of Daikin Altherma Flex Type, VRV HT hydrobox and **small inverter chiller**.




Main functions		RTD-W
Dimensions	H x W x D mm	100x100x22
On/off prohibition		✓
Modbus RS485		✓
Dry contact control		✓
Output signal (operation error)		✓
Space heating / cooling operation		✓
Domestic hot water control		✓
Smart Grid control		
Control functions		
On/Off Space heating/cooling		M,C
Set point leaving water temperature (heating / cooling)		M,V
Room temperature setpoint		M
Operation mode		M
Domestic Hot water ON		
Domestic Hot Water reheat		M,C
Domestic Hot Water reheat setpoint		
Domestic Hot Water storage		M
Domestic Hot Water Booster setpoint		
Quiet mode		M,C
Weather dependent setpoint enable		M
Weather dependent curve shift		M
Fault/pump info relay choice		
Control source prohibition		M
Smart grid mode control		
Prohibit Space heating/cooling		
Prohibit DHW		
Prohibit Electric heaters		
Prohibit All operation		
PV available for storage		
Powerful boost		
Monitoring functions		
On/Off Space heating/cooling		M,C
Set point leaving water temperature (H/C)		M
Room temperature setpoint		M
Operation mode		M
Domestic Hot Water reheat		M
Domestic Hot Water storage		M
Number of units in the group		M
Average leaving water temperature		M
Remocon room temperature		M
Fault		M,C
Fault code		M
Circulation pump operation		M
Flow rate		
Solar pump operation		
Compressor status		M
Desinfection operation		M
Setback operation		M
Defrost/ start up		M
Hot start		
Booster Heater operation		
3-Way valve status		
Pump running hours accumulated		M
Compressor running hours accumulated		
Actual leaving water temperature		M
Actual return water temperature		M
Actual DHW tank temperature (*)		M
Actual refrigerant temperature		
Actual outdoor temperature		M

M : Modbus / R : Resistance / V : Voltage / C: control
 * : only when room is occupied / ** : setpoint limitation / (*) if available
 *** : no fan speed control on the CYV air curtain / **** : run & fault

Modbus interface

Integrate chillers, fan coil units and air handling units in BMS systems via modbus protocol

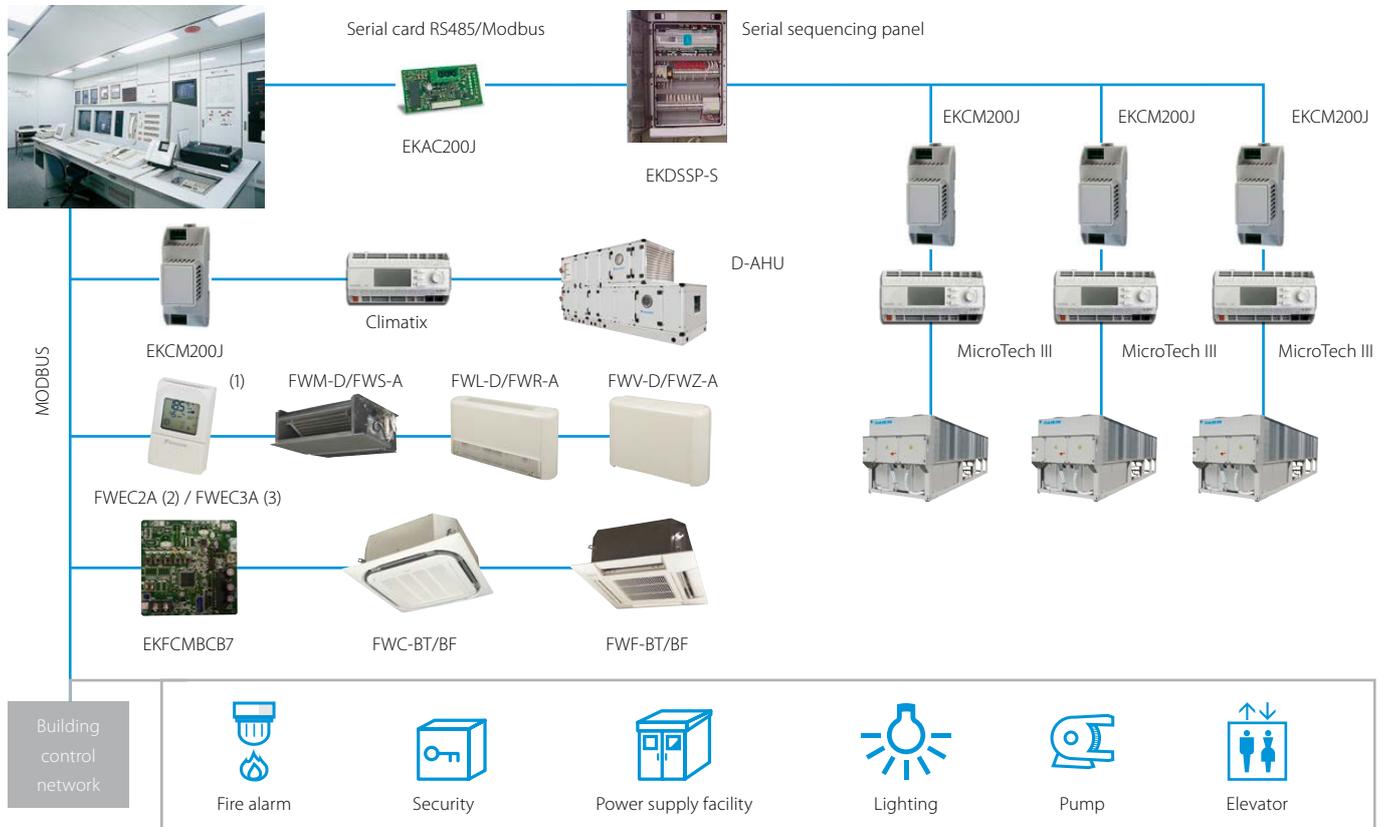



(1) The communication module is integrated in the controller (2) Connection to FWV-D, FWL-D & FWM-D (3) Connection to FWV-D, FWL-D, FWM-D and to FWZ-A, FWR-A, FWS-A

DIII-net Modbus interface

EKMBDXA

Integrated control system for seamless connection between **small inverter chiller**, Sky Air or VRV and BMS systems

- › Communication via Modbus RS485 protocol
- › Easy and fast installation via DIII-net protocol
- › As the Daikin DIII-net protocol is used only one modbus interface is needed per Daikin

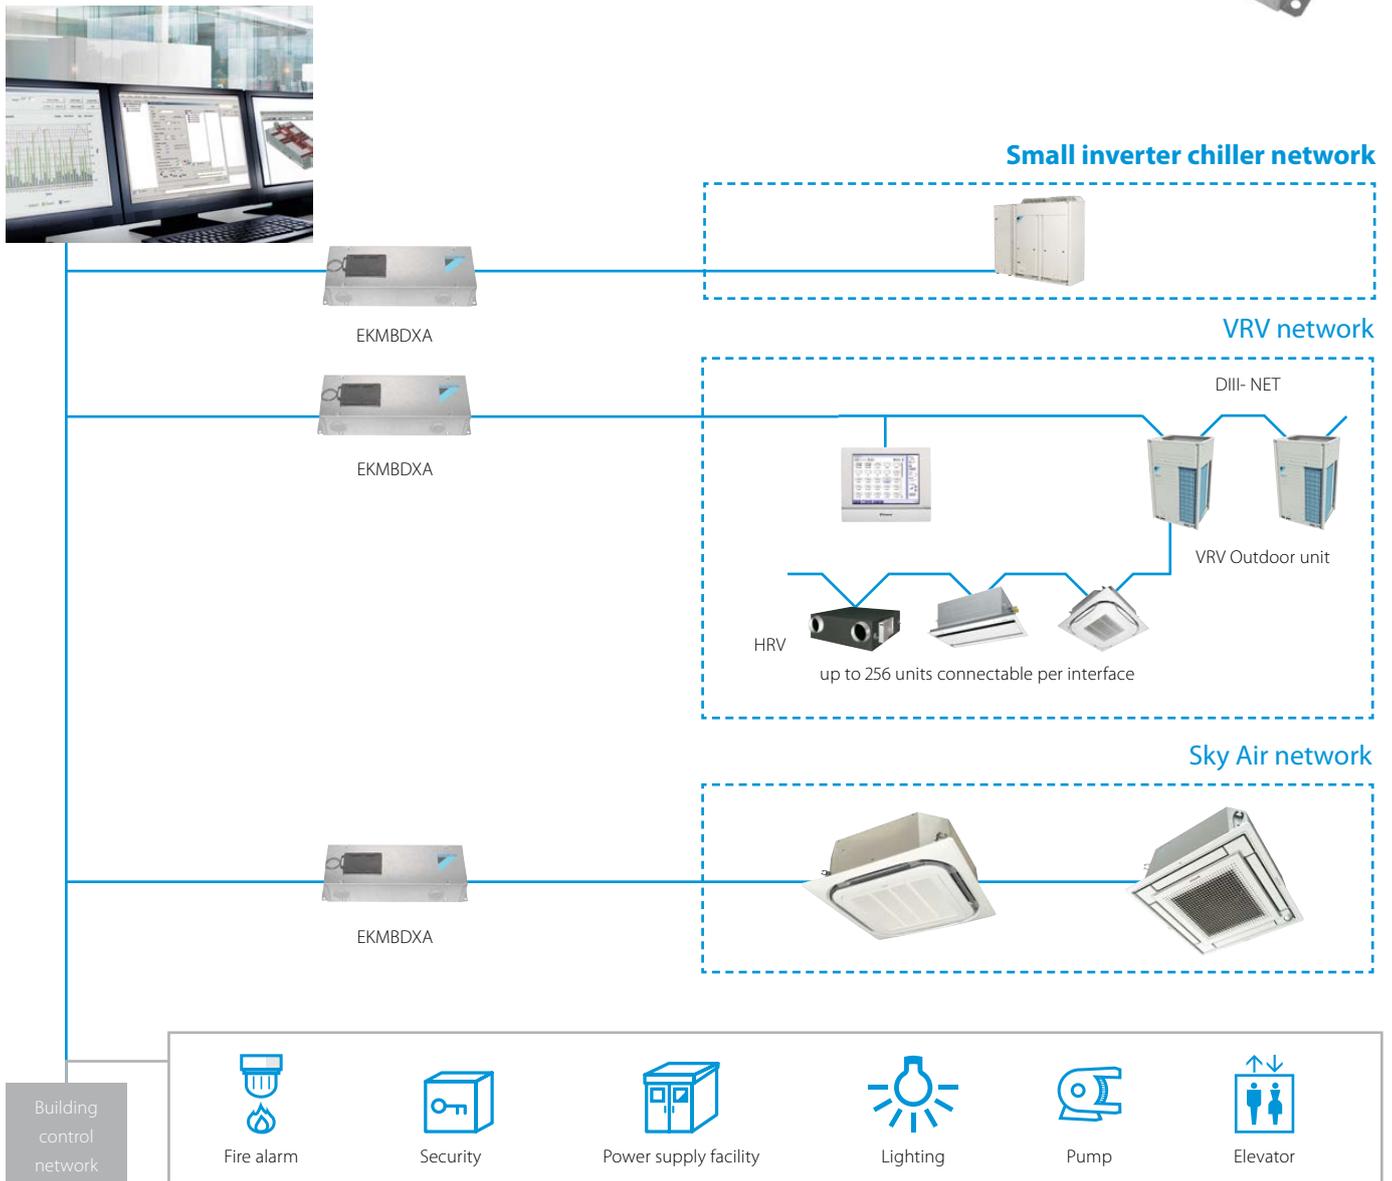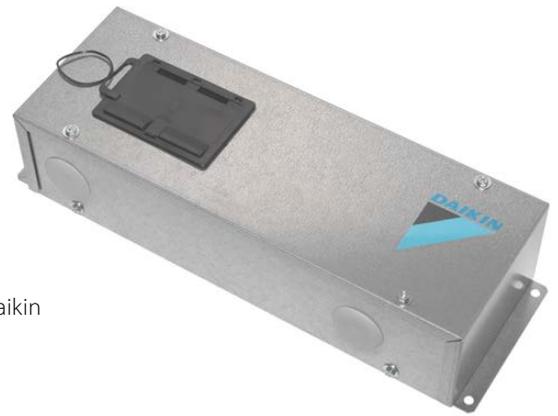


		EKMBDXA7V1	
Maximum number of connectable indoor units		64	
Maximum number of connectable outdoor units		10	
Communication	DIII-NET - Remark	DIII-NET (F1F2)	
	Protocol - Remark	2 wire; communication speed: 9600 bps or 19200 bps	
	Protocol - Type	RS485 (modbus)	
	Protocol - Max. Wiring length	m	500
Dimensions	HeightxWidthxDepth	mm	124x379x87
Weight		kg	2.1
Ambient temperature - operation	Max.	°C	60
	Min.	°C	0
Installation		Indoor installation	
Power supply	Frequency	Hz	50
	Voltage	V	220-240



BACnet Interface

Integrated control system for seamless connection between VRV, applied systems, air handling units and BMS systems


- › Interface for BMS system
- › Communication via BACnet protocol (connection via Ethernet)
- › Unlimited sitesize
- › Easy and fast installation

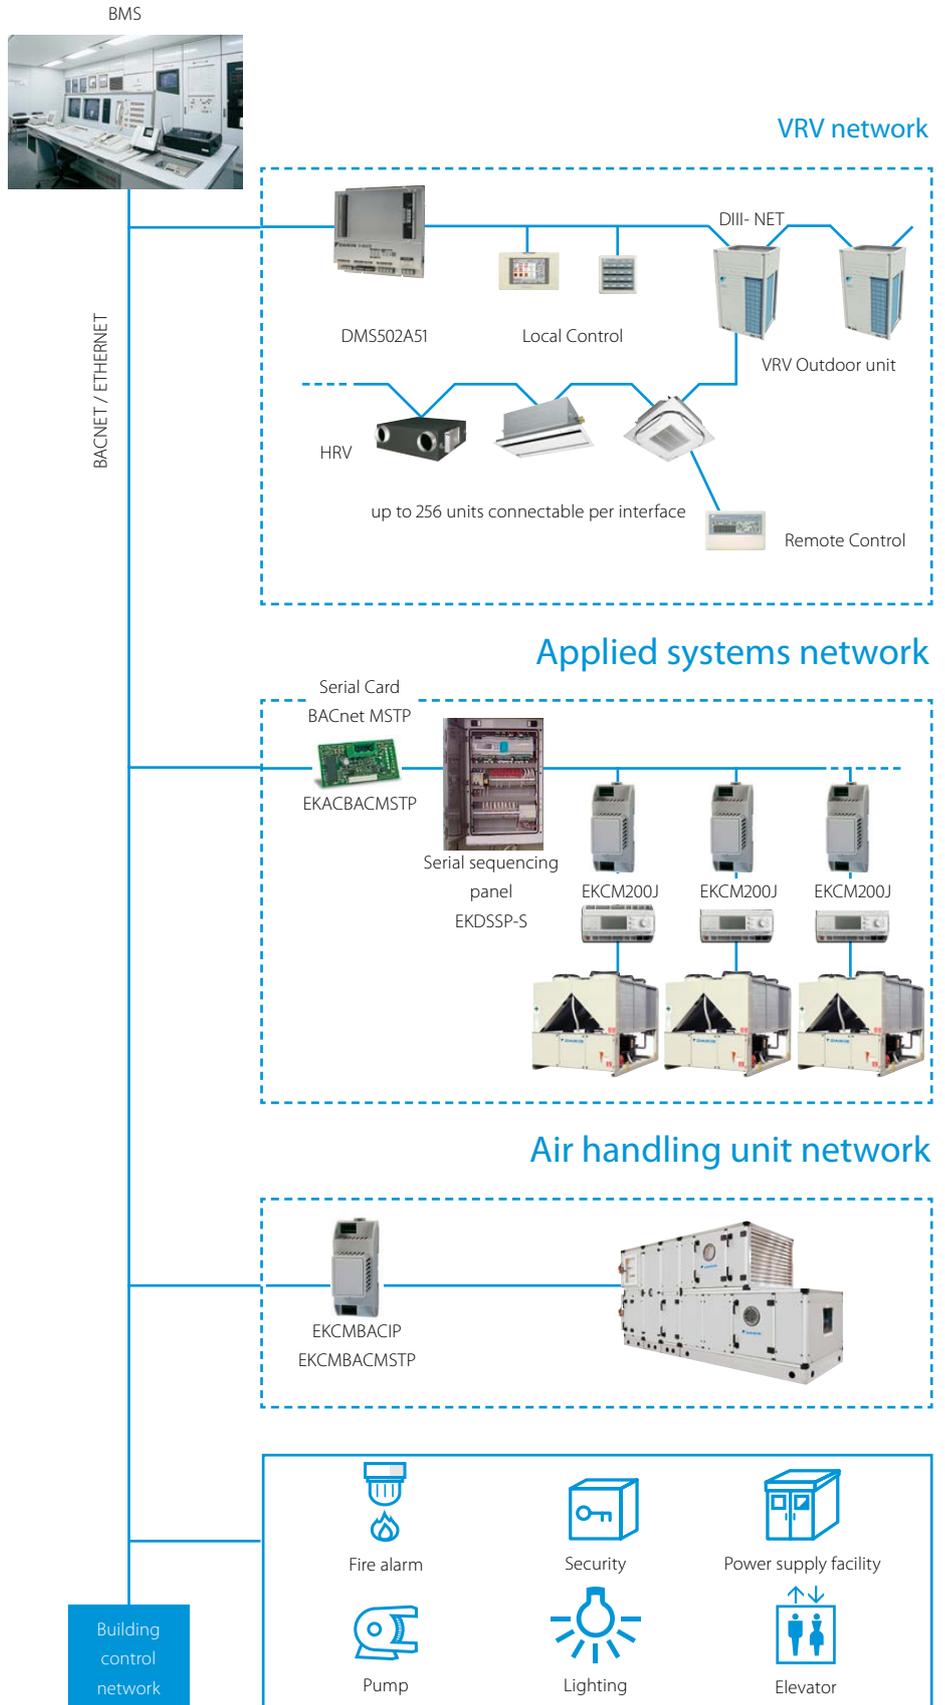

LonWorks Interface

Open network integration of VRV and **applied systems** monitoring and control functions into LonWorks networks

- › Interface for Lon connection to LonWorks networks
- › Communication via Lon protocol (twisted pair wire)
- › Unlimited sitesize
- › Quick and easy installation

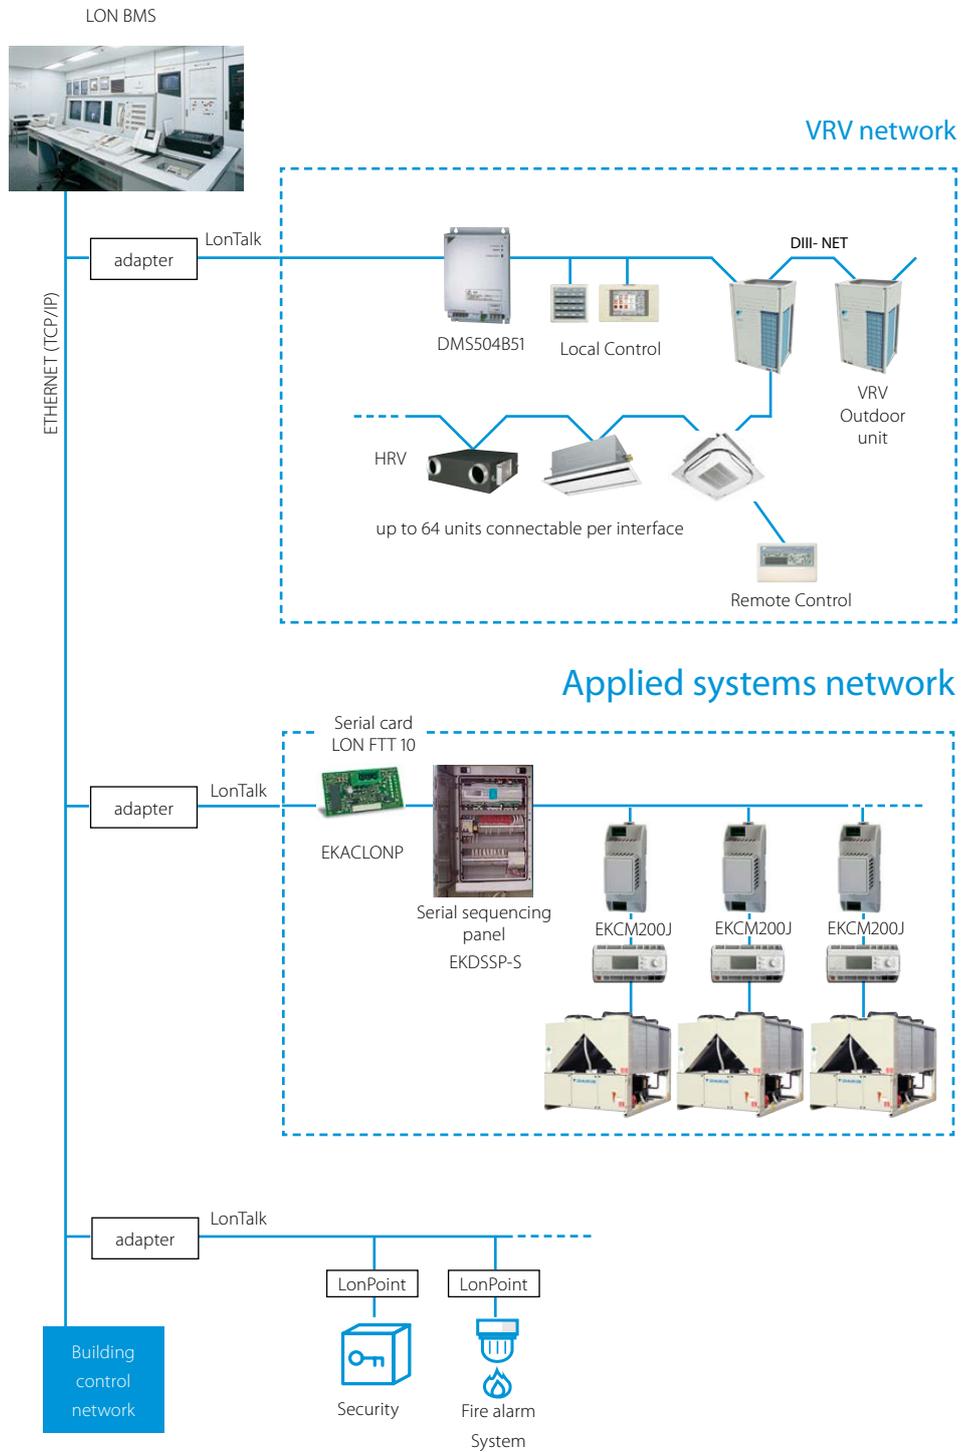



Contents

Options & accessories

Chillers	152
Fan coil units	158

Options - Chillers

Options - Small chillers

Chiller series	Integrated hydronics		LWE			Electrical
	Single pump	High Glycol		Low Glycol		Evaporator heater tape
	OPSP	OPZH		OPZL		OP10
EWAQ-ADVP	STD					STD
EWYQ-ADVP	STD					STD
EWAQ-ACV3	STD					STD
EWAQ-ACW1	STD					STD
EWYQ-ACV3	STD					STD
EWYQ-ACW1	STD					STD
EWWP-KBW1N			OPT		OPT	
EWLP-KBW1N			OPT		OPT	

(s) OP12 & OP03 need to be added to meet Swedish national law 1992: 36 (1) Impossible option combination: OPZH+OPZL STD = Standard , OPT = Option

OPTs - Medium and large chillers (Part 1)

Description	Code	EWAQ-BAW EWYQ-BAW	EWAQ-E-XS EWAQ-F-SS/XS	EWAQ-E- XL/XR EWAQ-F-SL/ SR/XL/XR	EWYQ-F-XS	EWYQ-F-XL	EWYQ-F-XR	EWAD-E-	EWAD-D-SS	EWAD-D-SL	EWAD-D-SR	EWAD-D-SX	EWAD-D-XS	EWAD-D-XR	EWAD-D-HS
Total heat recovery	01							OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Total heat recovery (1 circuit)	02								OPT						
Partial heat recovery	03		OPT	OPT	CF	CF	CF	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Direct on line starter (DOL)	04		STD	STD	STD	STD	STD								
Wye-Delta compressor starter (Y-D)	05							STD	STD	STD	STD	STD	STD	STD	STD
Soft starter	06		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Heat pump version	07														
Heat pump version (including pursuit mode)	07a														
Brine version (down -8°C)	08a (1)														
Brine version (down -10°C)	08b (1)	REC													
Brine version (down -15°C)	08c (1)		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Double setpoint	10		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Compressor thermal overload relays	11		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Fans thermal relays	12														
Phase monitor	13		REC	REC	REC	REC	REC	STD	STD	STD	STD	STD	STD	STD	STD
Inverter compressor starter	14								OPT(4)						
Under / Over voltage control	15		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Energy meter	16		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Energy meter (including current limit)	16a														
Capacitors for power factor correction	17		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Auxiliary relay	18														
Current limit	19							OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Evaporator victaulic kit	20		STD	STD	STD	STD	STD		STD			STD	STD	STD	
Evaporator flange kit	21								OPT			OPT	OPT	OPT	
Evaporator marine waterbox victaulic (2 passes)	22														
Evaporator marine waterbox victaulic (1 pass)	22a														
Evaporator marine waterbox victaulic (3 passes)	23														
Evaporator marine waterbox flanged (2 passes)	24														
Evaporator marine waterbox flanged (1 pass)	24a														
Evaporator marine waterbox flanged (3 passes)	25														
Condenser double flanges kit	26														
Evaporator water side design pressure (10 Bar)	27								STD						
Evaporator water side design pressure (16 Bar)	28														
20mm evaporator insulation	29		STD	STD	STD	STD	STD	OPT	OPT	STD	STD	OPT	OPT	OPT	STD
Axial fans (100 Pa ESP)	30														
McQuiet	31														
Axial fans (250 Pa ESP)	32		CF						CF						
20mm condenser insulation	33														
Fan silent mode	34														
Fans Speed Control Device (Phase Cut)	35														
Condenser victaulic kit	36														
Condenser flange kit	37														
Condenser marine waterbox victaulic (2 passes)	38														
Condenser marine waterbox victaulic (1 pass)	38a														
Condenser marine waterbox victaulic (3 passes)	39														
Condenser marine waterbox flanged (2 passes)	40														
Condenser marine waterbox flanged (1 pass)	40a														
Condenser marine waterbox flanged (3 passes)	41														
Speedtrol (fan speed control device - ON/OFF - up to -18°C)	42		REC	REC				REC	REC	REC	REC		REC	REC	REC
Speedtrol (fan speed control device - ON/OFF - down to -10°C in cooling)	42a				OPT	OPT									
Condenser coil guards	43		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Evaporator area guards	44		OPT	OPT	OPT	OPT	OPT								
Cu-Cu condenser coil	45		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Cu-Cu-Sn condenser coil	46		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT

STD = Standard
 REC = Recommended
 OPT = Option
 CF = Contact factory

EWAD-C-	EWAD-CZ	EWAD-TZ	EWAQ-GZ	EWAD-CF	EWYD-BZSS	EWYD-BZSL	ERAD-E-	EWVQ-B-	EWWD-J-SS	EWWD-G-	EWWD-I-SS	EWWD-I-XS	EWWD-H-XS	EWLD-J-SS	EWLD-G-SS	EWLD-I-SS	EWWD-FZXS
OPT	OPT	OPT					OPT			OPT	OPT						
OPT	OPT	OPT			OPT	OPT	OPT	OPT		OPT	OPT	OPT			OPT		
STD				STD			STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
OPT				OPT			OPT	OPT	OPT(4)	OPT	OPT	OPT	OPT	OPT(4)	OPT	OPT	OPT
OPT	OPT	OPT		OPT	OPT	OPT		OPT	OPT	OPT	OPT	OPT	NC-SO	OPT	OPT	OPT	
			REC														
STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD		STD	STD	
OPT	STD	STD		OPT			OPT	OPT	OPT	OPT	OPT	OPT	OPT		OPT	OPT	
STD	STD	STD	REC	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
OPT	STD	STD			STD	STD											STD
OPT	OPT	STD	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
OPT		OPT		OPT			OPT	OPT	OPT	OPT	OPT	OPT	OPT		OPT	OPT	
OPT	OPT			OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	STD
STD	STD	STD	STD		STD	STD		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
OPT	OPT	OPT		STD													CF
													OPT				
													OPT				
													OPT				
								OPT	OPT	OPT	OPT	OPT	OPT				OPT
								STD		STD	STD	STD	STD		STD	STD	STD
STD	STD	STD	STD	STD	OPT	OPT		OPT	STD	OPT	OPT	OPT	STD	STD	OPT	OPT	STD
										OPT	OPT	OPT	OPT				OPT
										OPT	STD	OPT	OPT				STD
																	CF
													OPT				
													OPT				
REC	REC	REC	REC				REC										
OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT										
OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT										
OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT										
OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT										

Options - Medium and large chillers (Part 2)

Description	Code	EWAQ~BAW EWYQ~BAW	EWAQ-E-XS EWAQ-F-SS/XS	EWAQ-E-XL/XR EWAQ-F-SL/ XR/XL/XR	EWYQ-F-XS	EWYQ-F-XL	EWYQ-F-XR	EWAD-E-	EWAD-D-SS	EWAD-D-SL	EWAD-D-SR	EWAD-D-SX	EWAD-D-XS	EWAD-D-XR
Condenser water side design pressure (16 Bar)	47													
Condenser water side design pressure (10 Bar)	47a													
Alucoat fins coil	49		REC	REC	STD	STD	STD	REC	REC	REC	REC	REC	REC	REC
Cu-Ni 90-10 condenser tubes	50													
Condenser 1 pass (ΔT 4-8 °C)	51													
Condenser 2 passes (ΔT 4-8 °C)	52													
Condenser 2 passes (ΔT 9-15 °C)	53													
Condenser 4 passes	54													
Water pressure differential switch on condenser	55													
Water pressure differential switch on evaporator	56									STD	STD			
Evaporator electric heater	57	REC	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Evaporator flow switch	58		STD	STD	STD	STD	STD	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Condenser flow switch	59													
Electronic expansion valve	60		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Discharge line shut-off valve	61		OPT	OPT	OPT	OPT	OPT	STD	STD	STD	STD	STD	STD	STD
Suction line shut-off valve	62		OPT	OPT	OPT	OPT	OPT	STD	STD	STD	STD	STD	STD	STD
High pressure side manometers	63		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Low pressure side manometers	64		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Ambient outside temperature sensor and setpoint reset	67		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Hour run meter	68		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
General fault contactor	69		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Container Kit	71		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Rubber anti vibration mounts	75		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Sound proof system	76													
Sound proof system (integral)	76-a													
Sound proof system (compressor)	76-b													
Spring anti vibration mounts	77		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
One centrifugal pump (low head)	78	OPT						OPT						
One centrifugal pump --- SPK1	78-a		OPT	OPT	OPT	OPT	OPT			OPT	OPT			
One centrifugal pump --- SPK2	78-b		OPT	OPT	OPT	OPT	OPT			OPT	OPT			
One centrifugal pump --- SPK3	78-c		OPT	OPT	OPT	OPT	OPT			OPT	OPT			
One centrifugal pump --- SPK4	78-d		OPT	OPT	OPT	OPT	OPT			OPT	OPT			
One centrifugal pump --- SPK5	78-e								OPT				OPT	OPT
One centrifugal pump --- SPK6	78-f								OPT				OPT	OPT
One centrifugal pump --- SPK7	78-g								OPT				OPT	OPT
One centrifugal pump --- SPK8	78-h								OPT				OPT	OPT
One centrifugal pump --- SPK9	78-i												OPT	
One centrifugal pump --- SPK10	78-j												OPT	
One centrifugal pump --- SPK1a	78-l				OPT	OPT	OPT							
One centrifugal pump --- SPK1b	78-m				OPT	OPT	OPT							
One centrifugal pump --- SPK1c	78-n				OPT	OPT	OPT							
One centrifugal pump (high head)	79	OPT						OPT						
Two centrifugal pump (low head)	80													
Two centrifugal pump --- DPK1	80-a									OPT	OPT			
Two centrifugal pump --- DPK2	80-b									OPT	OPT			
Two centrifugal pump --- DPK3	80-c									OPT	OPT			
Two centrifugal pump --- DPK4	80-d									OPT	OPT			
Two centrifugal pump --- DPK5	80-e								OPT				OPT	OPT
Two centrifugal pump --- DPK6	80-f								OPT				OPT	OPT
Two centrifugal pump --- DPK7	80-g								OPT				OPT	OPT
Two centrifugal pump --- DPK8	80-h								OPT				OPT	OPT
Two centrifugal pump (high head)	81													
Witness test	82													
External tank without cabinet (500 L)	83 (3)		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
External tank without cabinet (1000 L)	84 (3)		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
External Tank (500 L) With CABINET RAL 7042	85													
External Tank (1000 L) With CABINET RAL 7042	86													
External tank with cabinet (500 L)	87 (3)		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
External tank with cabinet (1000 L)	88 (3)		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Acoustic test	89													
Setpoint reset, Demand limit and Alarm from external device	90		OPT	OPT	OPT	OPT	OPT	STD	STD	STD	STD	STD	STD	STD
Double pressure relief valve with diverter	91		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
PW COMPRESSOR - PART WINDING START	92													
Low ambient kit for 1 circuit	93													
Low ambient kit for 2 circuits	94													
Compressors circuit breakers	95		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Fans circuit breakers	96		OPT	OPT	OPT	OPT	OPT	STD	STD	STD	STD	STD	STD	STD
Main switch interlock door	97		STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Emergency stop	98													
Fans speed regulation (+ fan silent mode)	99 (2)		OPT	OPT				OPT	OPT	OPT	OPT	STD	OPT	OPT
Fans speed regulation (inverter)	99a (2)				OPT	OPT	STD							
Refrigerant recovery unit	100													
Evaporator right water connections	101								SO	SO	SO	SO	SO	SO
Ground fault relay	102		OPT	OPT	OPT	OPT	OPT							
Evaporator 1 pass	103													
Evaporator 2 passes	103a													
Evaporator double flange kit	104													
Liquid receiver	105													
Evaporator right water connections	106													
Rapid restart	110													
High temperature kit	111													
Transport kit	112		OPT	OPT	OPT	OPT		OPT	OPT	OPT	OPT	OPT	OPT	OPT
Optimized free cooling (VFD fans regulation)	113-a													
Optimized free cooling (On/Off fans)	113-b													
Nordic kit	114				OPT	OPT	OPT							
Water filter	115		STD	STD	STD	STD	STD							
Condenser coil protection panels	116		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Blygold coil treatment	117		OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT	OPT
Inverter kit for pump (SPK1-SPK6)	120a													
Inverter kit for pump (SPK7-SPK10)	120b													
Inverter kit for pumps (DPK2-DPK6)	120c													
Inverter kit for pumps (DPK7-DPK10)	120d													
Refrigerant leak detection	121													

(1) Option 08 includes option 29 - (2) Option 99(a) includes 'Fan overload protection' - (3) Piping between the inertial tank and the unit is not included. Electric heater power supply has to be provided from external source - (4) The order of inverter compressor will have an impact on the delivery time: please contact the factory - (5) Unit performance will be affected; contact factory for information. It is mandatory to order the option 26 when selecting CU-Ni 90-10 condenser tubes - (6) Sound proof system - compressor enclosure - (7) Compressor enclosure - (8) Soundproof cabinet will be supplied in a separate kit and not assembled. For better performance the cabinet will be integral kind (around the whole chiller, not only around compressors).

Accessories - Chillers

Panels	Air-cooled chillers							
	EWA/YQ~ADVP/ACV3/ACW1	EWA/YQ-BA SEHVX+SERHQ	EWAQ-E-EWA/YQ-F	EWYD~BZ	EWAQ~GZ	EWAD~E-ERAD~E	EWAD~D-	EWAD~
EKDSSP*** (a) Serial Sequencing Panel				•				
EKDSSP-S*** Serial Sequencing Panel (Siemens)			•		•	•	•	•
EKDDSP Digital Sequencing Panel			•	•	•	•	•	•
EKPWPRO PlantWatchPRO monitoring system				•				
EKPWPROM PlantWatchPRO monitoring system (modem & webserver included)				•				

Serial Cards & Communication Modules	Air-cooled chillers							
	EWA/YQ~ADVP/ACV3/ACW1	EWAQ~BA EWYQ~BA	EWAQ-E-EWA/YQ-F	EWYD~BZ	EWAQ~GZ	EWAD~E-ERAD~E	EWAD~D-	EWAD~
EKAC200J Serial Card RS485/Modbus				•				
EKACBAC Ethernet Card BACnet				•				
EKACLONP Serial Card LON FTT 10				•				
EKACRS232 Serial Card RS232 Modem Interface (single unit only)				•				
EKACWEB Web Server Card				•				
EKACBACMSTP Serial Card BACnet MSTP				•				
EKACBACCERT Serial Card BACnet pre-loaded (centrifugal chillers)								
EKCM200J ModBus RTU communication module			•		•	•	•	•
EKMBDXA7V1 ModBus Interface DIII		•						
EKCMLON LON communication module			•		•	•	•	•
EKCMBACMSTP BACnet/MSTP communication module			•		•	•	•	•
EKCMBACIP BACnet/IP communication module			•		•	•	•	•

Other Systems & Accessories	Air-cooled chillers							
	EWA/YQ~ADVP/ACV3/ACW1	EWAQ~BA EWYQ~BA	EWAQ-E-EWA/YQ-F	EWYD~BZ	EWAQ~GZ	EWAD~E-ERAD~E	EWAD~D-	EWAD~
EKCON Converter RS485 to RS232				•				
EKCONUSB Converter RS485 to USB				•				
EKMODEM Fixed modem				•				
EKGSMOD GSM modem				•				
EKRUPCJ Remote display kit				•				
EKRUPCS Local/remote display HMI			•		•	•	•	•
EKPWPROEXT PlantWatchPro I/O extension module for hardwiring and retrofit				•				
EKGWWEB Gateway web (Ethernet LAN SNMP)				•				
EKAC10C (c) Address card for connection to BMS or Remote user interface								
EKRUMCA (b) Remote installed user interface								
EHMC* Hydraulic module								
EKLS1 Low noise kit - 014 version								
EKLS2 Low noise kit - 022-195 version								
ECB2MUAW Controller kit (for modular units)								
ECB3MUAW Controller kit (for modular units)								
EKRPIAHT Digital input/output PCB		•						
EKRUAHTB Remote user interface		•						
DTA104A62 External control adapter		•						
BHGP26A1 Digital pressure gauge kit		•						
RTD-W BMS integration		•						
EKCC8-W Universal centralised controller		•						

Notes:
 (a) Serial Sequencing Panel working in cooling mode only with EWYD~BZ and EWYQ~F-ranges
 (b) To install EKRUMCA -> EKAC10C needs to be installed
 (c) EKAC10C allows direct connection to MODBUS BMS system

				Water-cooled chillers						
-C-	EWAD~CZ	EWAD~CF	EWAD~TZ	EWWP~KB EWLP~KB	EW_Q-G EW_Q-L	EWWD~G- EWLD~G-	EWWD~I- EWLD~I-	EWWD~J- EWLD~J-	EWQ~B-	EWWD~H-
	•	•	•		•	•	•	•	•	•
	•	•	•		•	•	•	•	•	•

				Water-cooled chillers						
-C-	EWAD~CZ	EWAD~CF	EWAD~TZ	EWWP~KB EWLP~KB	EW_Q-G EW_Q-L	EWWD~G- EWLD~G-	EWWD~I- EWLD~I-	EWWD~J- EWLD~J-	EWQ~B-	EWWD~H-
	•	•	•		•	•	•	•	•	•
	•	•	•		•	•	•	•	•	•
	•	•	•		•	•	•	•	•	•
	•	•	•		•	•	•	•	•	•

				Water-cooled chillers						
-C-	EWAD~CZ	EWAD~CF	EWAD~TZ	EWWP~KB EWLP~KB	EW_Q-G EW_Q-L	EWWD~G- EWLD~G-	EWWD~I- EWLD~I-	EWWD~J- EWLD~J-	EWQ~B-	EWWD~H-
	•	•	•		•	•	•	•	•	•
				•						
				•						
				•						
				•						
				•						
				•						

Accessories - Fan coil units

		FWM~D / FWL~D / FWV~D										FWS~A / FWR~A / FWZ~A			
Network & control systems		1	15	2	25	3	35	4	6	8	10	2	3	6	8
Wired remote controller	(Standard)	FWEC1A										-			
Wired remote controller	(Advanced)	FWEC2A										-			
Wired remote controller	(Advanced Plus)	FWEC3A										FWEC3A			
Split controller - power control board		FWECSAP										FWECSAP			
Split controller - control panel		FWECSAC										FWECSAC			
Controller electromechanical		ECFWMB6										-			
On board mounting kit		FWECKA										FWECKA			
Wall mounting kit		FWFCKA										FWFCKA			
Wired remote controller	(Cooling only)	-										-			
Wired remote controller	(Heat pump)	-										-			
Wireless controller	(Cooling only)	-										-			
Wireless controller	(Heat pump)	-										-			
Temperature sensor kit		FWTSKA										FWTSKA			
Relative humidity sensor kit		FWHska										FWHska			
Fan stop thermostat		YFSTA6										-			
Master slave interface		EPMSA6										-			
Power interface		-										-			
Optional PCB for MOD-bus connection		-										-			

		FWM~D / FWL~D / FWV~D										FWS~A / FWR~A / FWZ~A					
Valves		1	15	2	25	3	35	4	6	8	10	2	3	6	8		
3-ways 230V on/off valve kit	(2-pipe)	E2MV03A6				E2MV06A6		E2MV10A6		E2MV03A6		E2MV10A6		-		-	
3-ways 230V on/off valve kit	(4-pipe)	E4MV03A6				E4MV06A6		E4MV10A6		E4MV03A6		E4MV10A6		-		-	
2-ways 230V on/off valve kit (cooling heat exchanger)		E2MV2B07A6				E2MV2B10A6		E2MV2B10A6		E2MV2B07A6		E2MV2B10A6		-		-	
2-ways 230V on/off valve kit (additional heat exchanger)		E2MV2B07A6										E2MV2B07A6					
Simplified 3-ways 230V on/off valve kit	(2-pipe)	E2MVD03A6				E2MVD06A6		E2MVD10A6		E2MVD03A6		E2MVD06A6		E2MVD10A6		-	
Simplified 3-ways 230V on/off valve kit	(4-pipe)	E4MVD03A6				E4MVD06A6		E4MVD10A6		E4MVD03A6		E4MVD06A6		E4MVD10A6		-	
3-ways 24V on/off valve kit	(2-pipe)	E2M2V03A6				E2M2V06A6		E2M2V10A6		E2M2V03A6		E2M2V06A6		E2M2V10A6		-	
3-ways 24V on/off valve kit	(4-pipe)	E4M2V03A6				E4M2V06A6		E4M2V10A6		E4M2V03A6		E4M2V06A6		E4M2V10A6		-	
3-ways proportional valve kit	(2-pipe)	E2MPV03A6				E2MPV06A6		E2MPV10A6		-		-		-		-	
3-ways proportional valve kit	(4-pipe)	E4MPV03A6				E4MPV06A6		E4MPV10A6		-		-		-		-	
2-ways 24V on/off valve kit (cooling heat exchanger)		E2M2V207A6				E2M2V210A6		E2M2V210A6		E2M2V207A6		E2M2V210A6		-		-	
2-ways 24V on/off valve kit (additional heat exchanger)		E2M2V207A6										E2M2V207A6					
2-ways proportional valve kit (cooling heat exchanger)		E2MPV207A6				E2MPV210A6		E2MPV210A6		-		-		-		-	
2-ways proportional valve kit (additional heat exchanger)		E2MPV207A6										-					
3-ways 230V on/off valve kit (additional heat exchanger)		-										-					
2-ways 230V on/off valve kit	(2-pipe)	-										-					
2-ways 230V on/off valve kit	(4-pipe)	-										-					

		FWM~D / FWL~D / FWV~D										FWS~A / FWR~A / FWZ~A			
Panels		1	15	2	25	3	35	4	6	8	10	2	3	6	8
Decoration panel 600x600	(2-pipe)	-										-			
Decoration panel 900x900	(2-pipe)	-										-			
Decoration panel 900x900	(4-pipe)	-										-			

In case of FWF-C and FWG-A ranges, decoration panel code includes also wireless controller

FWD~A							FWB~B			FWP~A		FWT~C	FWC~B	FWF~B
4	6	8	10	12	16	18	2-4	5-7	8-10	2-4	5-7	All sizes	All sizes	All sizes
			FWEC1A					FWEC1A		-		MERCA	BRC315D	BRC315D
			FWEC2A					FWEC2A		-		-	-	-
			FWEC3A					FWEC3A		FWEC3A		-	-	-
			FWECSAP					FWECSAP		FWECSAP		-	-	-
			FWECSAC					FWECSAC		FWECSAC		-	-	-
			-					-		-		-	-	-
			-					-		-		-	-	-
			FWFCKA					FWFCKA		FWFCKA		-	-	-
			-					-		-		-	-	-
			-					-		-		SRC-HPA	-	-
			-					-		-		-	-	-
			-					-		-		WRC-HPC	BRC7F532F	BRC7F530
			FWTSKA					FWTSKA		FWTSKA		-	-	-
			FWHSKA					FWHSKA		FWHSKA		-	-	-
			YFSTA6					YFSTA6		-		-	-	-
			EPIMSA6					EPIMSA6		-		-	-	-
			-		EPIB6			-		-		-	-	-
			-					-		-		-	EKFCMBCB	EKFCMBCB

FWD~A							FWB~B			FWP~A		FWT~C	FWC~B	FWF~B
4	6	8	10	12	16	18	2-4	5-7	8-10	2-4	5-7	All sizes	All sizes	All sizes
ED2MV04A6		ED2MV10A6		ED2MV12A6		ED2MV18A6		-				-	EKMV3C09B	EKMV3C09B
ED4MV04A6		ED4MV10A6		2x ED2MV12A6		2 x ED2MV18A6		-				-	2 x EKMV3C09B	2 x EKMV3C09B
							E2MV207A6		E2MV210A6			-	-	-
							E2MV207A6		E2MV210A6		E2MV207A6	-	-	-
												-	-	-
												-	-	-
												-	-	-
												-	-	-
												-	-	-
												-	-	-
												-	-	-
												-	-	-
												-	-	-
							E2MV307A6		E2MV310A6		E2MV307A6	-	-	-
												-	EKMV2C09B	EKMV2C09B
												-	2 x EKMV2C09B	2 x EKMV2C09B

FWD~A							FWB~B			FWP~A		FWT~C	FWC~B	FWF~B
4	6	8	10	12	16	18	2-4	5-7	8-10	2-4	5-7	All sizes	All sizes	All sizes
												-	-	BYFQ60B
												-	BYCQ140C	-
												-	BYCQ140C	-

Accessories - Fan coil units and air handling units

Other accessories	FWM~D / FWL~D / FWV~D										FWS~A / FWR~A / FWZ~A			
	1	15	2	25	3	35	4	6	8	10	2	3	6	8
Electric heater (Standard)	EEH01A6	EEH02A6		EEH03A6		EEH06A6			EEH10A6		EEH02A6	EEH03A6	EEH06A6	EEH10A6
Electric heater (Big)	-										-			
Fresh air intake	EFA02A6		EFA03A6		EFA06A6		EFA10A6			EFA02A6	EFA03A6	EFA06A6	EFA10A6	
Additional heat exchanger	ESRH02A6		ESRH03A6		ESRH06A6		ESRH10A6			ESRH02A6	ESRH03A6	ESRH06A6	ESRH10A6	
Air intake & discharge grille	EAIDF02A6		EAIDF03A6		EAIDF06A6		EAIDF10A6			EAIDF02A6	EAIDF03A6	EAIDF06A6	EAIDF10A6	
Rear panel	ERPVO2A6		ERPVO3A6		ERPVO6A6		ERPVO10A6			ERPVO2A6	ERPVO3A6	ERPVO6A6	ERPVO10A6	
Supporting feet	ESFV06A6						ESFV10A6			ESFV06A6			ESFV10A6	
Supporting feet & grille	ESFVG02A6		ESFVG03A6		ESFVG06A6		ESFVG10A6			ESFVG02A6	ESFVG03A6	ESFVG06A6	ESFVG10A6	
Plenum box with circular connections	EPCC02A6 (only for FWM-D)		EPCC03A6 (only for FWM-D)		EPCC06A6 (only for FWM-D)		EPCC10A6 (only for FWM-D)			EPCC02A6 (only for FWS-A)	EPCC03A6 (only for FWS-A)	EPCC06A6 (only for FWS-A)	EPCC10A6 (only for FWS-A)	
Vertical auxiliary drainpan	EDPVB6						EDPVB6							
Horizontal auxiliary drainpan	EDPHB6						EDPHB6							

Mechanical options	FWC~BT/BF	FWF~BT/BF
Sealing member of air discharge outlet	KDBHQ55C140	KDBH44BA60
Long-life filter	KAFP551K160	KAFQ441BA60
Fresh air intake kit (20% fresh air) (Direct installation)	KDDQ55C140	-
Fresh air intake kit (Direct installation)	-	KDDQ44XA60
Panel spacer	KDBQ44B60	-

Control options	FWF~BT/BF	FWC~BT/BF
Remote sensor	KRCS01-1	KRCS01-4
Remote ON / OFF	EKROROA	-
Installation box for adaptor PCB	KRP1BA101	KRP1H98

Control options	FWF~BT/BF - FWC~BT/BF
Central remote control	DCS302CA51
Intelligent touch controller	DCS601C51C
Unified ON/OFF controller	DCS301BA51
Electrical installation box with earth terminal (2 blocks)	KJB212A
Electrical installation box with earth terminal (3 blocks)	KJB311A
Electrical installation box	KJB411A
Schedule timer	DST301BA51
Wiring adapter for electrical appendices	KRP4AA53
Wiring adapter for electrical appendices	KRP2A52

Accessories - Fan coil units and air handling units

FWD~A						FWB~B			FWP~A		FWT~C	FWC~B	FWF~B	
4	6	8	10	12	16	18	2-4	5-7	8-10	2-4	5-7	All sizes	All sizes	All sizes
EDEH04A6	EDEHS06A6	EDEHS10A6		EDEHS12A6	EDEHS18A6		Factory mounted			Factory mounted		-	-	-
EDEH04A6	EDEHB06A6	EDEHB10A6		EDEHB12A6	EDEHB18A6		-			-		-	-	-
EDMFA04A6	EDMFA06A6	EDMFA10A6		EDMFA12A6	EDMFA18A6		-			-		-	-	-
-							EAH04A6	EAH07A6	EAH10A6	EAH04A6	EAH07A6	-	-	-
-							-			-		-	-	-
-							-			-		-	-	-
-							-			-		-	-	-
-							-			-		-	-	-
-							-			-		-	-	-
EDDPV10A6				EDDPV18A6			-			-		-	-	-
EDDPH10A6				EDDPH18A6			-			-		-	-	-

Power supply

T1	=	3~, 220V, 50Hz
V1	=	1~, 220-240V, 50Hz
VE	=	1~, 220-240V/220V, 50Hz/60Hz*
V3	=	1~, 230V, 50Hz
VM	=	1~, 220~240V/220~230V, 50Hz/60Hz
W1	=	3N~, 400V, 50Hz
Y1	=	3~, 400V, 50Hz

* For VE power supply only 1~, 220-240V, 50Hz data is displayed in this catalogue.

Conversion table refrigerant piping

inch	mm
1/4"	6.4 mm
3/8"	9.5 mm
1/2"	12.7 mm
5/8"	15.9 mm
3/4"	19.1 mm
7/8"	22.2 mm
1 1/8"	28.5 mm
1 3/8"	34.9 mm
1 5/8"	41.3 mm
1 3/4"	44.5 mm
2"	50.8 mm
2 1/8"	54 mm
2 5/8"	66.7 mm

F-gas regulation

For fully/partially charged equipment: contains fluorinated greenhouse gases. Actual refrigerant charge depends on the final unit construction, details can be found on the unit labels.

For non pre-charged equipment (Chillers: split chiller (SEHVX/SERHQ), condensing units and condenserless chillers): Its functioning relies on fluorinated greenhouse gases.

Measuring conditions

Air cooled chiller	Cooling only	Evaporator: 12°C/7°C	Ambient: 35°CDB
	Heat pump	Evaporator: 12°C/7°C Condenser: 40°C/45°C	Ambient: 35°C Ambient: 7°CDB/6°CWB
Water cooled chiller	Cooling only	Evaporator: 12°C/7°C Condenser: 30°C/35°C	
	Heating only	Evaporator: 12°C/7°C Condenser: 40°C/45°C	
Condenserless chiller		Evaporator: 12°C/7°C Condensing temperature: 45°C / liquid temperature: 40°C	
Fan coil units	Cooling	Room temperature: 27°CDB /19°CWB Water inlet/outlet temperature: 7°C/12°C	
	Heating	Room temperature: 20°C 2 pipe: Water inlet temperature: 50°C (same water flow as in cooling mode) 4 pipe: Water inlet/outlet temperature: 70°C/60°C	

All performance data in this catalogue is in compliance with the Eurovent EN14511 standard.

Energy efficiency Ratio (EER)

Describes the efficiency of a heat pump machine in cooling mode. The rated capacity is divided by the rated total power input.

European Seasonal Energy Efficiency Ratio (ESEER)

An efficiency metric of heat pumps which describes performance of the unit over a typical season where the source temperature varies.

Coefficient of Performance (COP)

Ratio of the heating capacity to the power input of the unit.

Seasonal Coefficient of Performance (SCOP)

SCOP describes the heat pump's average annual efficiency performance. SCOP is therefore an expression for how efficient a specific heat pump will be for a given heating demand profile.

The sound pressure level is measured via a microphone at a certain distance (generally at 1m) from the unit. It is a relative value, depending on the distance and acoustic environment (for measuring conditions: please refer to the technical databooks).

The sound power level is an absolute value indicating the "power" which a sound source generates.

For more detailed information please consult our technical databooks.




EWAD-TZ

Unique inverter and compressor technology



The inverter chiller features a screw compressor with in-built inverter and variable volume ratio.

These new technologies result in a high seasonal efficiency and a rapid payback combined with an extensive option list and a compact design.



ECPEN16-400UK CD · 03/16



Daikin Europe NV, participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin UK has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin UK.

Daikin Airconditioning UK Limited The Heights Brooklands Weybridge Surrey KT13 0NY Tel 0845 6419000 Fax 0845 6419009 daikin.co.uk

Dedicated Heating Line: 0845 641 9070

**Scottish
Region**

0845 641 9330

**Northern
Region**

0845 641 9340

**Midlands
Region**

0845 641 9370

**Western
Region**

0845 641 9320

**North
London**

0845 641 9360

**South
London**

0845 641 9355